



August 5, 2004

State of Utah
Division of Oil, Gas & Mining
Attn: Diana Whitney
1594 West North Temple - Suite 1210
P.O. Box 145801
Salt Lake City, Utah 84114-5801

RE: Applications for Permit to Drill: Blackjack Federal 14-33-8-17, 16-33-8-17,
Federal 12-34-8-17, 13-34-8-17, 14-34-8-17, and 15-34-8-17.

Dear Diana:

Enclosed find APD's on the above referenced wells. There are a couple of them that are Exception Locations. Our Land Department will get the accompanying letters shortly. If you have any questions, feel free to give either Brad or myself a call.

Sincerely,

Mandie Crozier
Regulatory Specialist

mc
enclosures

RECEIVED

AUG 09 2004

DIV. OF OIL, GAS & MINING

001

Form 3160-3
(September 2001)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0136
Expires January 31, 2004

5. Lease Serial No.

UTU-79017

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA Agreement, Name and No.

N/A

8. Lease Name and Well No.

Federal 15-34-8-17

9. API Well No.

43-013-3 2628

10. Field and Pool, or Exploratory

Monument Butte

11. Sec., T., R., M., or Blk. and Survey or Area

SW/SE Sec. 34, T8S R17E

12. County or Parish

Duchesne

13. State

UT

17. Spacing Unit dedicated to this well

40 Acres

20. BLM/BIA Bond No. on file

UTU0056

23. Estimated duration

Approximately seven (7) days from spud to rig release.

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature

Name (Printed/Typed)

Mandie Crozier

Date

8/5/04

Title

Regulatory Specialist

Approved by (Signature)

Name (Printed/Typed)

BRADLEY G. HILL
ENVIRONMENTAL SCIENTIST III

Date

08-17-04

Title

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

RECEIVED

AUG 09 2004

Federal Approval of this
Action is Necessary

DIV. OF OIL, GAS & MINING

INLAND PRODUCTION COMPANY

1910
Brass Cap

1910
Brass Cap

N89°58'59"W - 2644.51' (Meas.)

$N89^{\circ}56'25''W - 2643.65'$ (Meas.)

1910
Brass Cap

N00°02'30"E - 2619.33' (Meas.)

N0°01'W (G.L.O.)

34

1910
Brass Cap

WELL LOCATION:
FEDERAL 15-34-8-17

ELEV. UNGRADED GROUND = 5051.9'

DRILLING
WINDOW

200'

2043'

1910
Brass Cap

N89°20'18"E - 2638.74' (Meas.)

N89°58'E (G.L.O.)

1910
Brass Cap

WELL LOCATION, FEDERAL 15-34-8-17,
LOCATED AS SHOWN IN THE SW 1/4 SE
1/4 OF SECTION 34, T8S, R17E,
S.L.B.&M. DUCHESNE COUNTY, UTAH.



THIS IS TO CERTIFY THAT THE ABOVE MAP WAS
PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
MADE BY ME OR UNDER MY SUPERVISION AND THAT
THE SAME ARE TRUE AND CORRECT TO THE BEST OF
MY KNOWLEDGE AND BELIEF. No. 189377

Y THAT THE ABOVE PART V
ELD NAMES OF ACTUAL
NOED MY SUPERVISION AND
E AND CORRECT TO THE
D RELIN

REGISTERED LAND SURVEYOR
No. 189377

STACY W.
STEWART
REGISTERED LAND SURVEYOR
No. 189377
STATE OF UTAH

STACY W. STEWART
REGISTERED LAND SURVEYOR
REGISTRATION No. 00099
STATE OF UTAH

TRI STATE LAND SURVEYING & CONSULTING
180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

SCALE: 1" = 1000'

SURVEYED BY: D.J.S.

DATE: 6-15-04

DRAWN BY: F.T.M.

NOTES:

FILE #

 = SECTION CORNERS LOCATED

BASIS OF ELEV; U.S.G.S. 7-1/2 min QUAD (PARIETTE DRAW SW)

**INLAND PRODUCTION COMPANY
FEDERAL #15-34-8-17
SW/SE SECTION 34, T8S, R17E
DUCHESNE COUNTY, UTAH**

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. GEOLOGIC SURFACE FORMATION:

Uinta formation of Upper Eocene Age

2. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

Uinta	0' – 1640'
Green River	1640'
Wasatch	6120'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:

Green River Formation 1640' – 6500' - Oil

4. PROPOSED CASING PROGRAM

Please refer to the Monument Butte Field Standard Operation Procedure (SOP).

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Please refer to the Monument Butte Field SOP. See Exhibit "C".

6. TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:

Please refer to the Monument Butte Field SOP.

7. AUXILIARY SAFETY EQUIPMENT TO BE USED:

Please refer to the Monument Butte Field SOP.

8. TESTING, LOGGING AND CORING PROGRAMS:

Please refer to the Monument Butte Field SOP.

9. ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:

The anticipated maximum bottom hole pressure is 2000 psi. It is not anticipated that abnormal temperatures will be encountered.

10. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:

Please refer to the Monument Butte Field SOP.

**INLAND PRODUCTION COMPANY
FEDERAL #15-34-8-17
SW/SE SECTION 34, T8S, R17E
DUCHESNE COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Inland Production Company well location site Federal #15-34-8-17 located in the SW 1/4 SE 1/4 Section 34, T8S, R17E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.6 miles \pm to the junction of this highway and UT State Hwy 53; proceed southeasterly along Hwy 53 - 13.9 miles \pm to it's junction with an existing road to the northeast; proceed northeasterly - 0.6 miles \pm to it's junction with an existing road to the northeast; proceed northeasterly - 1.6 miles \pm to it's junction with an existing road to the northwest; proceed northwesterly - 0.3 miles \pm to it's junction with the beginning of the proposed access road to the southwest; proceed southwesterly along the proposed access road - 935' \pm to the proposed well location.

2. PLANNED ACCESS ROAD

See Topographic Map "B" for the location of the proposed access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

Please refer to the Monument Butte Field Standard Operating Procedure (SOP).

5. LOCATION AND TYPE OF WATER SUPPLY

Please refer to the Monument Butte Field SOP. See Exhibit "A".

6. SOURCE OF CONSTRUCTION MATERIALS

Please refer to the Monument Butte Field SOP.

7. METHODS FOR HANDLING WASTE DISPOSAL

Please refer to the Monument Butte Field SOP.

8. ANCILLARY FACILITIES

Please refer to the Monument Butte Field SOP.

9. **WELL SITE LAYOUT**

See attached Location Layout Diagram.

10. **PLANS FOR RESTORATION OF SURFACE**

Please refer to the Monument Butte Field SOP.

11. **SURFACE OWNERSHIP** - Bureau Of Land Management

12. **OTHER ADDITIONAL INFORMATION**

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report #04-94, 6/2/04. Paleontological Resource Survey prepared by, Wade E. Miller, 7/9/04. See attached report cover pages, Exhibit "D".

Inland Production Company requests 50' of disturbed area be granted for the Federal #15-34-8-17 to allow for construction of a 6" gas gathering line, and a 3" poly fuel gas line. Both lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** For a ROW plan of development, please refer to the Monument Butte Field SOP.

Inland Production Company also requests 50' of disturbed area be granted for the Federal #15-34-8-17 to allow for construction of a 3" steel water injection line and a 3" poly water return line. **Refer to Topographic Map "C."** For a ROW plan of development, please refer to the Monument Butte Field SOP.

Water Disposal

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Inland's secondary recovery project.

Water not meeting quality criteria, is disposed at Inland's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

Reserve Pit Liner

Please refer to the Monument Butte Field SOP.

Location and Reserve Pit Reclamation

Please refer to the Monument Butte Field SOP.

The following seed mixture will be used on the topsoil stockpile, to the recontoured surface of the reserve pit, and for final reclamation: (All poundages are in pure live seed)

Gardners Saltbush	<i>Atriplex gardneri</i>	6 lbs/acre
-------------------	--------------------------	------------

Details of the On-Site Inspection

The proposed Federal #15-34-8-17 was on-sited on 3/26/04. The following were present; Brad Mecham (Inland Production), Byron Tolman (Bureau of Land Management), and a SWCA representative. Weather conditions were clear at 60 degrees.

13. **LESSEE'S OR OPERATORS REPRESENTATIVE AND CERTIFICATION**

Representative

Name: Brad Mecham
Address: Route #3 Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that INLAND PRODUCTION COMPANY is considered to be the operator of well #15-34-8-17 SW/SE Section 34, Township 8S, Range 17E: Lease UTU-79017 Duchesne County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by Hartford Accident #4488944.

I hereby certify that the proposed drillsite and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Inland Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.


8/5/04
Date

Mandie Crozier
Mandie Crozier
Regulatory Specialist

INLAND PRODUCTION COMPANY

Federal 15-34-8-17

Section 34, T8S, R17E, S.L.B.&M.

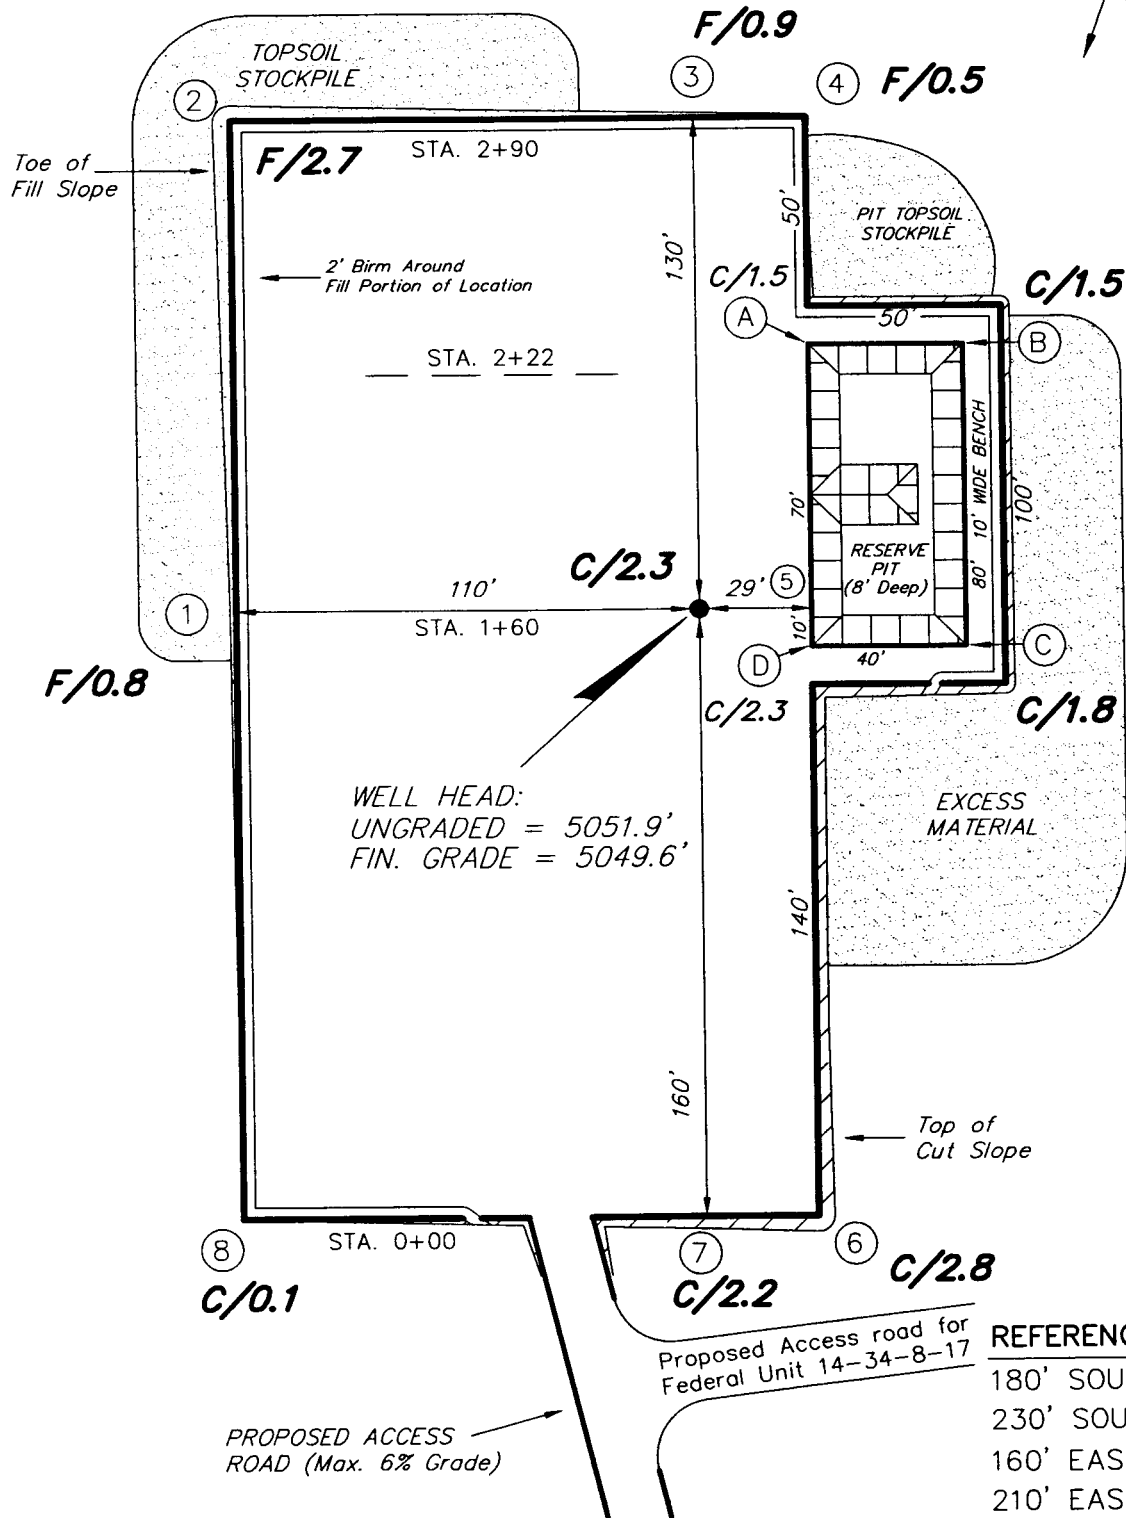

REFERENCE POINTS

180' SOUTH = 5047.9'
230' SOUTH = 5048.7'
160' EAST = 5048.0'
210' EAST = 5050.0'

SURVEYED BY: D.J.S.

SCALE: 1" = 50'

DRAWN BY: F.T.M.

DATE: 6-15-04

Tri State
Land Surveying, Inc.





(435) 781-2501

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

INLAND PRODUCTION COMPANY

CROSS SECTIONS

Federal 15-34-8-17

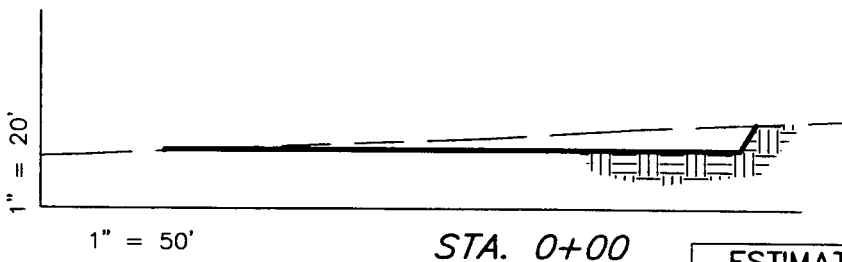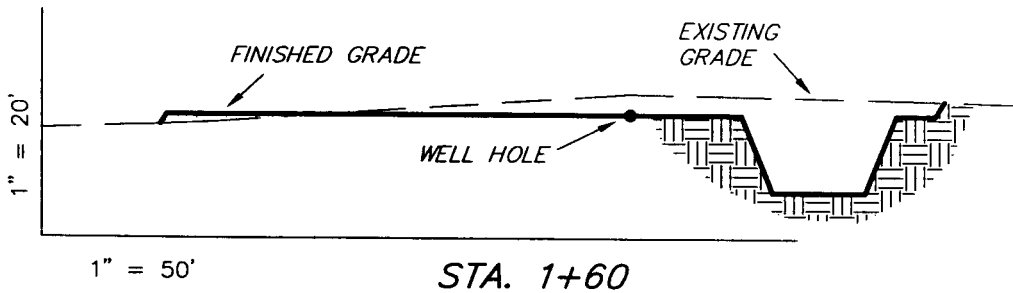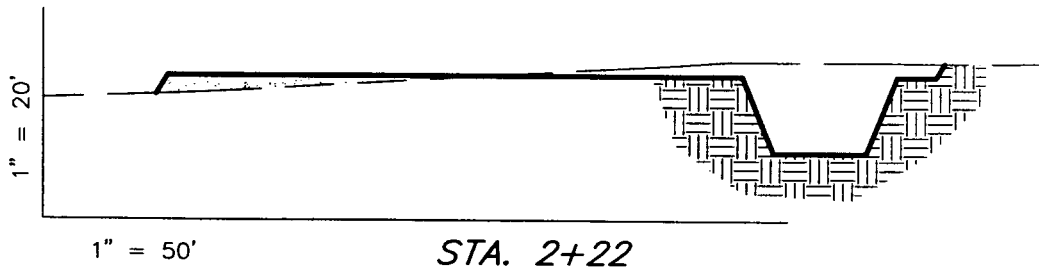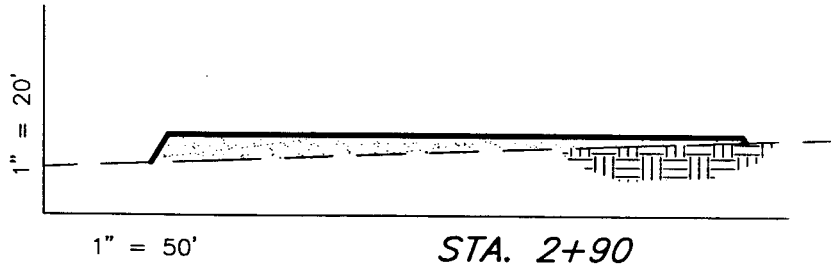

NOTE:
UNLESS OTHERWISE NOTED
ALL CUT/FILL SLOPES ARE
AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)				
ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	990	980	Topsoil is not included in Pad Cut	10
PIT	640	0		640
TOTALS	1,630	980	890	650

SURVEYED BY: D.J.S.

SCALE: 1" = 50'


DRAWN BY: F.T.M.

DATE: 6-15-04


(435) 781-2501

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

Federal 15-34-8-17



Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

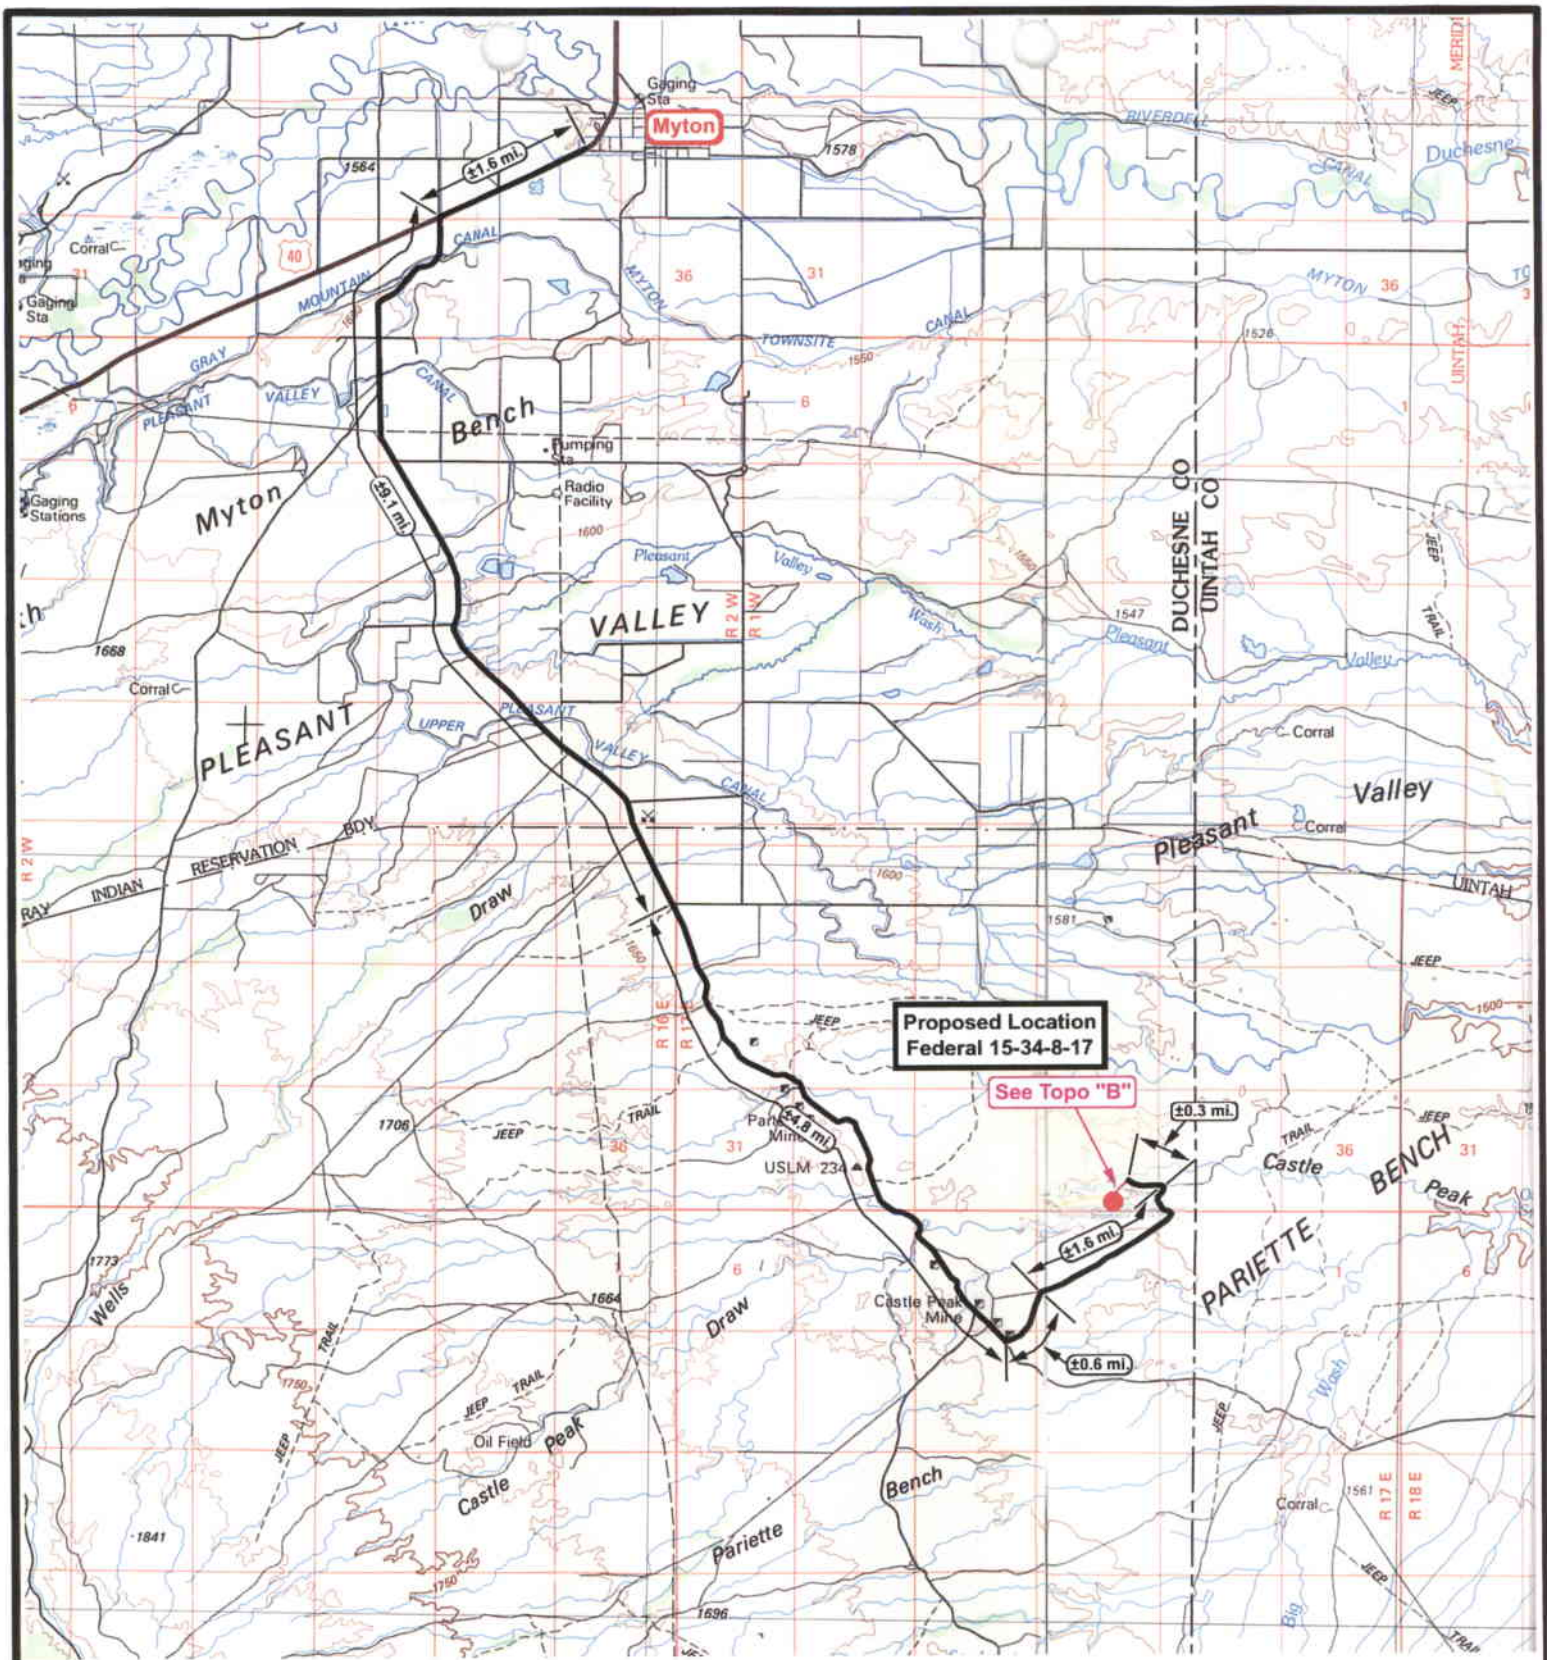

Federal 15-34-8-17
SEC. 34, T8S, R17E, S.L.B.&M.



Tri-State
Land Surveying Inc.
 (435) 781-2501
 38 West 100 North Vernal, Utah 84078


SCALE: 1 : 100,000
 DRAWN BY: bgm
 DATE: 07-02-2004

Legend

— Existing Road
 — Proposed Access

TOPOGRAPHIC MAP

"A"

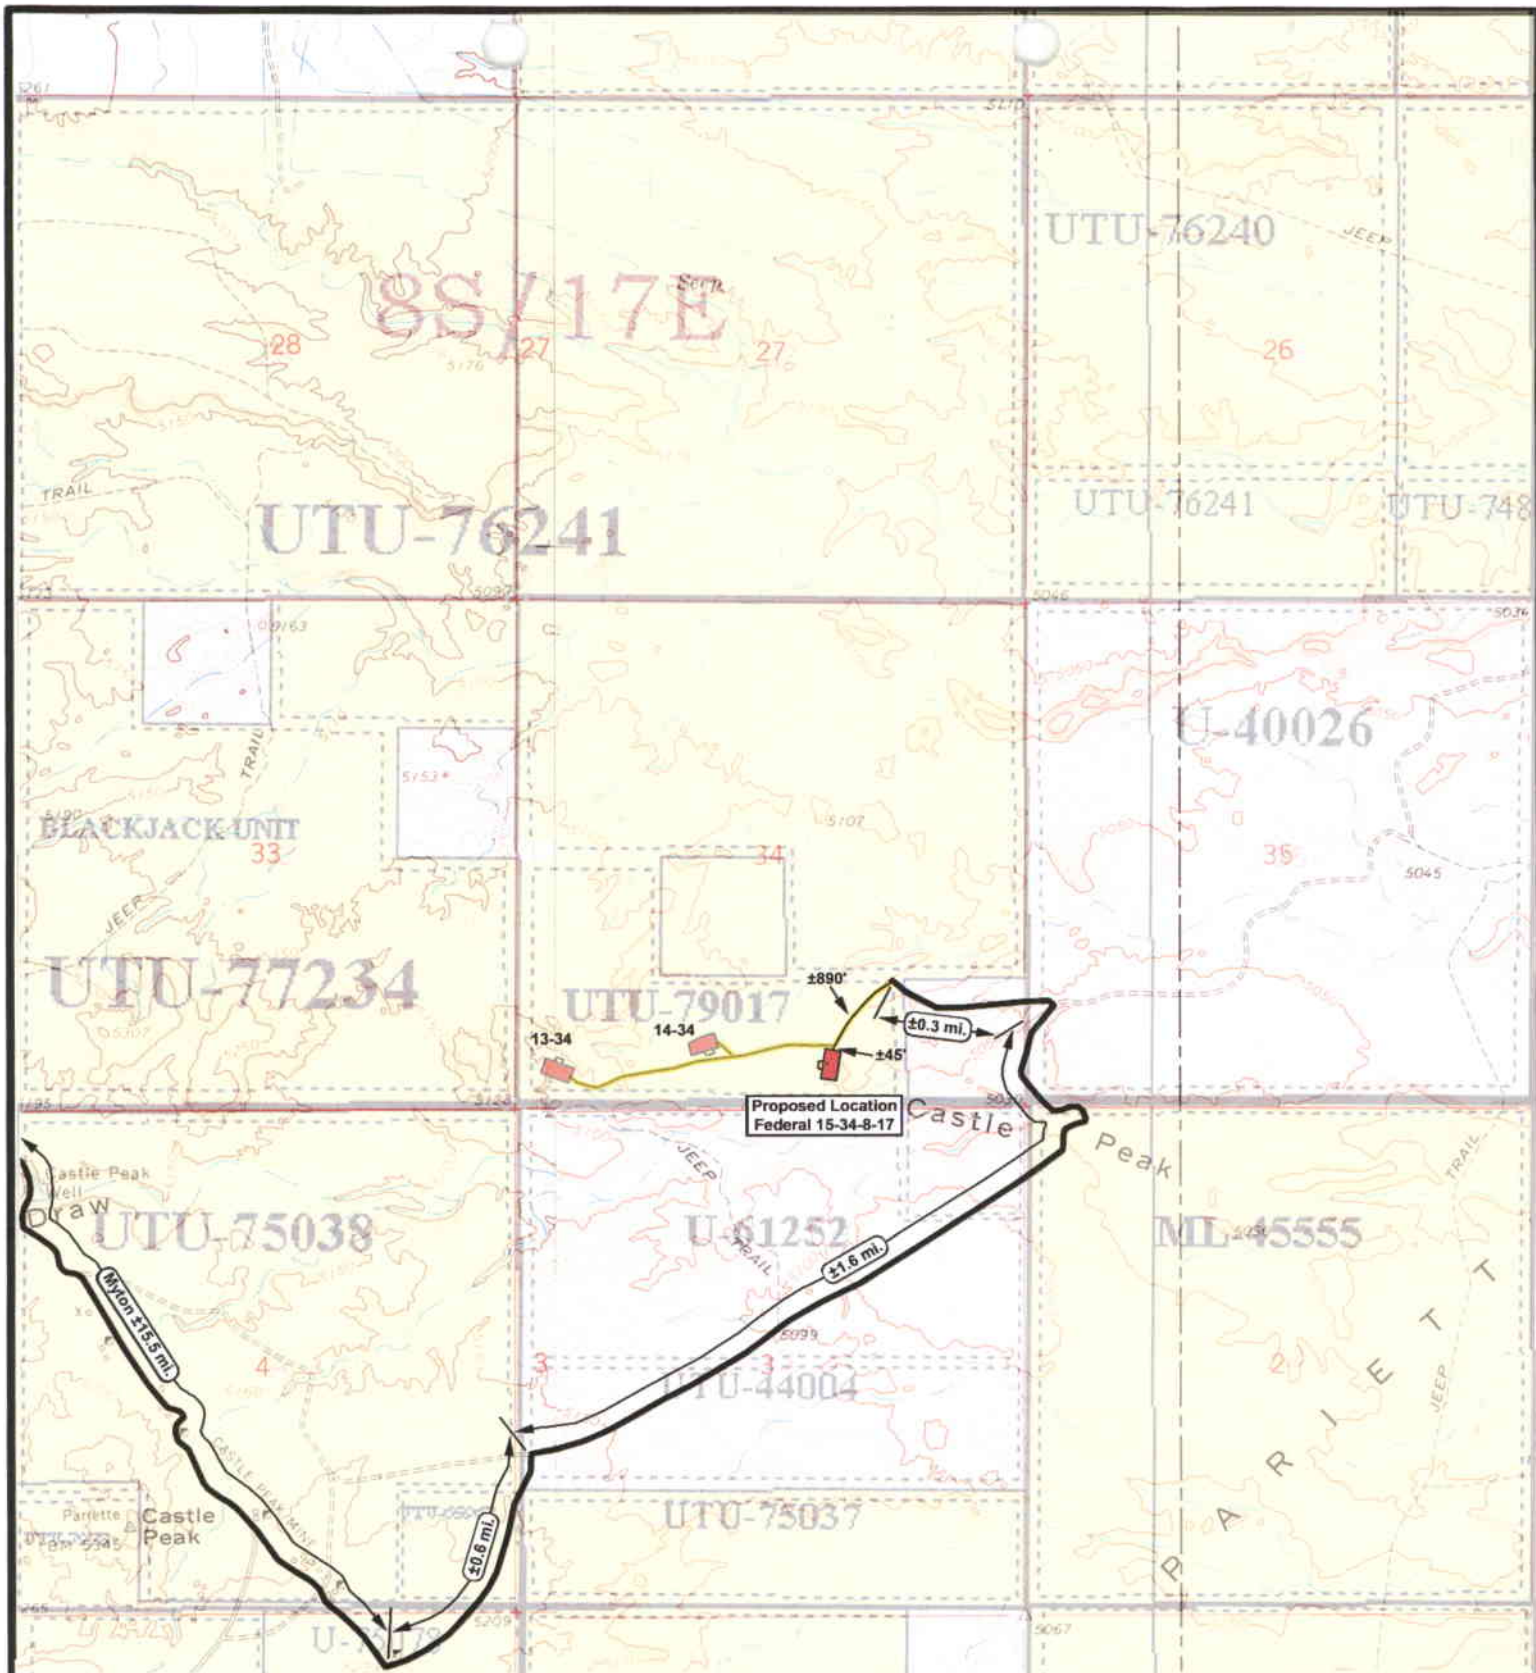

**Federal 15-34-8-17
SEC. 34, T8S, R17E, S.L.B.&M.**




**Tri-State
Land Surveying Inc.**
(435) 781-2501
38 West 100 North Vernal, Utah 84078

SCALE: 1" = 2000'
DRAWN BY: bgm
DATE: 07-02-2004

Legend
— Existing Road
— Proposed Access

TOPOGRAPHIC MAP

"B"

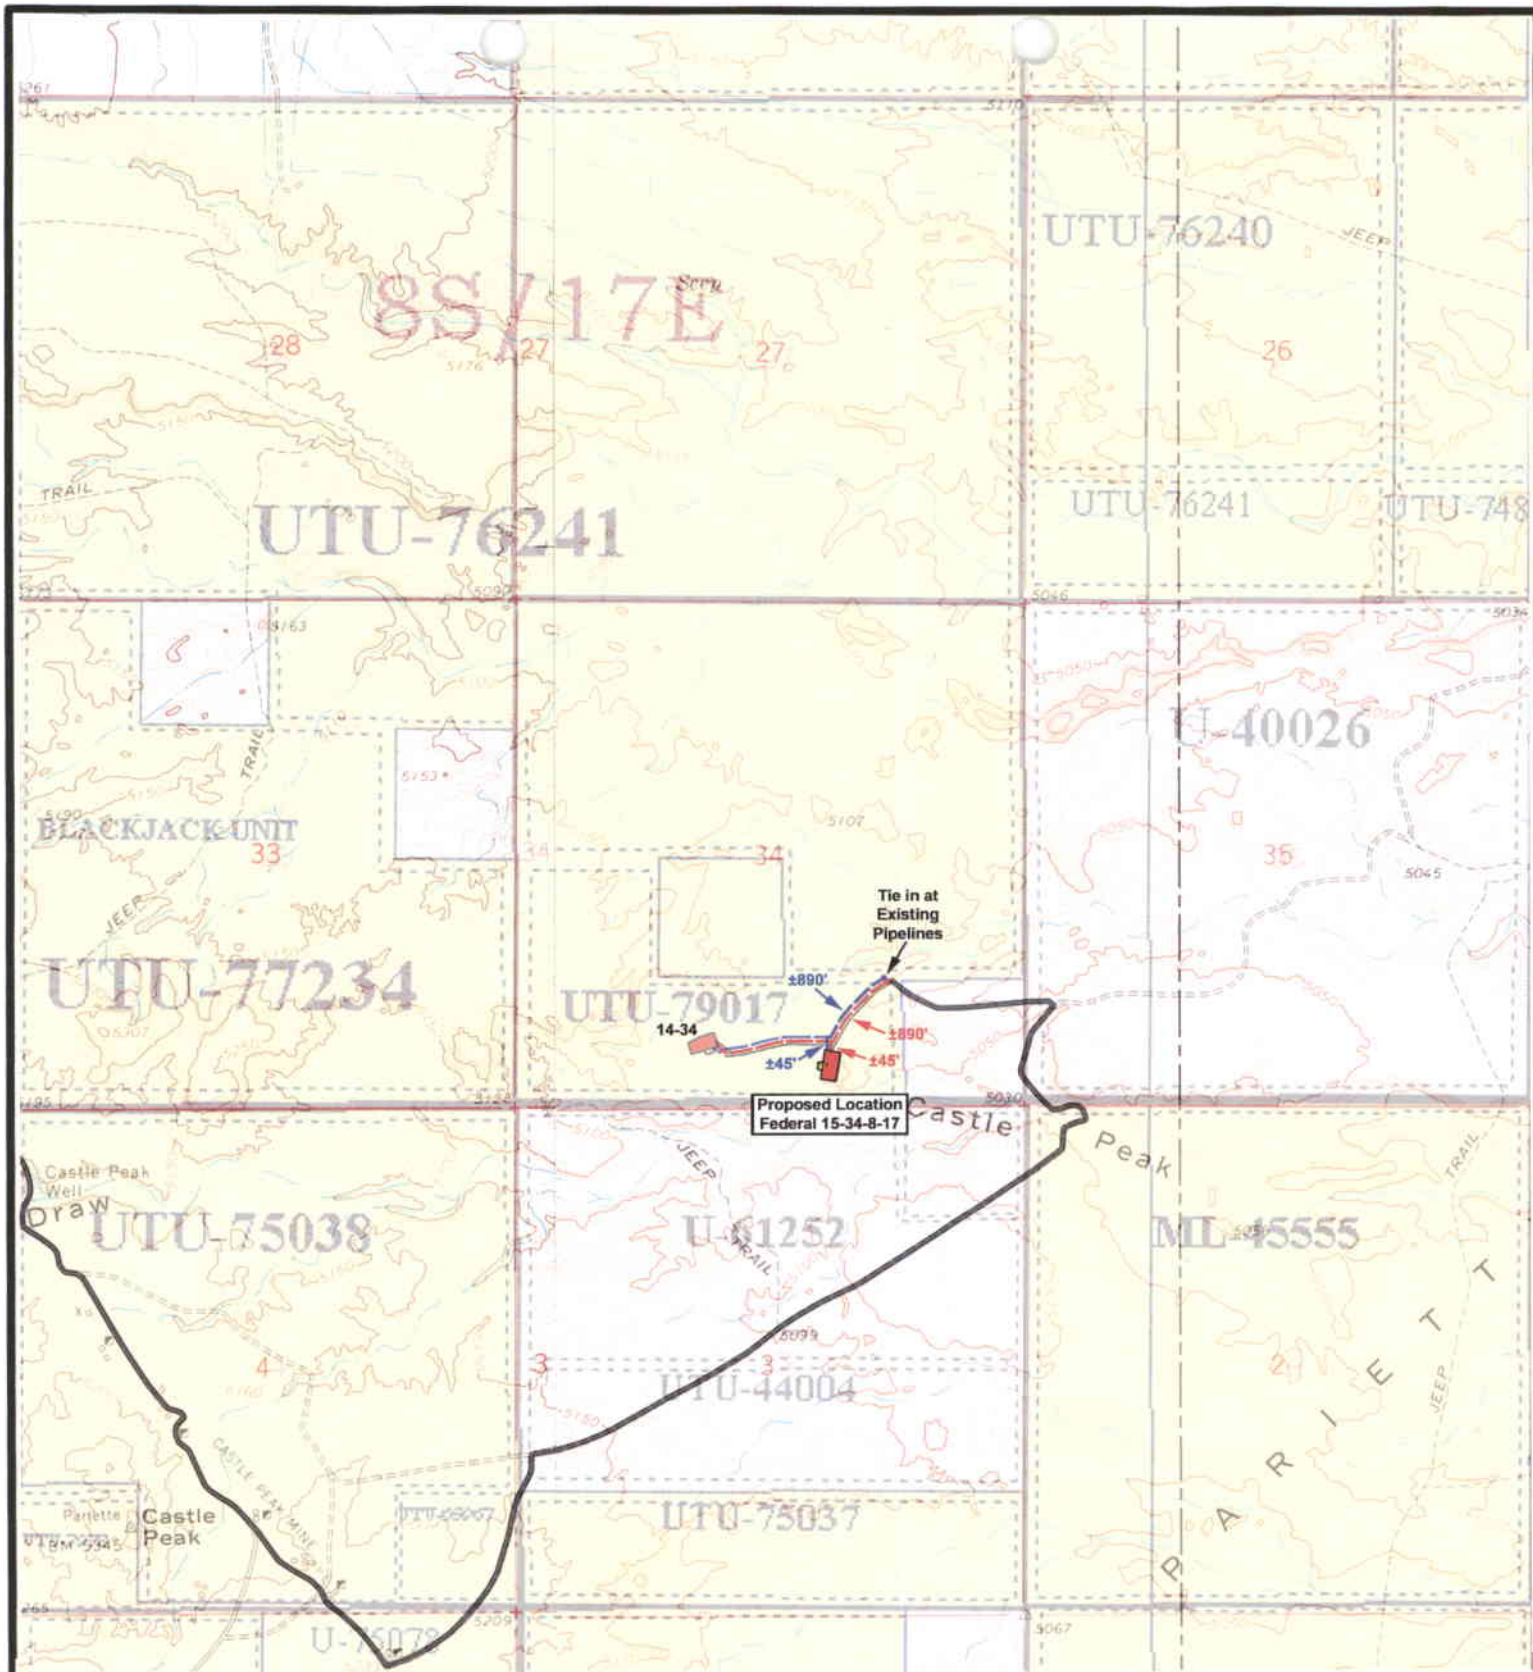

Federal 15-34-8-17
SEC. 34, T8S, R17E, S.L.B.&M.



Tri-State
Land Surveying Inc.
 (435) 781-2501
 38 West 100 North Vernal, Utah 84078


SCALE: 1" = 2000'
 DRAWN BY: bgm
 DATE: 07-02-2004


Legend

- Roads
- - - Proposed Gas Line
- - - Proposed Water Line

TOPOGRAPHIC MAP

"C"

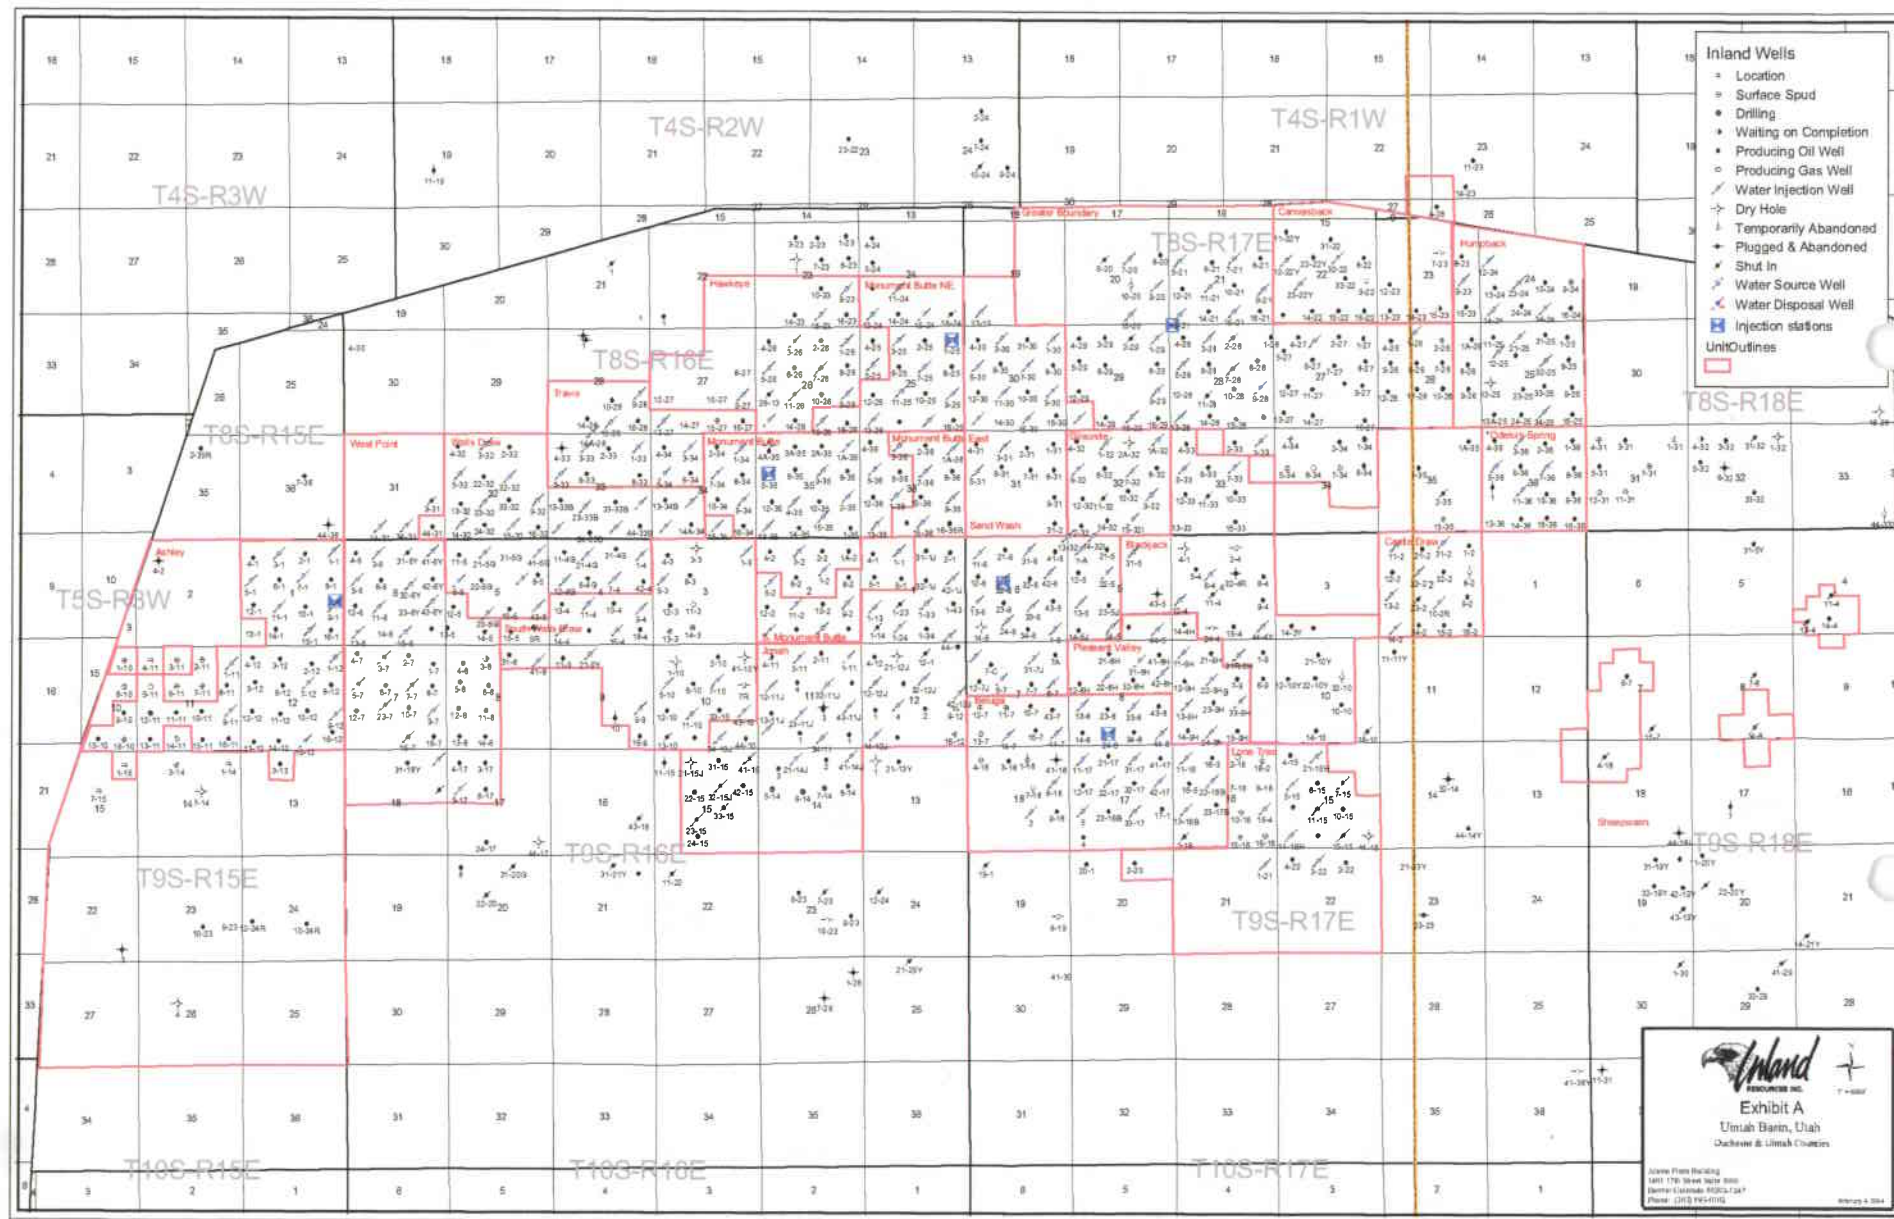

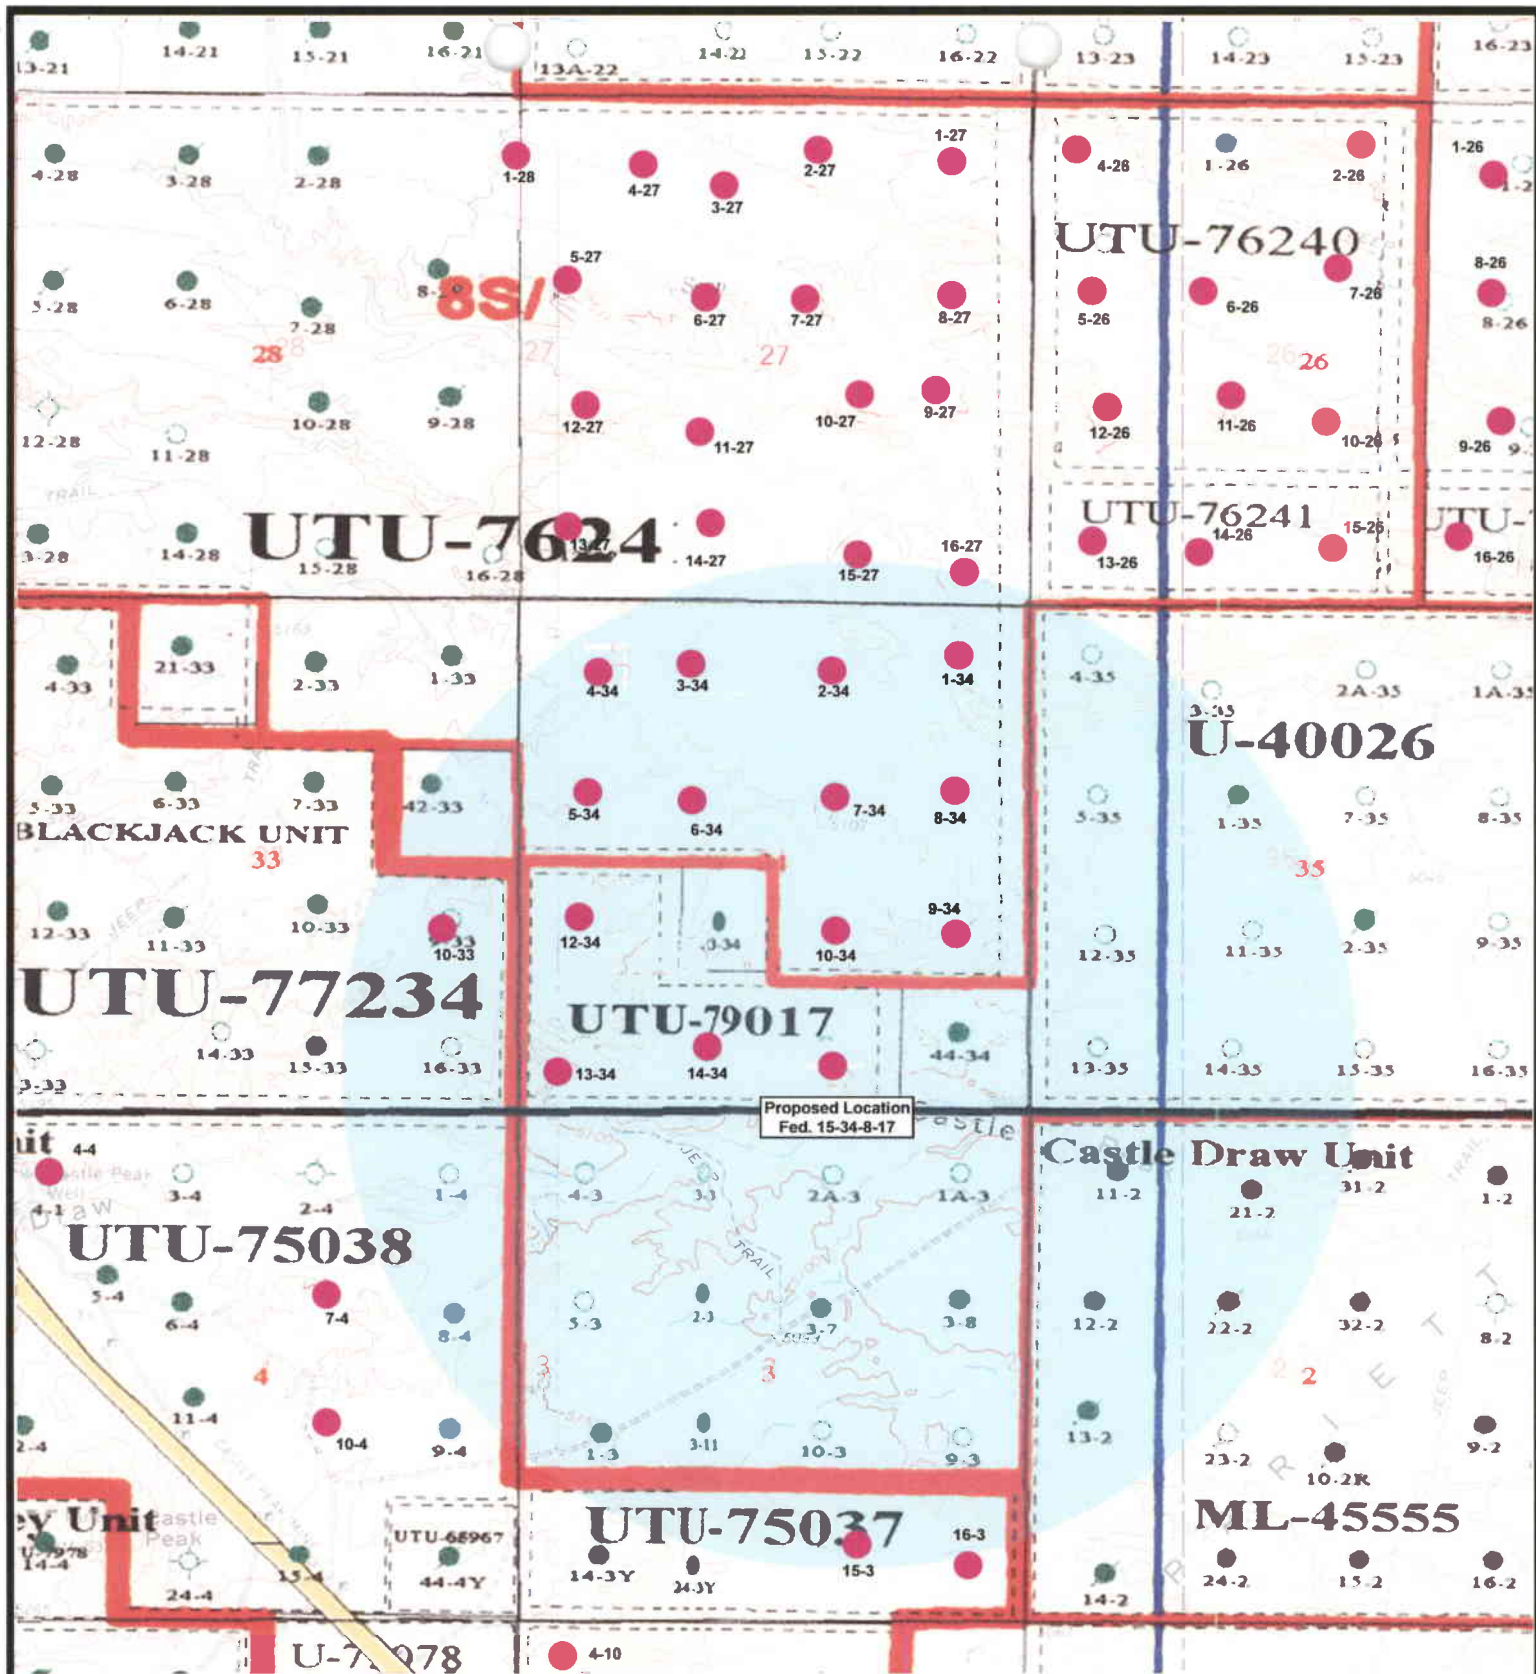

**Federal 15-34-8-17
SEC. 34, T8S, R17E, S.L.B.&M.**



**Tri-State
Land Surveying Inc.**
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2000'
DRAWN BY: bgm
DATE: 06-30-2004

Legend

- Well Pad Locations
- One Mile Radius

Exhibit "B"

2-M SYSTEM

Blowout Prevention Equipment Systems

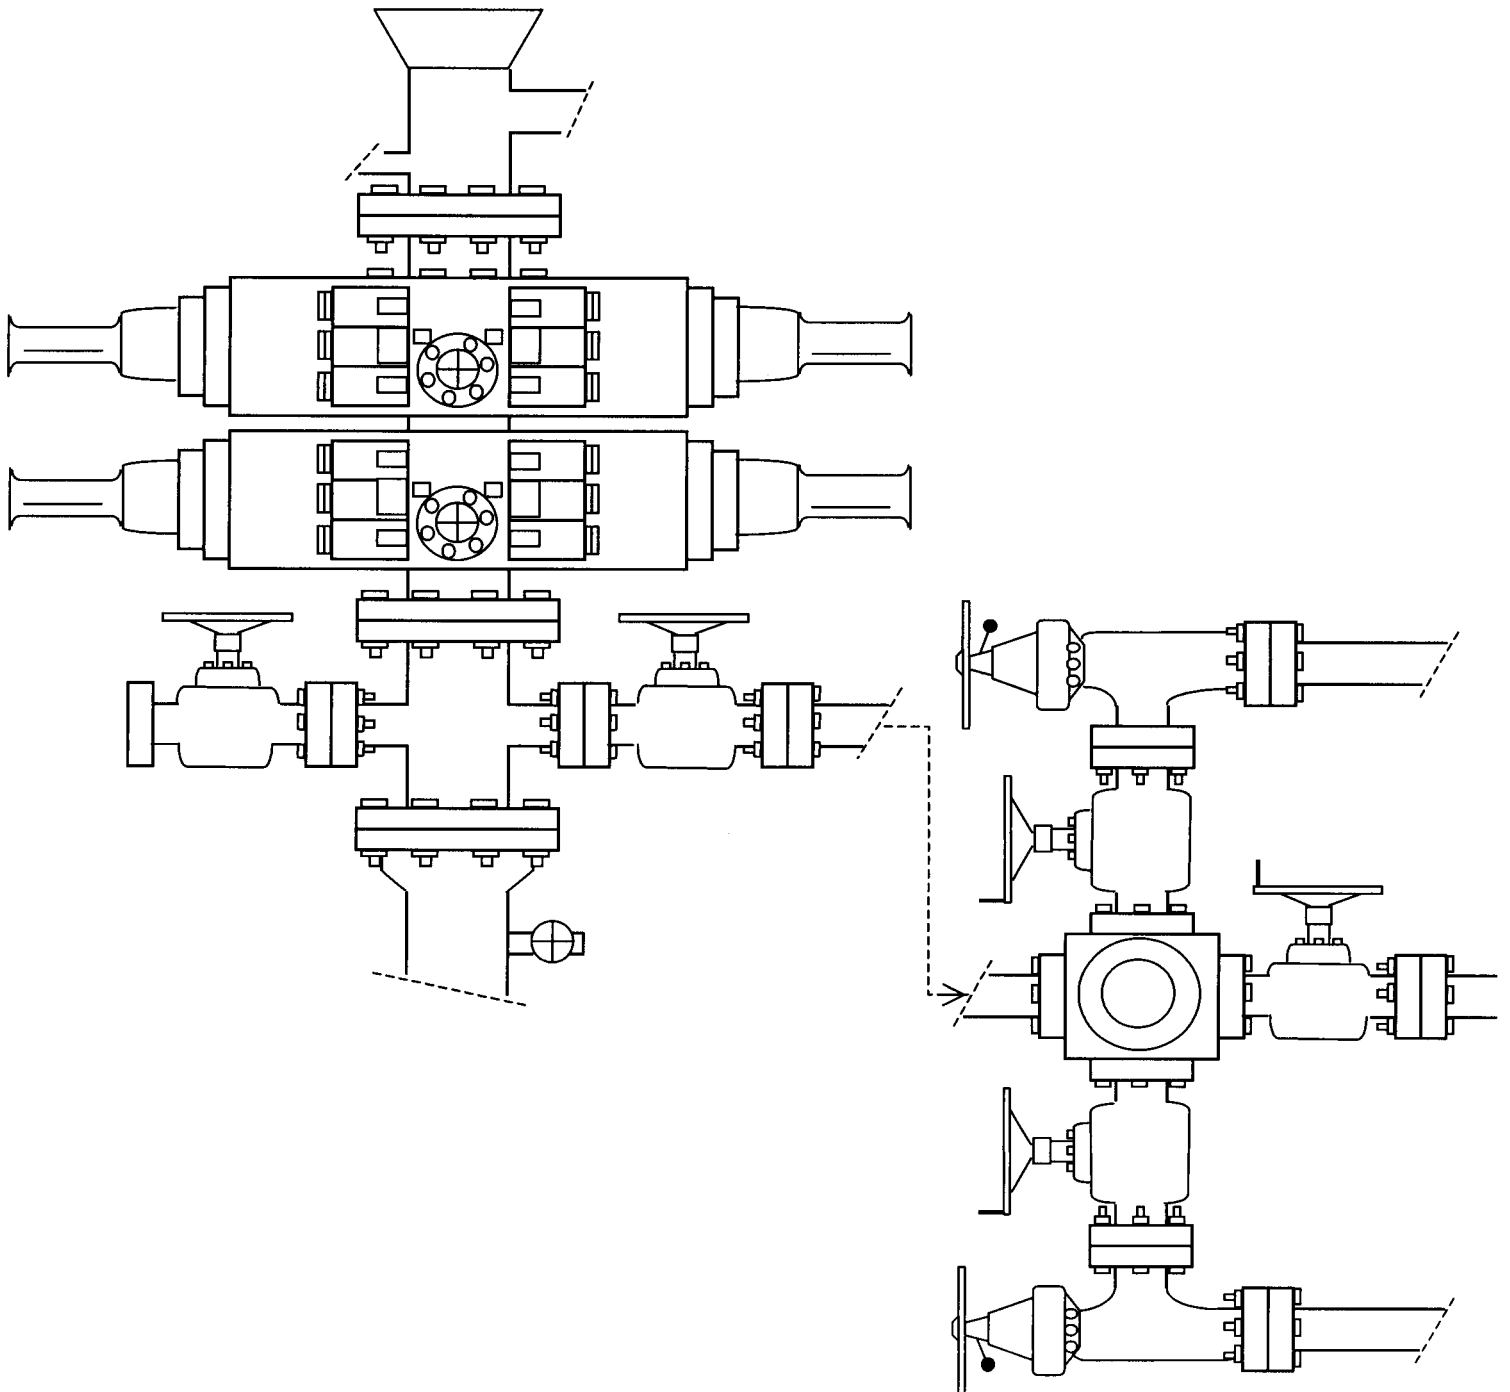


EXHIBIT C

CULTURAL RESOURCE INVENTORY OF INLAND
RESOURCES' SIX BLOCK PARCELS (T8S, R17E, SEC. 20, 33, 34;
T9S R16E S. 15; T9S R17E S. 17, 20; and T9S R18E S. 7)
DUCHESNE AND Uintah COUNTIES, UTAH

by

Melissa Elkins
and
Keith Montgomery

Prepared For:

Bureau of Land Management
Vernal Field Office

Prepared Under Contract With:

Inland Resources
Route 3 Box 3630
Myton, UT 84052

Prepared By:


Montgomery Archaeological Consultants
P.O. Box 147
Moab, Utah 84532

MOAC Report No. 04-94







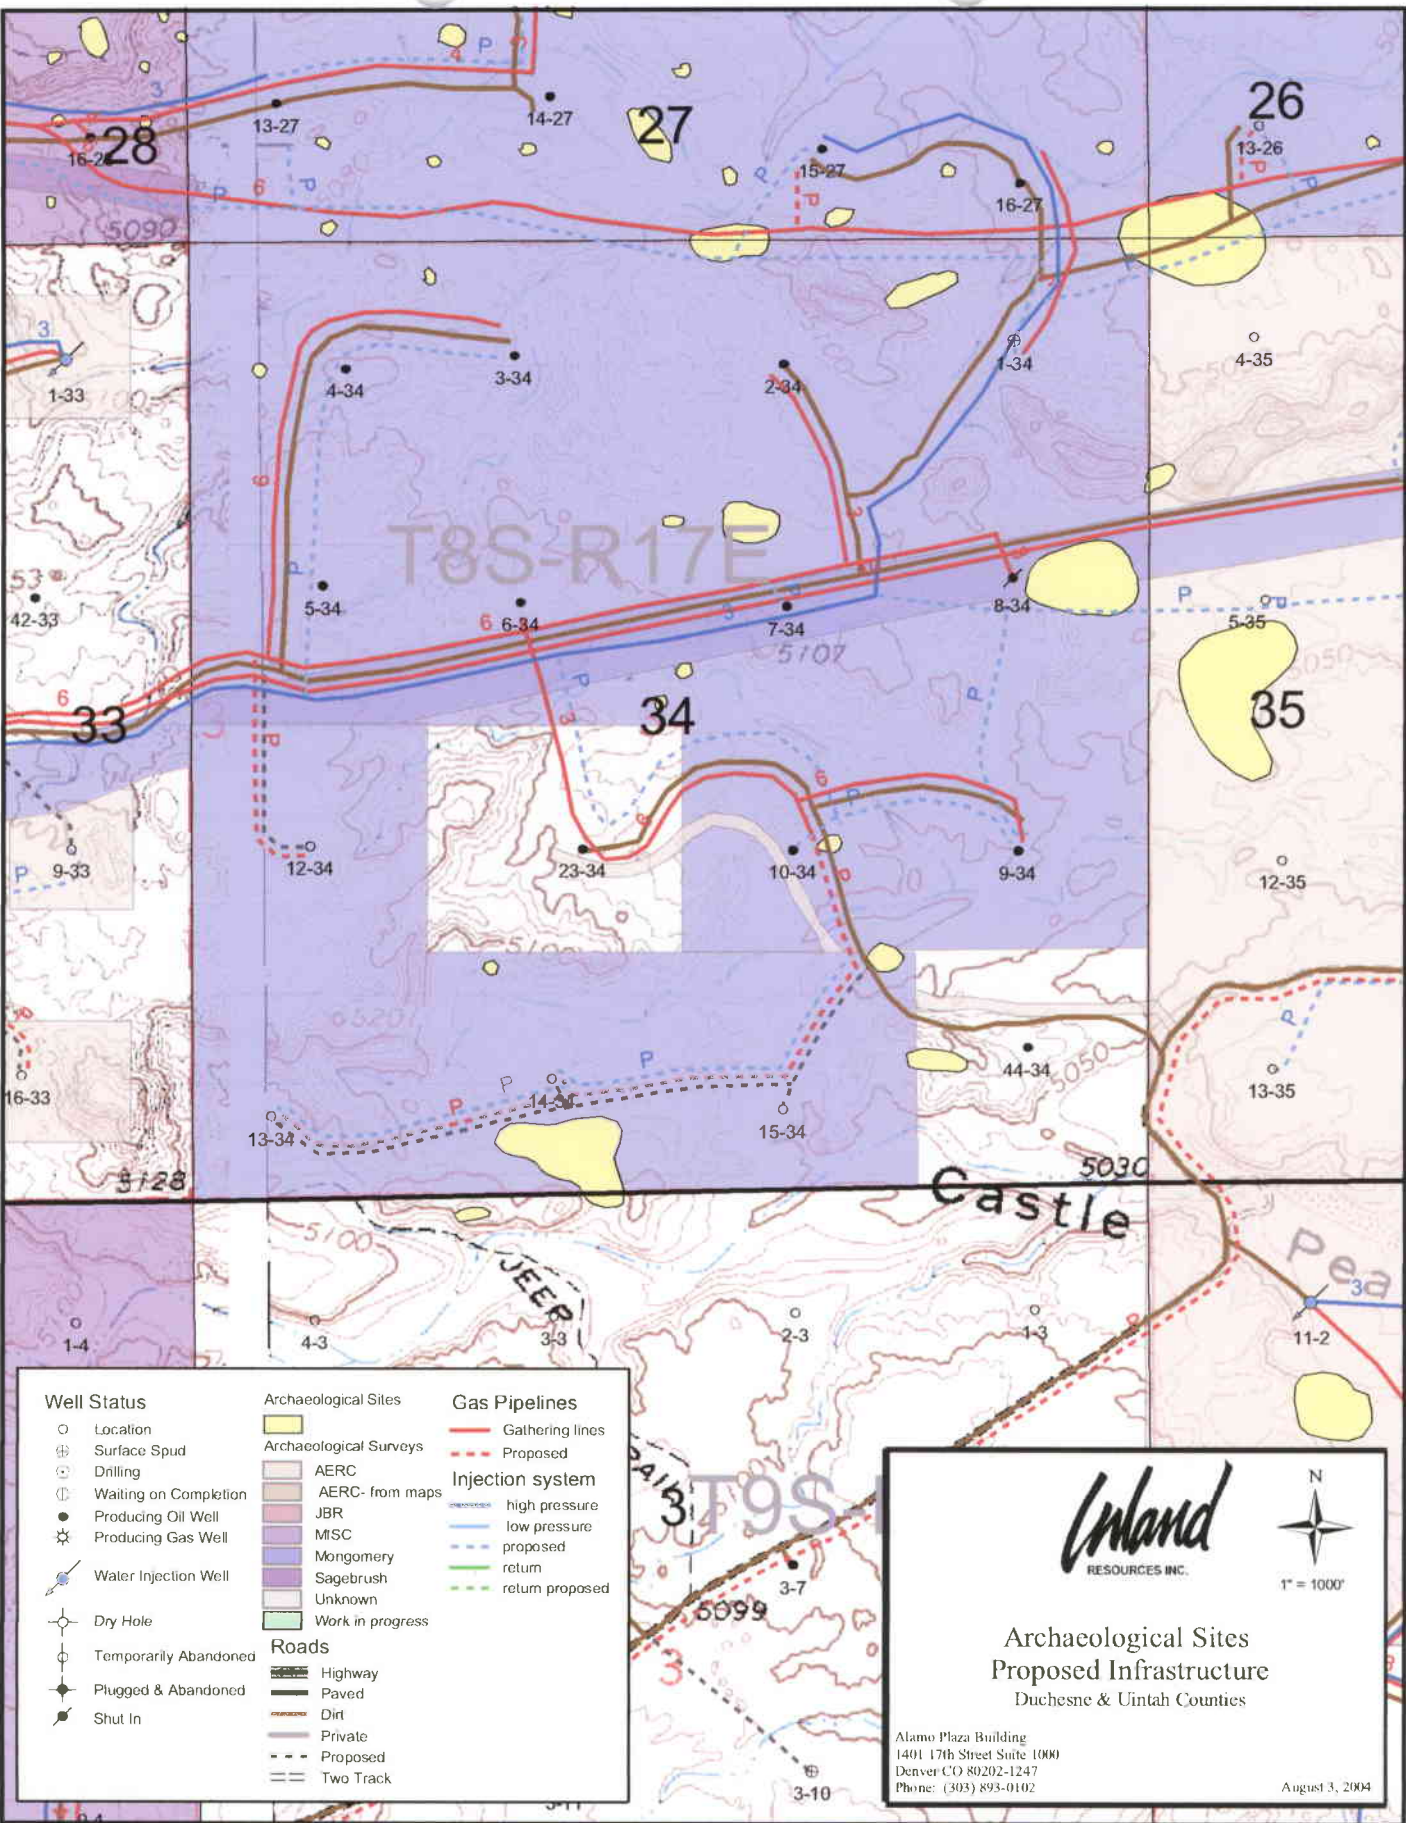



June 2, 2004

United States Department of Interior (FLPMA)
Permit No. 04-UT-60122

State of Utah Antiquities Project (Survey)
Permit No. U-04-MQ-0436b,p



Well Status

-  Location
-  Surface Spud
-  Drilling
-  Waiting on Completion
-  Producing Oil Well
-  Producing Gas Well
-  Water Injection Well
-  Dry Hole
-  Temporarily Abandoned
-  Plugged & Abandoned
-  Shut In

Archaeological Sites







Archaeological Surveys

- AERC
- AERC- from maps
- JBR
- MISC
- Montgomery
- Sagebrush
- Unknown
- Work in progress

Roads

-  Highway
 Paved
 Dirt
 Private
 Proposed
 Two Track

Gas Pipelines

-  Gathering lines
 Proposed
Injection system
 high pressure
 low pressure
 proposed
 return
 return proposed

Inland
RESOURCES INC.


$$1^{\circ} = 1000'$$

Archaeological Sites
Proposed Infrastructure
Duchesne & Uintah Counties

Alamo Plaza Building
1401 17th Street Suite 1000
Denver CO 80202-1247
Phone: (303) 893-0102

August 3, 2004

INLAND RESOURCES, INC.

**PALEONTOLOGICAL FIELD SURVEY OF PROPOSED
PRODUCTION DEVELOPMENT AREAS,
DUCHESNE & UINTAH COUNTIES, UTAH**

Section 34, T 8 S, R 17 E (NW/SW, SW/SW, SE/SW, SW/SE);
Section 20, T 8 S, R 17 E (NW/SE); Section 17, T 9 S, R 17 E
(SE/SW, SW/SE, SE/SE); Section 20, T 9 S, R 17 E (NE/NE, NE/NW);
Section 8, T 9 S, R 18 E (excluding NW/NW, SW/NE, NE/SW, NW/SW, SW/SE)


REPORT OF SURVEY

Prepared for:

Inland Resources, Inc.

Prepared by:

Wade E. Miller
Consulting Paleontologist
July 9, 2004

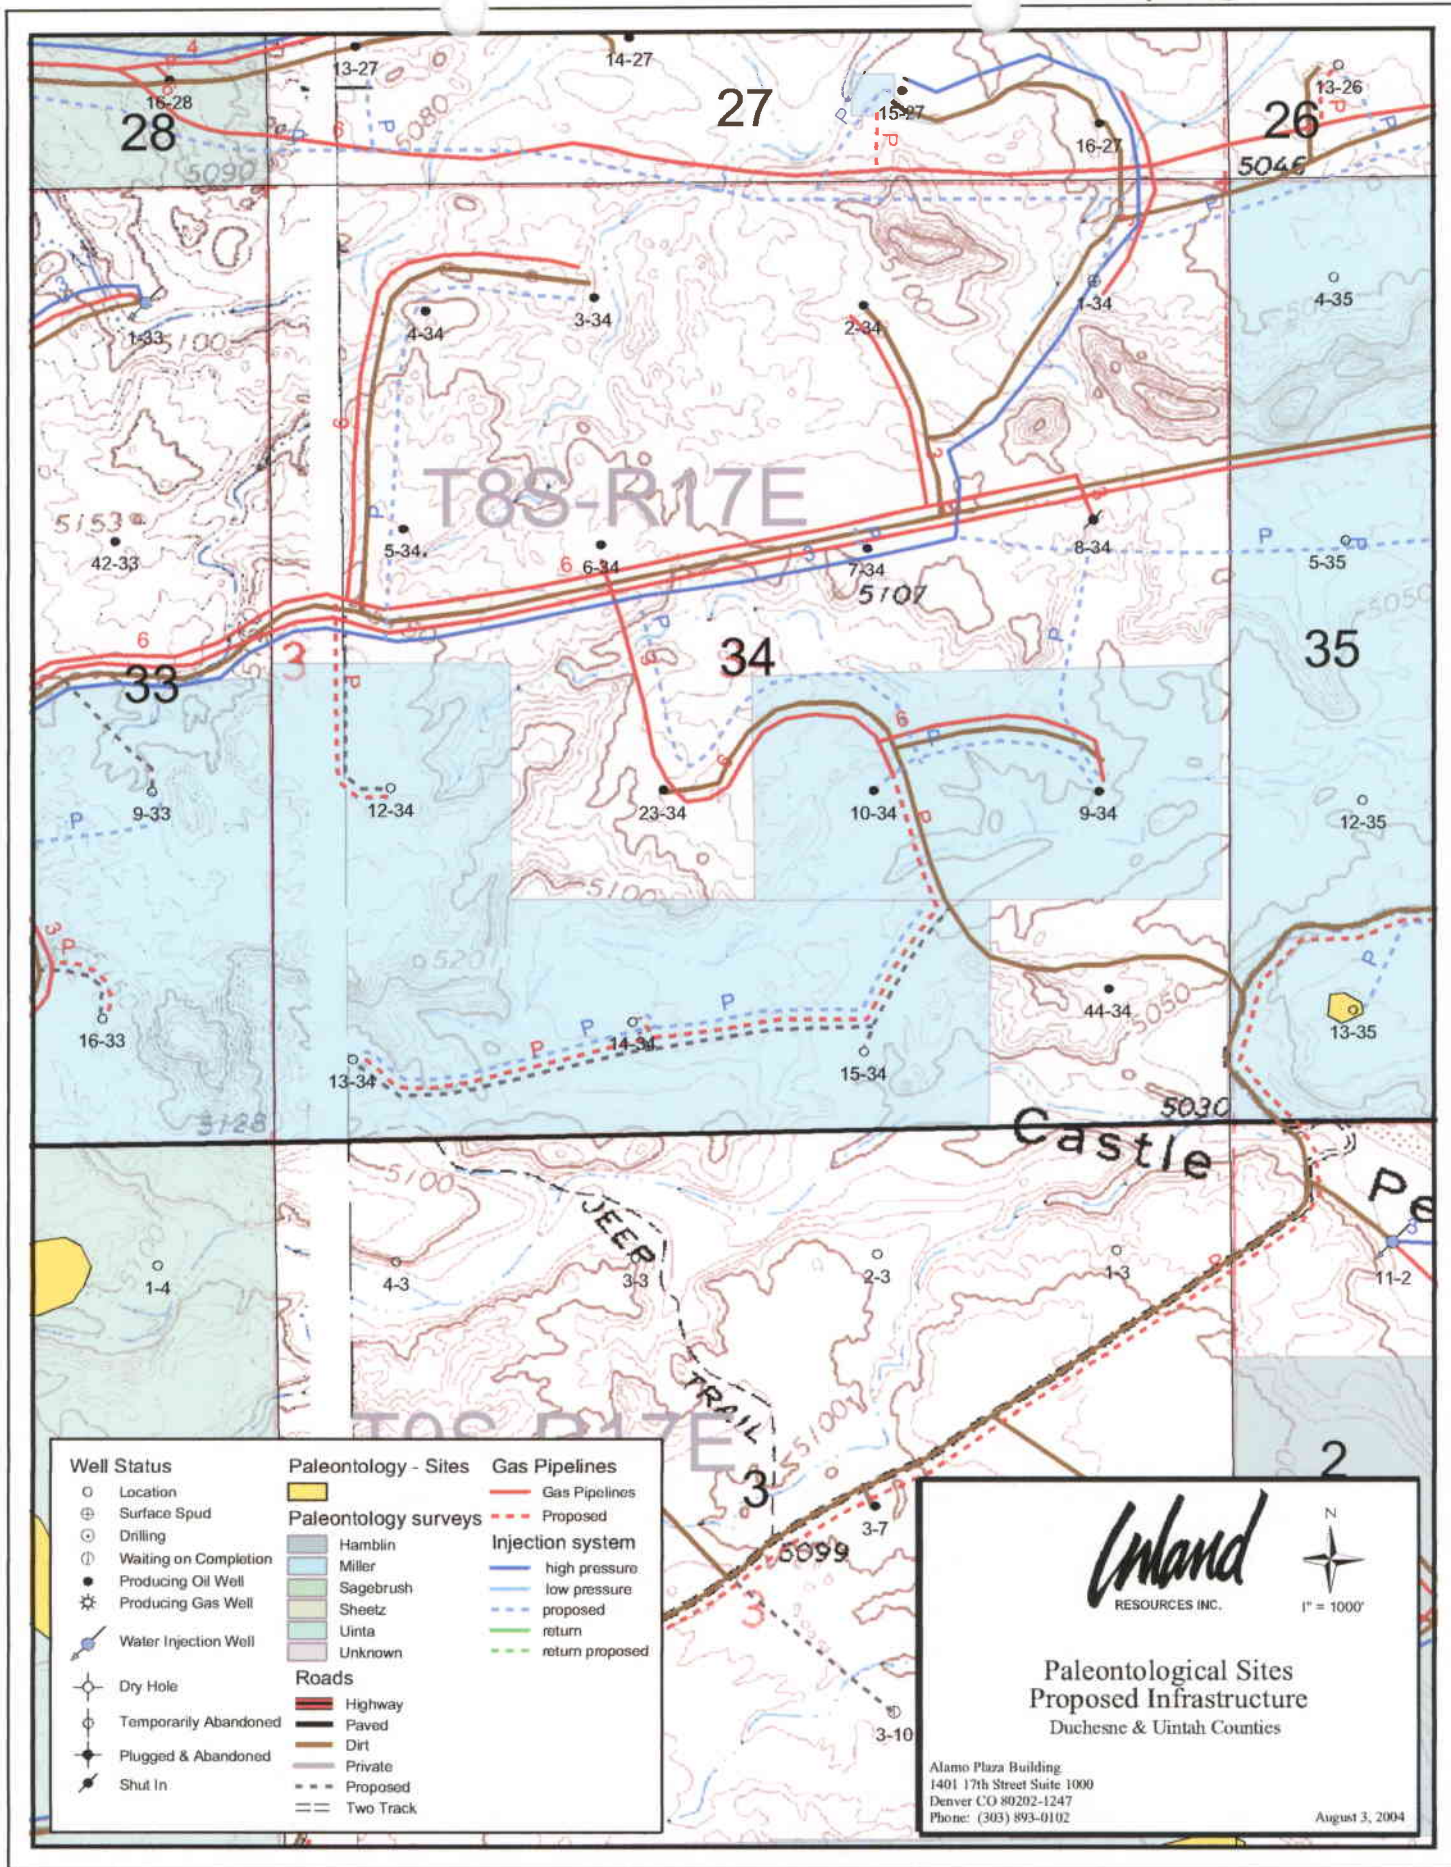

003

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 08/09/2004

API NO. ASSIGNED: 43-013-32628

WELL NAME: FEDERAL 15-34-8-17

OPERATOR: INLAND PRODUCTION (N5160)

CONTACT: MANDIE CROZIER

PHONE NUMBER: 435-646-3721

PROPOSED LOCATION:

SWSE 34 080S 170E

SURFACE: 0473 FSL 2043 FEL

BOTTOM: 0473 FSL 2043 FEL

DUCHESNE

MONUMENT BUTTE (105)

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-79017

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: GRRV

COALBED METHANE WELL? NO

INSPECT LOCATN BY: / /

Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LATITUDE: 40.06865

LONGITUDE: -109.9899

RECEIVED AND/OR REVIEWED:

☒ Plat☒ Bond: Fed[1] Ind[] Sta[] Fee[]
(No. UTU0056)☒ Potash (Y/N)☒ Oil Shale 190-5 (B) or 190-3 or 190-13☒ Water Permit(No. MUNICIPAL)☒ RDCC Review (Y/N)

(Date: _____)

☒ Fee Surf Agreement (Y/N)

LOCATION AND SITING:

 R649-2-3.

Unit _____

☒ R649-3-2. GeneralSiting: 460 From Qtr/Qtr & 920' Between Wells R649-3-3. Exception Drilling Unit

Board Cause No: _____

Eff Date: _____

Siting: _____


 R649-3-11. Directional Drill

COMMENTS:

Sup, Separate file

STIPULATIONS:

1- Federal Approval
2- Spacing Strip

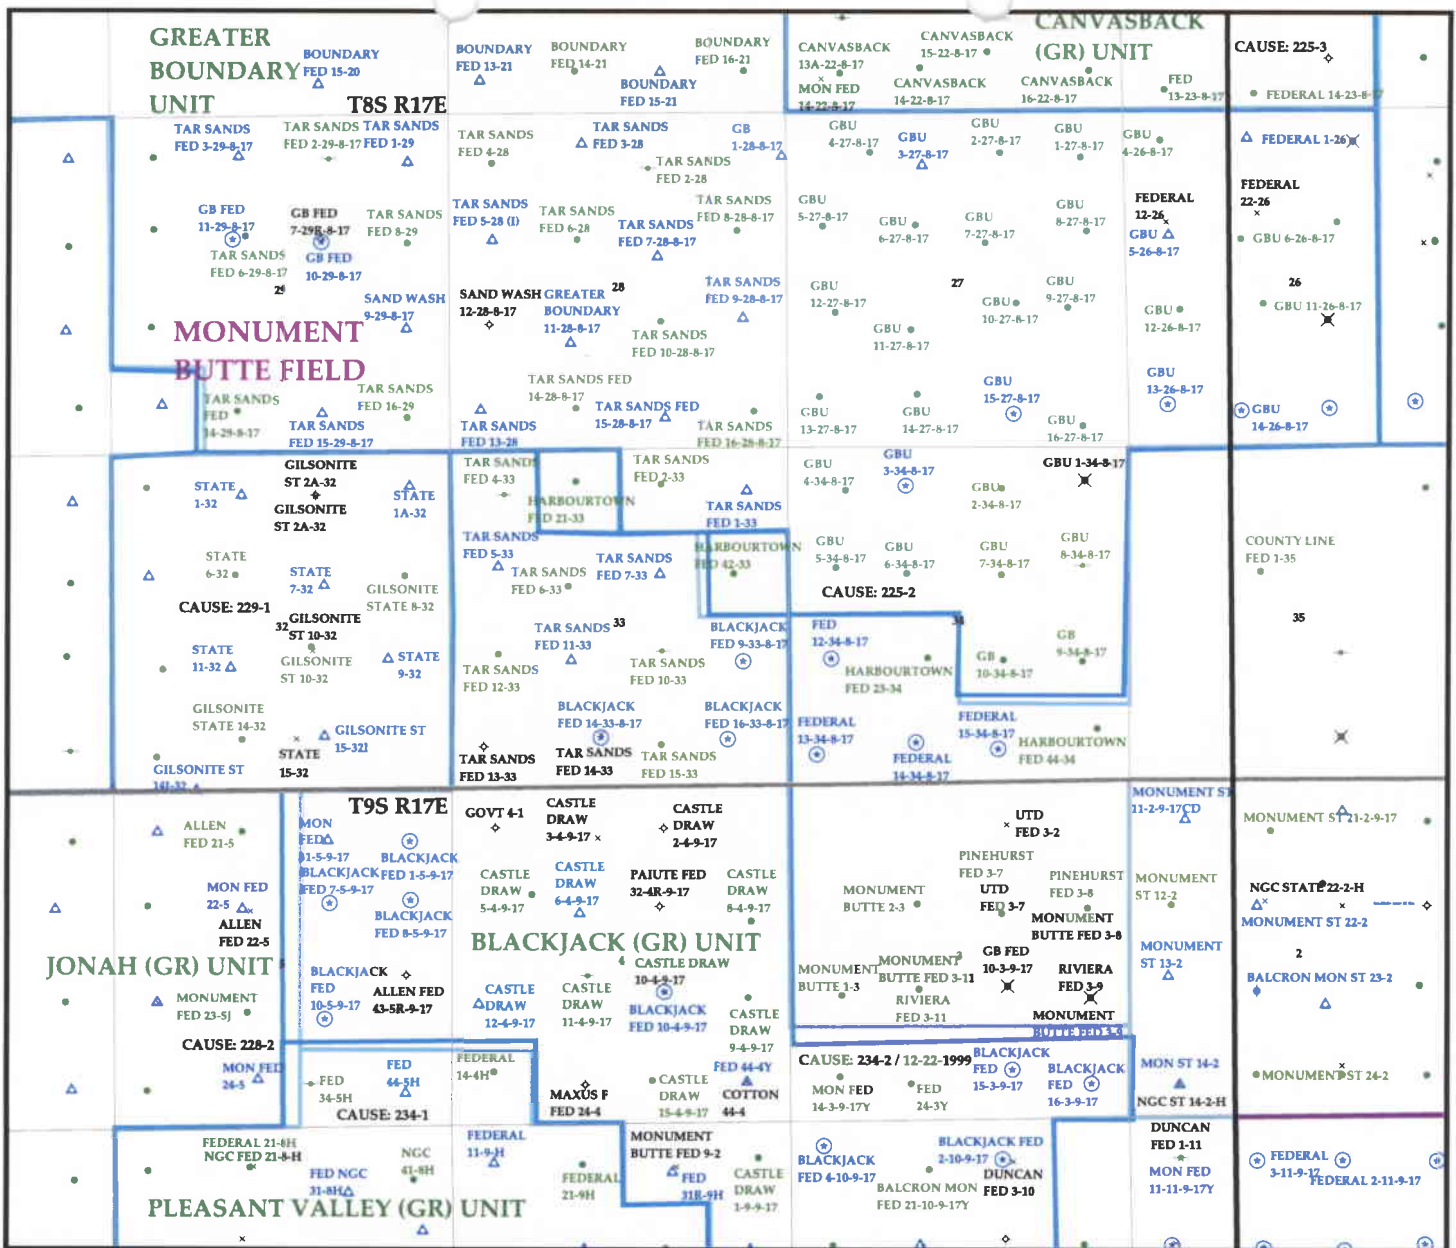


OPERATOR: INLAND PRODUCTION CO (N5160)

SEC. 34 T.8S R.17E

FIELD: MONUMENT BUTTE (105)

COUNTY: DUCHESNE

SPACING: R649-3-2 / GENERAL SITING



Utah Oil Gas and Mining

Wells

- ✱ GAS INJECTION
- ✱ GAS STORAGE
- ✱ LOCATION ABANDONED
- ⊙ NEW LOCATION
- ✱ PLUGGED & ABANDONED
- ✱ PRODUCING GAS
- PRODUCING OIL
- ✱ SHUT-IN GAS
- ✱ SHUT-IN OIL
- ✱ TEMP. ABANDONED
- ✱ TEST WELL
- △ WATER INJECTION
- ◇ WATER SUPPLY
- ◇ WATER DISPOSAL

Units.shp

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Fields.shp

- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED



PREPARED BY: DIANA WHITNEY
DATE: 12-AUG-2004



State of Utah

Department of
Natural ResourcesROBERT L. MORGAN
*Executive Director*Division of
Oil, Gas & MiningLOWELL P. BRAXTON
*Division Director*OLENE S. WALKER
*Governor*GAYLE F. McKEACHNIE
Lieutenant Governor

August 17, 2004

Inland Production Company
Rt. #3, Box 3630
Myton, UT 84052Re: Federal 15-34-8-17 Well, 473' FSL, 2043' FEL, SW SE, Sec. 34, T. 8 South,
R. 17 East, Duchesne County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-013-32628.

Sincerely,

For John R. Baza
Associate Directorpab
Enclosurescc: Duchesne County Assessor
Bureau of Land Management, Vernal District Office

Operator: Inland Production Company
Well Name & Number Federal 15-34-8-17
API Number: 43-013-32628
Lease: UTU-79017

Location: SW SE Sec. 34 T. 8 South R. 17 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155
<http://www.blm.gov>



IN REPLY REFER TO:
3106
(UT-924)

September 16, 2004

Memorandum

To: Vernal Field Office

From: Acting Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the name change recognized by the Utah State Office. We have updated our records to reflect the merger from Inland Production Company into Newfield Production Company on September 2, 2004.

Michael Coulthard
Acting Chief, Branch of
Fluid Minerals

Enclosure

1. State of Texas Certificate of Registration

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114
Teresa Thompson
Joe Incardine
Connie Seare

UTSL-	15855	61052	73088	76561	
071572A	16535	62848	73089	76787	
065914	16539	63073B	73520A	76808	
	16544	63073D	74108	76813	
	17036	63073E	74805	76954	63073X
	17424	63073O	74806	76956	63098A
	18048	64917	74807	77233	68528A
UTU-	18399	64379	74808	77234	72086A
	19267	64380	74389	77235	72613A
02458	26026A	64381	74390	77337	73520X
03563	30096	64805	74391	77338	74477X
03563A	30103	64806	74392	77339	75023X
04493	31260	64917	74393	77357	76189X
05843	33992	65207	74398	77359	76331X
07978	34173	65210	74399	77365	76788X
09803	34346	65635	74400	77369	77098X
017439B	36442	65967	74404	77370	77107X
017985	36846	65969	74405	77546	77236X
017991	38411	65970	74406	77553	77376X
017992	38428	66184	74411	77554	78560X
018073	38429	66185	74805	78022	79485X
019222	38431	66191	74806	79013	79641X
020252	39713	67168	74826	79014	80207X
020252A	39714	67170	74827	79015	81307X
020254	40026	67208	74835	79016	
020255	40652	67549	74868	79017	
020309D	40894	67586	74869	79831	
022684A	41377	67845	74870	79832	
027345	44210	68105	74872	79833	
034217A	44426	68548	74970	79831	
035521	44430	68618	75036	79834	
035521A	45431	69060	75037	80450	
038797	47171	69061	75038	80915	
058149	49092	69744	75039	81000	
063597A	49430	70821	75075		
075174	49950	72103	75078		
096547	50376	72104	75089		
096550	50385	72105	75090		
	50376	72106	75234		
	50750	72107	75238		
10760	51081	72108	76239		
11385	52013	73086	76240		
13905	52018	73087	76241		
15392	58546	73807	76560		



Office of the Secretary of State

The undersigned, as Secretary of State of Texas, does hereby certify that the attached is a true and correct copy of each document on file in this office as described below:

Newfield Production Company
Filing Number: 41530400

Articles of Amendment

September 02, 2004

In testimony whereof, I have hereunto signed my name officially and caused to be impressed hereon the Seal of State at my office in Austin, Texas on September 10, 2004.



A handwritten signature in black ink, appearing to read "G. Connor".

Secretary of State

ARTICLES OF AMENDMENT
TO THE
ARTICLES OF INCORPORATION
OF
INLAND PRODUCTION COMPANY

FILED
In the Office of the
Secretary of State of Texas
SEP 02 2004
Corporations Section

Pursuant to the provisions of Article 4.04 of the Texas Business Corporation Act (the "TBCA"), the undersigned corporation adopts the following articles of amendment to the articles of incorporation:

ARTICLE 1 – Name

The name of the corporation is Inland Production Company.

ARTICLE 2 – Amended Name

The following amendment to the Articles of Incorporation was approved by the Board of Directors and adopted by the shareholders of the corporation on August 27, 2004.

The amendment alters or changes Article One of the Articles of Incorporation to change the name of the corporation so that, as amended, Article One shall read in its entirety as follows:

"ARTICLE ONE – The name of the corporation is Newfield Production Company."

ARTICLE 3 – Effective Date of Filing

This document will become effective upon filing.

The holder of all of the shares outstanding and entitled to vote on said amendment has signed a consent in writing pursuant to Article 9.10 of the TBCA, adopting said amendment, and any written notice required has been given.

IN WITNESS WHEREOF, the undersigned corporation has executed these Articles of Amendment as of the 1st day of September, 2004.

INLAND RESOURCES INC.

By: Susan G. Riggs
Susan G. Riggs, Treasurer

OPERATOR CHANGE WORKSHEET

006

Change of Operator (Well Sold)

Designation of Agent/Operator

ROUTING

1. GLH

2. CDW

3. FILE

X Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective:

9/1/2004

FROM: (Old Operator):

N5160-Inland Production Company

Route 3 Box 3630

Myton, UT 84052

Phone: 1-(435) 646-3721

TO: (New Operator):

N2695-Newfield Production Company

Route 3 Box 3630

Myton, UT 84052

Phone: 1-(435) 646-3721

CA No.

Unit:

WELL(S)

NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS	
FEDERAL 15-34-8-17	34	080S	170E	4301332628		Federal	OW	APD	K
FEDERAL 14-34-8-17	34	080S	170E	4301332629		Federal	OW	APD	K
FEDERAL 13-34-8-17	34	080S	170E	4301332630		Federal	OW	APD	K
FEDERAL 12-34-8-17	34	080S	170E	4301332631		Federal	OW	APD	K
FEDERAL 16-13-9-16	13	090S	160E	4301332647		Federal	OW	APD	K
FEDERAL 15-13-9-16	13	090S	160E	4301332648		Federal	OW	APD	K
FEDERAL 14-13-9-16	13	090S	160E	4301332649		Federal	OW	APD	K
FEDERAL 13-13-9-16	13	090S	160E	4301332650		Federal	OW	NEW	K
FEDERAL 12-13-9-16	13	090S	160E	4301332651		Federal	OW	APD	K
FEDERAL 11-13-9-16	13	090S	160E	4301332652		Federal	OW	APD	K
FEDERAL 10-13-9-16	13	090S	160E	4301332653		Federal	OW	APD	K
FEDERAL 9-13-9-16	13	090S	160E	4301332654		Federal	OW	APD	K
FEDERAL 8-13-9-16	13	090S	160E	4301332655		Federal	OW	APD	K
FEDERAL 7-13-9-16	13	090S	160E	4301332656		Federal	OW	APD	K
FEDERAL 11-20-9-16	20	090S	160E	4301332598		Federal	OW	APD	K
FEDERAL 1-22-9-16	22	090S	160E	4301332612		Federal	OW	NEW	K
FEDERAL 9-10-9-17	10	090S	170E	4301332502	14325	Federal	OW	DRL	K
FEDERAL 13-11-9-17	11	090S	170E	4301332510	14273	Federal	OW	P	K
FEDERAL 12-11-9-17	11	090S	170E	4301332544		Federal	OW	APD	K
FEDERAL 1-15-9-17	15	090S	170E	4301332596		Federal	OW	APD	K

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 9/15/20042. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 9/15/20043. The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 2/23/20054. Is the new operator registered in the State of Utah: YES Business Number: 755627-01435. If **NO**, the operator was contacted on:

6a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
6b. Inspections of LA PA state/fee well sites complete on: waived

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM BIA

8. **Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: n/a

9. **Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: na/

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: 2/23/2005

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 2/28/2005
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 2/28/2005
3. Bond information entered in RBDMS on: 2/28/2005
4. Fee/State wells attached to bond in RBDMS on: 2/28/2005
5. Injection Projects to new operator in RBDMS on: 2/28/2005
6. Receipt of Acceptance of Drilling Procedures for APD/New on: waived

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: UT 0056

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: 61BSBDH2912

FEE & STATE WELL(S) BOND VERIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number 61BSBDH2919
2. The **FORMER** operator has requested a release of liability from their bond on: n/a*
The Division sent response by letter on: n/a

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: n/a

COMMENTS:

*Bond rider changed operator name from Inland Production Company to Newfield Production Company - received 2/23/05

AUG - 6 2004

Form 3160-3
(September 2001)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0136
Expires January 31, 2004

005

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-79017
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name N/A
2. Name of Operator Inland Production Company		7. If Unit or CA Agreement, Name and No. N/A
3a. Address Route #3 Box 3630, Myton UT 84052	3b. Phone No. (include area code) (435) 646-3721	8. Lease Name and Well No. Federal 15-34-8-17
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SW/SE 473' FSL 2043' FEL At proposed prod. zone		9. API Well No. 43, 013, 32628
14. Distance in miles and direction from nearest town or post office* Approximatley 18.0 miles southeast of Myton, Utah		10. Field and Pool, or Exploratory Monument Butte
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) Approx. 473' f/lse, NA' f/unit	16. No. of Acres in lease 160.00	11. Sec., T., R., M., or Blk. and Survey or Area SW/SE Sec. 34, T8S R17E
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1445'	19. Proposed Depth 6500'	12. County or Parish Duchesne
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5052' GL	22. Approximate date work will start* 1st Quarter 2005	13. State UT
20. BLM/BIA Bond No. on file UTU0056		23. Estimated duration Approximately seven (7) days from spud to rig release.
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature <i>Mandie Crozier</i>	Name (Printed/Typed) Mandie Crozier	Date 8/5/04
Title Regulatory Specialist		
Approved by (Signature) <i>Robert R. Leavins</i>	Name (Printed/Typed)	Date 03/15/2005
Title Assistant Field Manager Mineral Resources	Office	

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

RECEIVED

APR 01 2005

DIV. OF OIL, GAS & MINING

UDOGM

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Inland Production Company
Well Name & Number: Federal 15-34-8-17
API Number: 43-013-32628
Lease Number: U-79017
Location: SWSE Sec. 34 T.8S R. 17E
Agreement: N/A

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

**Please submit to this office, in LAS format, an electronic copy of all logs run on this well
This submission will replace the requirement for submittal of paper logs to the BLM.**

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Ed Forsman (435) 828-7874
Petroleum Engineer

Kirk Fleetwood (435) 828-7875
Petroleum Engineer

BLM FAX Machine (435) 781-4410

CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Inland Production Company

API Number: 43-013-32628

Well Name & Number: Federal 15-34-8-17

Lease Number: U-79017

Location: SWSE Sec. 34 T. 8 S. R. 17 E.

Surface Ownership: BLM

Date NOS Received: None

Date APD Received: 8-6-04

-A certified paleontologist shall be present to monitor the construction of the proposed access road and well location.

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Inland Production Company
Well Name & Number: Federal 15-34-8-17
API Number: 43-013-32628
Lease Number: U-79017
Location: SWSE Sec. 34 T.8S R. 17E
Agreement: N/A

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

**Please submit to this office, in LAS format, an electronic copy of all logs run on this well
This submission will replace the requirement for submittal of paper logs to the BLM.**

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Ed Forsman (435) 828-7874
Petroleum Engineer

Kirk Fleetwood (435) 828-7875
Petroleum Engineer

BLM FAX Machine (435) 781-4410

CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Inland Production Company

API Number: 43-013-32628

Well Name & Number: Federal 15-34-8-17

Lease Number: U-79017

Location: SWSE Sec. 34 T. 8 S. R. 17 E.

Surface Ownership: BLM

Date NOS Received: None

Date APD Received: 8-6-04

-A certified paleontologist shall be present to monitor the construction of the proposed access road and well location.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

007

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Newfield Production Company

3a. Address Route 3 Box 3630

Myton, UT 84052

3b. Phone No. (include area code)

435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

473 FSL 2043 FEL

SW/SE Section 34 T8S R17E

5. Lease Serial No.

UTU79017

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or No.

GREATER BOUNDARY II

8. Well Name and No.

GRTR BNDRY FED 15-34-8-17

9. API Well No.

4301332628

10. Field and Pool, or Exploratory Area

Monument Butte

11. County or Parish, State

Duchesne, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Change of Name _____
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Effective April 27, 2005 Newfield Production Company is changing the name of the Federal 15-34-8-17 to the Greater Boundary Federal 15-34-8-17.

RECEIVED

APR 29 2005

DIV. OF OIL, GAS & MINING

I hereby certify that the foregoing is true and correct

Name (Printed/ Typed)
Mandie Crozier

Signature

Title

Regulatory Specialist

Date

04/28/2005

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: NEWFIELD PRODUCTION COMPANY

Well Name: GREATER BOUNDARY FED 15-34-8-17

Api No: 43-013-32628 Lease Type: FEDERAL

Section 34 Township 08S Range 17E County DUCHESNE

Drilling Contractor NDSI RIG # NS#1

SPUDDED:

Date 06/03/05

Time 8:00 AM

How DRY

Drilling will Commence: _____

Reported by FLOYD MITCHELL

Telephone # 1-435-823-3610

Date 06/03/2005 Signed CHD

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING
ENTITY ACTION FORM - FORM 6

OPERATOR: NEWFIELD PRODUCTION COMPANY
ADDRESS: RT. 3 BOX 3630
MYTON, UT 84052

OPERATOR ACCT. NO. A2896

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
B	99999	11492	43-013-32683	Jonah Federal 9-15-9-16	NE/SE	15	9S	16E	Duchesne	6/01/2005	6/9/05
WELL 1 COMMENTS: <i>GRPV</i>											
A	99999	14754	43-013-32460	Ashley Federal 8-13-9-15	SE/NE	13	9S	15E	Duchesne	6/02/2005	6/9/05
WELL 2 COMMENTS: <i>GRPV</i>											
B	99999	12391	43-013-32628	Greater Boundary Fed 15-34-8-17	SW/SE	34	8S	17E	Duchesne	6/03/2005	6/9/05
WELL 3 COMMENTS: <i>GRPV</i>											
A	99999	14755	43-047-35452	Federal 13-7-9-18	SW/SW	7	9S	18E	Uintah	6/06/2005	6/9/05
WELL 4 COMMENTS: <i>GRPV</i>											
WELL 5 COMMENTS:											

ACTION CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

Kebbie S. Jones
Signature
Kebbie S. Jones
Production Clerk
June 6, 2005
Date

RECEIVED

JUN 06 2005

DIV. OF OIL, GAS & MINING

06/06/2005 15:07

K 4356463031 K

K

INLAND

K

PAGE 02

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. UTU79017
2. Name of Operator Newfield Production Company		6. If Indian, Allottee or Tribe Name.
3a. Address Route 3 Box 3630 Myton, UT 84052	3b. Phone No. (include area code) 435.646.3721	7. If Unit or CA/Agreement, Name and/or No. GREATER BOUNDARY II
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 473 FSL 2043 FEL SW/SE Section 34 T8S R17E		8. Well Name and No. GRTR BNDRY FED 15-34-8-17
		9. API Well No. 4301332628
		10. Field and Pool, or Exploratory Area Monument Butte
		11. County or Parish, State Duchesne, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Notice
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 6/3/2005 MIRU NDSI NS # 1. Spud well @ 8:00 AM. Drill 310' of 12 1/4" hole with air mist. TIH W/ 7 Jt's 8 5/8" J-55 24 # csgn. Set @ 314.51' KB On 6/7/2005 cement with 160 sks of class "G" w/ 3% CaCL2 + 1/4# sk Cello- Flake Mixed @ 15.8 ppg > 1.17 cf/ sk yeild. Returned 5 bbls cement to pit. WOC.

I hereby certify that the foregoing is true and correct Name (Printed/ Typed) Floyd Mitchell	Title Drilling Supervisor
Signature <i>Floyd Mitchell</i>	Date 06/07/2005

THIS SPACE FOR FEDERAL OR STATE OFFICE USE		
Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

JUN 13 2005

NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

8 5/8" CASING SET AT 314.51

LAST CASING 8 5/8" SET AT 314.51'
 DATUM 12' KB
 DATUM TO CUT OFF CASING
 DATUM TO BRADENHEAD FLANGE
 TD DRILLER 310' LOGGER
 HOLE SIZE 12 1/4

OPERATOR Newfield Production Company
 WELL GBF 15-34-8-17
 FIELD/PROSPECT Monument Butte
 CONTRACTOR & RIG # NDSI NS #1

LOG OF CASING STRING:

PIECES	OD	ITEM - MAKE - DESCRIPTION	WT / FT	GRD	THREAD	CONDT	LENGTH
		Shoe Joint 43.55'					
		WHI - 92 csg head			8rd	A	0.95
7	8 5/8"	Maverick ST&C csg	24#	J-55	8rd	A	302.66
		GUIDE shoe			8rd	A	0.9
							304.51
CASING INVENTORY BAL.		FEET	JTS	TOTAL LENGTH OF STRING			
TOTAL LENGTH OF STRING		304.51	7	LESS CUT OFF PIECE			
LESS NON CSG. ITEMS		1.85		PLUS DATUM TO T/CUT OFF CSG			
PLUS FULL JTS. LEFT OUT		0		CASING SET DEPTH			
TOTAL		302.66	7				
TOTAL CSG. DEL. (W/O THRDS)		302.66	7				
TIMING		1ST STAGE					
BEGIN RUN CSG.		Spud 6/3/2005	8:00 AM	GOOD CIRC THRU JOB Yes			
CSG. IN HOLE		6/4/2005	12:00 PM	Bbls CMT CIRC TO SURFACE 5			
BEGIN CIRC		6/7/2005	7:57 AM	RECIPROCATED PIPE FOR N/A			
BEGIN PUMP CMT		6/7/2005	8:06 AM				
BEGIN DSPL. CMT		6/7/2005	8:17 AM	BUMPED PLUG TO 655 PSI			
PLUG DOWN		6/7/2005	8:25 AM				

} COMPARE

CEMENT USED

CEMENT COMPANY- B. J.

STAGE

SX

CEMENT TYPE & ADDITIVES

1

160

Class "G" w/ 2% CaCL2 + 1/4#/sk Cello-Flake mixed @ 15.8 ppg 1.17 cf/sk yield

CENTRALIZER & SCRATCHER PLACEMENT

SHOW MAKE & SPACING

Centralizers - Middle first, top second & third for 3

COMPANY REPRESENTATIVE Floyd Mitchell

DATE 6/7/2005

RECEIVED

JUN 13 2005

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Newfield Production Company

3a. Address Route 3 Box 3630

Myton, UT 84052

3b. Phone No. (include area code)

435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

473 FSL 2043 FEL

SW/SE Section 34 T8S R17E

5. Lease Serial No.

UTU79017

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or No.

GREATER BOUNDARY II

8. Well Name and No.

GRTR BNDRY FED 15-34-8-17

9. API Well No.

4301332628

10. Field and Pool, or Exploratory Area

Monument Butte

11. County or Parish, State

Duchesne, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Weekly Status Report
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 8/26/2005 MIRU Union Rig #14. Set all equipment. Pressure test Kelly, TIW, Choke manifold, & Bop's to 2,000 psi. Test 8.625 csgn to 1,500 psi. Vernal BLM field, & Roosevelt DOGM office was notified of test. PU BHA and tag cement @ 259'. Drill out cement & shoe. Drill a 7.875 hole with fresh water to a depth of 6076'. Lay down drill string & BHA. Open hole log w/ Dig/SP/GR log's TD to surface. PU & TIH with Guide shoe, shoe jt, float collar, 137 jt's of 5.5 J-55, 15.5# csgn. Set @ 6066.08'/KB. Cement with 350 sks cement mixed @ 11.0 ppg & 3.43 yld. The 450 sks cement mixed @ 14.4 ppg & 1.24 yld. With 1 bbl cement returned to pit. Nipple down Bop's. Drop slips @ 100,000 #'s tension. Release rig 10:00 am on 9/2/2005.

I hereby certify that the foregoing is true and correct

Name (Printed/ Typed)
Floyd Mitchell

Title

Drilling Supervisor

Signature

Floyd Mitchell

Date

09/02/2005

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

RECEIVED

SEP 08 2005

DIV. OF OIL, GAS & MINING

NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

5 1/2" CASING SET AT 6066.08

Fit cllr @ 6022'

LAST CASING 8 5/8" SET AT 314'

OPERATOR Newfield Production Company

DATUM 12' KB

WELL GBU 15-34-8-17

DATUM TO CUT OFF CASING 12'

FIELD/PROSPECT Monument Butte

DATUM TO BRADENHEAD FLANGE

CONTRACTOR & RIG # Union Rig #14

TD DRILLER 6076' Loggers TD 6056'

HOLE SIZE 7 7/8"

LOG OF CASING STRING:

PIECES	OD	ITEM - MAKE - DESCRIPTION	WT / FT	GRD	THREAD	CONDT	LENGTH
		Landing Jt					14
	SHJT	6.30' @ 3950'					
137	5 1/2"	ETC LT & C casing	15.5#	J-55	8rd	A	6008.55
		Float collar					0.6
1	5 1/2"	ETC LT&C csg	15.5#	J-55	8rd	A	44.28
		GUIDE shoe			8rd	A	0.65
CASING INVENTORY BAL.		FEET	JTS	TOTAL LENGTH OF STRING			6068.08
TOTAL LENGTH OF STRING		6068.08	138	LESS CUT OFF PIECE			14
LESS NON CSG. ITEMS		15.25		PLUS DATUM TO T/CUT OFF CSG			12
PLUS FULL JTS. LEFT OUT		221.36	5	CASING SET DEPTH			6066.08
TOTAL		6274.19	143	} COMPARE			
TOTAL CSG. DEL. (W/O THRDS)		6274.19	143				
TIMING		1ST STAGE	2nd STAGE				
BEGIN RUN CSG.		9/2/2005	12:00 AM	GOOD CIRC THRU JOB <u>Yes</u>			
CSG. IN HOLE		9/2/2005	3:30 AM	Bbls CMT CIRC TO SURFACE <u>1</u>			
BEGIN CIRC		9/2/2005	3:30 AM	RECIPROCATED PIPE FOR <u>THRUSTROKE</u>			
BEGIN PUMP CMT		9/2/2005	6:26 AM	DID BACK PRES. VALVE HOLD ? <u>Yes</u>			
BEGIN DSPL. CMT		9/2/2005	7:18 AM	BUMPED PLUG TO <u>2075</u> PSI			
PLUG DOWN		9/2/2005	7:44 AM				

CEMENT USED		CEMENT COMPANY- B. J.
STAGE	# SX	CEMENT TYPE & ADDITIVES
1	350	Premlite II w/ 10% gel + 3 % KCL, 3#s /sk CSE + 2# sk/kolseal + 1/4#s/sk Cello Flake
		mixed @ 11.0 ppg W / 3.43 cf/sk yield
2	450	50/50 poz W/ 2% Gel + 3% KCL, .5%EC1, 1/4# sk C.F. 2% gel. 3% SM mixed @ 14.4 ppg W/ 1.24 YLD
CENTRALIZER & SCRATCHER PLACEMENT		SHOW MAKE & SPACING
Centralizers - Middle first, top second & third. Then every third collar for a total of 20.		

COMPANY REPRESENTATIVE Floyd Mitchell

DATE 8/29/2005

RECEIVED

SEP 08 2005

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Newfield Production Company

3a. Address Route 3 Box 3630

Myton, UT 84052

3b. Phone No. (include area code)

435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

473 FSL 2043 FEL

SW/SE Section 34 T8S R17E

5. Lease Serial No.

UTU79017

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or No.

GREATER BOUNDARY II

8. Well Name and No.

GRTR BNDRY FED 15-34-8-17

9. API Well No.

4301332628

10. Field and Pool, or Exploratory Area
Monument Butte

11. County or Parish, State

Duchesne, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input checked="" type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Formation water is produced to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

I hereby certify that the foregoing is true and correct

Name (Printed/Typed)
Mandie Crozier

Title

Regulatory Specialist

Signature

Date

10/04/2005

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED

OCT 06 2005

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Newfield Production Company

3a. Address Route 3 Box 3630

Myton, UT 84052

3b. Phone No. (include area code)

435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

473 FSL 2043 FEL

SW/SE Section 34 T8S R17E

5. Lease Serial No.

UTU79017

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or No.

GREATER BOUNDARY II

8. Well Name and No.

GRTR BNDRY FED 15-34-8-17

9. API Well No.

4301332628

10. Field and Pool, or Exploratory Area
Monument Butte

11. County or Parish, State

Duchesne, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Variance _____
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Newfield Production Company is requesting a variance from Onshore Order 43 CFR Part 3160 Section 4 requiring production tanks to be equipped with Enardo or equivalent vent line valves. Newfield operates wells that produce from the Green River formation, which are relatively low gas producers (20 mcfpd). The majority of the wells are equipped with a three phase separator to maximize gas separation and sales.

Newfield is requesting a variance for safety reasons. Crude oil production tanks equipped with back pressure devices will emit a surge of gas when the thief hatches are open. While gauging tanks, lease operators will be subject to breathing toxic gases as well as risk a fire hazard, under optimum conditions

I hereby certify that the foregoing is true and correct

Name (Printed/Typed)
Mandie Crozier

Title

Regulatory Specialist

Signature

Date

10/04/2005

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Utah Division of
Oil, Gas and Mining

Date

Federal Approval of This
Action Is Necessary

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

By:

Date

10/11/05

RECEIVED

OCT 06 2005

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Newfield Production Company

3a. Address Route 3 Box 3630

Myton, UT 84052

3b. Phone No. (include area code)

435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

473 FSL 2043 FEL

SW/SE Section 34 T8S R17E

5. Lease Serial No.

UTU79017

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or No.

GREATER BOUNDARY II

8. Well Name and No.

GRTR BNDRY FED 15-34-8-17

9. API Well No.

4301332628

10. Field and Pool, or Exploratory Area
Monument Butte

11. County or Parish, State

Duchesne, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Weekly Status Report _____
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomple horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomple in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Status report for time period 09/13/05 - 10/03/05

Subject well had completion procedures initiated in the Green River formation on 09-13-05 without the use of a service rig over the well. A cement bond log was run and a total of four Green River intervals were perforated and hydraulically fracture treated with 20/40 mesh sand. Perforated intervals are as follows: Stage #1 (5616'-5629'); Stage #2 (5038'-5042'), (4962'-4966'), (4953'-4957'); Stage #3 (4345'-4351'); Stage #4 (4200'-4206'). All perforations, were 4 JSPF. Composite flow-through frac plugs were used between stages. Fracs were flowed back through chokes. A service rig was moved over the well on 10-01-2005. Bridge plugs were drilled out and well was cleaned to 6020'. Zones were swab tested for sand cleanup. A 1 1/2" bore rod pump was run in well on sucker rods. Well was placed on production via rod pump on 10-03-2005.

I hereby certify that the foregoing is true and correct

Name (Printed/Typed)
Lana Nebeker

Signature

Title

Production Clerk

Date

10/12/2005

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

RECEIVED

OCT 13 2005

DIV. OF OIL, GAS & MINING

SUBMIT IN DUPLICATE*
(See other instructions on reverse side)

FORM APPROVED
OMB NO. 1004-0137
Expires: February 28, 1995

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

1a. TYPE OF WORK

OIL WELL ☒ GAS WELL ☐ DRY ☐ Other _____

1b. TYPE OF WELL

NEW WELL ☒ WORK OVER ☐ DEEPEN ☐ PLUG BACK ☐ DIFF RESVR. ☐ Other _____

2. NAME OF OPERATOR

Newfield Exploration Company

3. ADDRESS AND TELEPHONE NO.

1401 17th St. Suite 1000 Denver, CO 80202

4. LOCATION OF WELL (Report locations clearly and in accordance with any State requirements.)*

At Surface 473' FSL & 2043' FEL (SW/SE) Sec. 34, Twp 8S, Rng 17E

At top prod. Interval reported below

At total depth

14. API NO. 43-013-32628 DATE ISSUED 8/17/04

5. LEASE DESIGNATION AND SERIAL NO.

UTU-79017

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

NA

7. UNIT AGREEMENT NAME

Greater Boundary II Unit

8. FARM OR LEASE NAME, WELL NO.

Greater Boundary Federal 15-34-8-17

9. WELL NO.

43-013-32628

10. FIELD AND POOL OR WILDCAT

Monument Butte

11. SEC., T., R., M. OR BLOCK AND SURVEY OR AREA

Sec. 34, T8S, R17E

12. COUNTY OR PARISH

Duchesne

13. STATE

UT

15. DATE SPUDDED

6/3/05

16. DATE T.D. REACHED

9/1/05

17. DATE COMPL. (Ready to prod.)

10/3/05

18. ELEVATIONS (DF, RKB, RT, GR, ETC.)*

5052' GL

19. ELEV. CASINGHEAD

5064' KB

20. TOTAL DEPTH MD & TVD

6076'

21. PLUG BACK T.D., MD & TVD

6020'

22. IF MULTIPLE COMPLET. HOW MANY*

----->

23. INTERVALS DRILLED BY

----->

ROTARY TOOLS

X

CABLE TOOLS

24. PRODUCING INTERVAL(S), OF THIS COMPLETION--TOP, BOTTOM, NAME (MD AND TVD)*

Green River 4200'-5629'

25. WAS DIRECTIONAL SURVEY MADE

No

26. TYPE ELECTRIC AND OTHER LOGS RUN

Dual Induction Guard, SP, Compensated Density, Compensated Neutron, GR, Caliper, Cement Bond Log

27. WAS WELL CORED

No

23. CASING RECORD (Report all strings set in well)

CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8-5/8" - J-55	24#	315'	12-1/4"	To surface with 160 sx Class "G" cmt	
5-1/2" - J-55	15.5#	6066'	7-7/8"	350 sx Premlite II and 450 sx 50/50 Poz	

29. LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-7/8"	EOT @ 5704'	TA @ 5606'

31. PERFORATION RECORD (Interval, size and number)

INTERVAL	SIZE	SPF/NUMBER	DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
(CP1) 5616'-5629'	.43"	4/52	5616'-5629'	Frac w/ 85,434# 20/40 sand in 642 bbls fluid
B.5) 4953'-4957', 4962'-4966', 5038'-5042'	.43"	4/48	4953'-5042'	Frac w/ 75,177# 20/40 sand in 572 bbls fluid
(GB6) 4345'-4351'	.43"	4/24	4345'-4351'	Frac w/ 19,307# 20/40 sand in 258 bbls fluid
(GB2) 4200'-4206'	.43"	4/24	4200'-4206'	Frac w/ 24,346# 20/40 sand in 258 bbls fluid

33. PRODUCTION

DATE FIRST PRODUCTION 10/3/05		PRODUCTION METHOD (Flowing, gas lift, pumping--size and type of pump) 2-1/2" x 1-1/2" x 14' RHAC SM Plunger Pump					WELL STATUS (Producing or shut-in) PRODUCING	
DATE OF TEST 30 day ave	HOURS TESTED	CHOKO SIZE	PROD'N. FOR TEST PERIOD ----->	OIL--BBL. 66	GAS--MCF 6	WATER--BBL. 49		GAS-OIL RATIO 91
FLOW, TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE ----->	OIL--BBL.	GAS--MCF	WATER--BBL.		OIL GRAVITY-API (CORR.)	

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)

Sold & Used for Fuel

TEST WITNESSES

35. LIST OF ATTACHMENTS

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED

Mandie Crozier
Mandie Crozier

TITLE

Regulatory Specialist

DIV. OF OIL, GAS & MINING
NOV 09 2005

KR

*(See Instructions and Spaces for Additional Data on Reverse Side)

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem, tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries);				38. GEOLOGIC MARKERS		
FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	TOP	
					MEAS. DEPTH	TRUE VERT. DEPTH
			Well Name Greater Boundary Federal 15-34-8-17	Garden Gulch Mkr	3784'	
				Garden Gulch 1	3967'	
				Garden Gulch 2	4089'	
				Point 3 Mkr	4354'	
				X Mkr	4586'	
				Y-Mkr	4624'	
				Douglas Creek Mkr	4758'	
				BiCarbonate Mkr	5006'	
				B Limestone Mkr	5166'	
				Castle Peak	5566'	
				Basal Carbonate	5988'	
				Total Depth (LOGGERS	6076'	



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

REGION 8
1595 WYNKOOP STREET
DENVER, CO 80202-1129
<http://www.epa.gov/region8>

MAY 10 2007

Ref: 8P-W-GW

CERTIFIED MAIL
RETURN RECEIPT REQUESTED

David Gerbig
Newfield Production Company
1401 Seventeenth Street
Suite 1000
Denver, CO 80202

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

43.013.32628

85 17E 34

Re: Underground Injection Control Program
Final Permit: Greater Boundary Federal 15-34-8-17
Duchesne County, Utah
EPA Permit No. UT21067-07196

Dear Mr. Gerbig:

Enclosed is your copy of the FINAL Underground Injection Control (UIC) Permit for the proposed Greater Boundary Federal 15-34-8-17 injection well. A Statement of Basis, which discusses development of the conditions and requirements of the Permit, also is included.

The Public Comment period ended on MAY - 2 2007. There were no comments on the Draft Permit received during the Public Notice period, and therefore the Final Permit becomes effective on the date of issuance. All conditions set forth herein refer to Title 40 Parts 124, 144, 146, and 147 of the Code of Federal Regulations (CFR) and are regulations that are in effect on the date that this Permit becomes effective.

Please note that under the terms of the Final Permit, you are authorized only to construct the proposed injection well, and must fulfill the "Prior to Commencing Injection" requirements of the Permit, Part II Section C Subpart 1 and obtain written Authorization to Inject prior to commencing injection. It is your responsibility to be familiar with and to comply with all provisions of the Final Permit.

The Permit and the authorization to inject are issued for the operating life of the well unless terminated (Part III, Section B). The EPA will review this Permit at least every five (5) years to determine whether action under 40 CFR § 144.36(a) is warranted.

RECEIVED


MAY 15 2007



DIV. OF OIL, GAS & MINING
Printed on Recycled Paper

If you have any questions on the enclosed Final Permit or Statement of Basis, please call Emmett Schmitz of my staff at (303) 312-6174, or toll-free at (800) 227-8917, ext. 312-6174.

Sincerely,



for Stephen S. Tuber
Assistant Regional Administrator
Office of Partnerships and Regulatory Assistance

enclosure: Final UIC Permit
Statement of Basis
Form 7520-7 Application to Transfer Permit
Form 7520-11 Monitoring Report
Form 7520-12 Well Rework Record
Form 7520-13 Plugging Report

cc: Letter only:

Maxine Natchees
Chairperson
Uintah & Ouray Business Committee
Ute Indian Tribe

Chester Mills
Superintendent
U.S. Bureau of Indian Affairs
Uintah & Ouray Indian Agency

Irene Couch
Councilwoman
Uintah & Ouray Business Committee
Ute Indian Tribe

Smiley Arrowchis
Councilman
Uintah & Ouray Business Committee
Ute Indian Tribe



Ronald Groves
Councilman
Uintah & Ouray Business Committee
Ute Indian Tribe

Richard Jenks, Jr.
Councilman
Uintah & Ouray Business Committee
Ute Indian Tribe

Francis Poowegup
Councilman
Uintah & Ouray Business Committee
Ute Indian Tribe

all enclosures:

Michael Guinn
District Manager
Newfield Production Company
Myton, Utah

Gilbert Hunt
Assistant Director
State of Utah - Natural Resources

Fluid Minerals Engineering Office
U.S. Bureau of Land Management
Vernal, Utah

Shaun Chapoose
Director
Land Use Dept.
Ute Indian Tribe

Lynn Becker
Director
Energy & Minerals Dept.
Ute Indian Tribe





**UNDERGROUND INJECTION CONTROL PROGRAM
PERMIT**

PREPARED: May 2007

Permit No. UT21067-07196

Class II Enhanced Oil Recovery Injection Well

**Greater Boundary Federal 15-34-8-17
Duchesne County, UT**

Issued To

Newfield Production Company

1401 Seventeenth Street

Suite 1000

Denver, CO 80202

RECEIVED

MAY 15 2007

Permit

DIV. OF OIL & GAS

Part I. AUTHORIZATION TO CONSTRUCT AND OPERATE

Under the authority of the Safe Drinking Water Act and Underground Injection Control (UIC) Program regulations of the U. S. Environmental Protection Agency (EPA) codified at Title 40 of the Code of Federal Regulations (40 CFR) Parts 2, 124, 144, 146, and 147, and according to the terms of this Permit,

Newfield Production Company
1401 Seventeenth Street
Suite 1000
Denver, CO 80202

is authorized to construct and to operate the following Class II injection well or wells:

Greater Boundary Federal 15-34-8-17
473' FSL & 2043' FEL, SWSE S34, T8S, R17E
Duchesne County, UT


EPA regulates the injection of fluids into injection wells so that injection does not endanger underground sources of drinking water (USDWs). EPA UIC Permit conditions are based on authorities set forth at 40 CFR Parts 144 and 146, and address potential impacts to USDWs.

Under 40 CFR Part 144, Subpart D, certain conditions apply to all UIC Permits and may be incorporated either expressly or by reference. General permit conditions for which the content is mandatory and not subject to site-specific differences are not discussed in this document. Issuance of this Permit does not convey any property rights of any sort or any exclusive privilege, nor does it authorize injury to persons or property or invasion of other private rights, or any infringement of other Federal, State or local laws or regulations. (40 CFR §144.35) An EPA UIC Permit may be issued for the operating life of the injection well or project unless terminated for reasonable cause under 40 CFR §§144.39, 144.40 and 144.41, and may be reviewed at least once every five (5) years to determine if action is required under 40 CFR §144.36(a).

This Permit is issued for the life of the well(s) unless modified, revoked and reissued, or terminated under 40 CFR 144.39 or 144.40. This EPA Permit may be adopted, modified, revoked and reissued, or terminated if primary enforcement authority for a UIC Program is delegated to an Indian Tribe or State. Upon the effective date of delegation, reports, notifications, questions and other correspondence should be directed to the Indian Tribe or State Director.

Issue Date: MAY - 9 2007

Effective Date MAY - 9 2007



for Stephen S. Tuber
Assistant Regional Administrator*
Office of Partnerships and Regulatory Assistance

*NOTE: The person holding this title is referred to as the "Director" throughout this Permit.

PART II. SPECIFIC PERMIT CONDITIONS

Section A. WELL CONSTRUCTION REQUIREMENTS

These requirements represent the approved minimum construction standards for well casing and cement, injection tubing, and packer.

Details of the approved well construction plan are incorporated into this Permit as APPENDIX A. Changes to the approved plan that may occur during construction must be approved by the Director prior to being physically incorporated.

1. Casing and Cement.

The well or wells shall be cased and cemented to prevent the movement of fluids into or between underground sources of drinking water. The well casing and cement shall be designed for the life expectancy of the well and of the grade and size shown in APPENDIX A. Remedial cementing may be required if shown to be inadequate by cement bond log or other attempted demonstration of Part II (External) mechanical integrity.

2. Injection Tubing and Packer.

Injection tubing is required, and shall be run and set with a packer at or below the depth indicated in APPENDIX A. The packer setting depth may be changed provided it remains below the depth indicated in APPENDIX A and the Permittee provides notice and obtains the Director's approval for the change.

3. Sampling and Monitoring Devices.

The Permittee shall install and maintain in good operating condition:

- (a) a "tap" at a conveniently accessible location on the injection flow line between the pump house or storage tanks and the injection well, isolated by shut-off valves, for collection of representative samples of the injected fluid; and
- (b) one-half (1/2) inch female iron pipe fitting, isolated by shut-off valves and located at the wellhead at a conveniently accessible location, for the attachment of a pressure gauge capable of monitoring pressures ranging from normal operating pressures up to the Maximum Allowable Injection Pressure specified in APPENDIX C:
 - (i) on the injection tubing; and
 - (ii) on the tubing-casing annulus (TCA); and
- (c) a pressure actuated shut-off device attached to the injection flow line set to shut-off the injection pump when or before the Maximum Allowable Injection Pressure (MAIP) specified in APPENDIX C is reached at the wellhead; and
- (d) a non-resettable cumulative volume recorder attached to the injection line.

4. Well Logging and Testing

Well logging and testing requirements are found in APPENDIX B. The Permittee shall ensure the log and test requirements are performed within the time frames specified in APPENDIX B. Well logs and tests shall be performed according to current EPA-approved procedures. Well log and test results shall be submitted to the Director within sixty (60) days of completion of the logging or testing activity, and shall include a report describing the methods used during logging or testing and an interpretation of the test or log results.

5. Postponement of Construction or Conversion

The Permittee shall complete well construction within one year of the Effective Date of the Permit, or in the case of an Area Permit within one year of Authorization of the additional well. Authorization to construct and operate shall expire if the well has not been constructed within one year of the Effective Date of the Permit or Authorization and the Permit may be terminated under 40 CFR 144.40, unless the Permittee has notified the Director and requested an extension prior to expiration. Notification shall be in writing, and shall state the reasons for the delay and provide an estimated completion date. Once Authorization has expired under this part, the complete permit process including opportunity for public comment may be required before Authorization to construct and operate may be reissued.

6. Workovers and Alterations

Workovers and alterations shall meet all conditions of the Permit. Prior to beginning any addition or physical alteration to an injection well that may significantly affect the tubing, packer or casing, the Permittee shall give advance notice to the Director and obtain the Director's approval. The Permittee shall record all changes to well construction on a Well Rework Record (EPA Form 7520-12), and shall provide this and any other record of well workover, logging, or test data to EPA within sixty (60) days of completion of the activity.

A successful demonstration of Part I MI is required following the completion of any well workover or alteration which affects the casing, tubing, or packer. Injection operations shall not be resumed until the well has successfully demonstrated mechanical integrity and the Director has provided written approval to resume injection.

Section B. MECHANICAL INTEGRITY

The Permittee is required to ensure each injection well maintains mechanical integrity at all times. The Director, by written notice, may require the Permittee to comply with a schedule describing when mechanical integrity demonstrations shall be made.

An injection well has mechanical integrity if:

- (a) There is no significant leak in the casing, tubing, or packer (Part I); and
- (b) There is no significant fluid movement into an underground source of drinking water through vertical channels adjacent to the injection well bore (Part II).

1. *Demonstration of Mechanical Integrity (MI).*

The operator shall demonstrate MI prior to commencing injection and periodically thereafter. Well-specific conditions dictate the methods and the frequency for demonstrating MI and are discussed in the Statement of Basis. The logs and tests are designed to demonstrate both internal (Part I) and external (Part II) MI as described above. The conditions present at this well site warrant the methods and frequency required in Appendix B of this Permit.

In addition to these regularly scheduled demonstrations of MI, the operator shall demonstrate internal (Part I) MI after any workover which affects the tubing, packer or casing.

The Director may require additional or alternative tests if the results presented by the operator are not satisfactory to the Director to demonstrate there is no movement of fluid into or between USDWs resulting from injection activity. Results of MI tests shall be submitted to the Director as soon as possible but no later than sixty (60) days after the test is complete.

2. *Mechanical Integrity Test Methods and Criteria*

EPA-approved methods shall be used to demonstrate mechanical integrity. Ground Water Section Guidance No. 34 "Cement Bond Logging Techniques and Interpretation", Ground Water Section Guidance No. 37, "Demonstrating Part II (External) Mechanical Integrity for a Class II injection well permit", and Ground Water Section Guidance No. 39, "Pressure Testing Injection Wells for Part I (Internal) Mechanical Integrity" are available from EPA and will be provided upon request.

The Director may stipulate specific test methods and criteria best suited for a specific well construction and injection operation.

3. *Notification Prior to Testing.*

The Permittee shall notify the Director at least 30 days prior to any scheduled mechanical integrity test. The Director may allow a shorter notification period if it would be sufficient to enable EPA to witness the mechanical integrity test. Notification may be in the form of a yearly or quarterly schedule of planned mechanical integrity tests, or it may be on an individual basis.

4. *Loss of Mechanical Integrity.*

If the well fails to demonstrate mechanical integrity during a test, or a loss of mechanical integrity becomes evident during operation (such as presence of pressure in the TCA, water flowing at the surface, etc.), the Permittee shall notify the Director within 24 hours (see Part III Section E Paragraph 11(e) of this Permit) and the well shall be shut-in within 48 hours unless the Director requires immediate shut-in.

Within five days, the Permittee shall submit a follow-up written report that documents test results, repairs undertaken or a proposed remedial action plan.

Injection operations shall not be resumed until after the well has successfully been repaired and demonstrated mechanical integrity, and the Director has provided approval to resume injection.

Section C. WELL OPERATION

INJECTION BETWEEN THE OUTERMOST CASING PROTECTING UNDERGROUND SOURCES OF DRINKING WATER AND THE WELL BORE IS PROHIBITED.

Injection is approved under the following conditions:

1. Requirements Prior to Commencing Injection.

Well injection, including for new wells authorized by an Area Permit under 40 CFR 144.33 (c), may commence only after all well construction and pre-injection requirements herein have been met and approved. The Permittee may not commence injection until construction is complete, and

- (a) The Permittee has submitted to the Director a notice of completion of construction and a completed EPA Form 7520-10 or 7520-12; all applicable logging and testing requirements of this Permit (see APPENDIX B) have been fulfilled and the records submitted to the Director; mechanical integrity pursuant to 40 CFR 146.8 and Part II Section B of this Permit has been demonstrated; and
 - (i) The Director has inspected or otherwise reviewed the new injection well and finds it is in compliance with the conditions of the Permit; or
 - (ii) The Permittee has not received notice from the Director of his or her intent to inspect or otherwise review the new injection well within 13 days of the date of the notice in Paragraph 1a, in which case prior inspection or review is waived and the Permittee may commence injection.

2. Injection Interval.

Injection is permitted only within the approved injection interval, listed in APPENDIX C. Additional individual injection perforations may be added provided that they remain within the approved injection interval and the Permittee provides notice to the Director in accordance with Part II, Section A, Paragraph 6.

3. Injection Pressure Limitation

- (a) The permitted Maximum Allowable Injection Pressure (MAIP), measured at the wellhead, is found in APPENDIX C. Injection pressure shall not exceed the amount the Director determines is appropriate to ensure that injection does not initiate new fractures or propagate existing fractures in the confining zone adjacent to USDWs. In no case shall injection pressure cause the movement of injection or formation fluids into a USDW.
- (b) The Permittee may request a change of the MAIP, or the MAIP may be increased or decreased by the Director in order to ensure that the requirements in Paragraph (a) above are fulfilled. The Permittee may be required to conduct a step rate injection test or other suitable test to provide information for determining the fracture pressure of the injection zone. Change of the permitted MAIP by the Director shall be by modification of this Permit and APPENDIX C.

4. Injection Volume Limitation.

Injection volume is limited to the total volume specified in APPENDIX C.

5. Injection Fluid Limitation.

Injected fluids are limited to those identified in 40 CFR 144.6(b)(2) as fluids used for enhanced recovery of oil or natural gas, including those which are brought to the surface in connection with conventional oil or natural gas production that may be commingled with waste waters from gas plants which are an integral part of production operations unless those waters are classified as a hazardous waste at the time of injection, pursuant to 40 CFR 144.6(b). Non-exempt wastes, including unused fracturing fluids or acids, gas plant cooling tower cleaning wastes, service wastes and vacuum truck wastes, are NOT approved for injection. This well is NOT approved for commercial brine injection, industrial waste fluid disposal or injection of hazardous waste as defined by CFR 40 Part 261. The Permittee shall provide a listing of the sources of injected fluids in accordance with the reporting requirements in Part II Section D Paragraph 4 and APPENDIX D of this Permit.

6. Tubing-Casing Annulus (TCA)

The tubing-casing annulus (TCA) shall be filled with water treated with a corrosion inhibitor, or other fluid approved by the Director. The TCA valve shall remain closed during normal operating conditions and the TCA pressure shall be maintained at zero (0) psi.

If TCA pressure cannot be maintained at zero (0) psi, the Permittee shall follow the procedures in Ground Water Section Guidance No. 35 "Procedures to follow when excessive annular pressure is observed on a well."

Section D. MONITORING, RECORDKEEPING, AND REPORTING OF RESULTS

1. Monitoring Parameters, Frequency, Records and Reports.

Monitoring parameters are specified in APPENDIX D. Pressure monitoring recordings shall be taken at the wellhead. The listed parameters are to be monitored, recorded and reported at the frequency indicated in APPENDIX D even during periods when the well is not operating.

Monitoring records must include:

- (a) the date, time, exact place and the results of the observation, sampling, measurement, or analysis, and;
- (b) the name of the individual(s) who performed the observation, sampling, measurement, or analysis, and;
- (c) the analytical techniques or methods used for analysis.

2. Monitoring Methods.

- (a) Monitoring observations, measurements, samples, etc. taken for the purpose of complying with these requirements shall be representative of the activity or condition being monitored.

- (b) Methods used to monitor the nature of the injected fluids must comply with analytical methods cited and described in Table 1 of 40 CFR 136.3 or Appendix III of 40 CFR 261, or by other methods that have been approved in writing by the Director.
- (c) Injection pressure, annulus pressure, injection rate, and cumulative injected volumes shall be observed and recorded at the wellhead under normal operating conditions, and all parameters shall be observed simultaneously to provide a clear depiction of well operation.
- (d) Pressures are to be measured in pounds per square inch (psi).
- (e) Fluid volumes are to be measured in standard oil field barrels (bbl).
- (f) Fluid rates are to be measured in barrels per day (bbl/day).

3. Records Retention.

- (a) Records of calibration and maintenance, and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the application for this permit shall be retained for a period of AT LEAST THREE (3) YEARS from the date of the sample, measurement, report, or application. This period may be extended anytime prior to its expiration by request of the Director.
- (b) Records of the nature and composition of all injected fluids must be retained until three (3) years after the completion of any plugging and abandonment (P&A) procedures specified under 40 CFR 144.52(a)(6) or under Part 146 Subpart G, as appropriate. The Director may require the Permittee to deliver the records to the Director at the conclusion of the retention period. The Permittee shall continue to retain the records after the three (3) year retention period unless the Permittee delivers the records to the Director or obtains written approval from the Director to discard the records.
- (c) The Permittee shall retain records at the location designated in APPENDIX D.

4. Annual Reports.

Whether the well is operating or not, the Permittee shall submit an Annual Report to the Director that summarizes the results of the monitoring required by Part II Section D and APPENDIX D.

The first Annual Report shall cover the period from the effective date of the Permit through December 31 of that year. Subsequent Annual Reports shall cover the period from January 1 through December 31 of the reporting year. Annual Reports shall be submitted by February 15 of the year following data collection. EPA Form 7520-11 may be copied and shall be used to submit the Annual Report, however, the monitoring requirements specified in this Permit are mandatory even if EPA Form 7520-11 indicates otherwise.

Section E. PLUGGING AND ABANDONMENT

1. Notification of Well Abandonment, Conversion or Closure.

The Permittee shall notify the Director in writing at least forty-five (45) days prior to: 1) plugging and abandoning an injection well, 2) converting to a non-injection well, and 3) in the case of an Area Permit, before closure of the project.

2. Well Plugging Requirements

Prior to abandonment, the injection well shall be plugged with cement in a manner which isolates the injection zone and prevents the movement of fluids into or between underground sources of drinking water, and in accordance with 40 CFR 146.10 and other applicable Federal, State or local law or regulations. Tubing, packer and other downhole apparatus shall be removed. Cement with additives such as accelerators and retarders that control or enhance cement properties may be used for plugs; however, volume-extending additives and gel cements are not approved for plug use. Plug placement shall be verified by tagging. Plugging gel of at least 9.6 lb/gal shall be placed between all plugs. A minimum 50 ft surface plug shall be set inside and outside of the surface casing to seal pathways for fluid migration into the subsurface. The Plugging Record must be certified as accurate and complete by the person responsible for the plugging operation. Prior to placement of the cement plug(s) the well shall be in a state of static equilibrium with the mud weight equalized top to bottom, either by circulating the mud in the well at least once or by a comparable method prescribed by the Director.

3. Approved Plugging and Abandonment Plan.

The approved plugging and abandonment plan is incorporated into this Permit as APPENDIX E. Changes to the approved plugging and abandonment plan must be approved by the Director prior to beginning plugging operations. The Director also may require revision of the approved plugging and abandonment plan at any time prior to plugging the well.

4. Forty Five (45) Day Notice of Plugging and Abandonment.

The Permittee shall notify the Director at least forty-five (45) days prior to plugging and abandoning a well and provide notice of any anticipated change to the approved plugging and abandonment plan.

5. Plugging and Abandonment Report.

Within sixty (60) days after plugging a well, the Permittee shall submit a report (EPA Form 7520-13) to the Director. The plugging report shall be certified as accurate by the person who performed the plugging operation. Such report shall consist of either:

- (a) A statement that the well was plugged in accordance with the approved plugging and abandonment plan; or
- (b) Where actual plugging differed from the approved plugging and abandonment plan, an updated version of the plan, on the form supplied by the Director, specifying the differences.

6. Inactive Wells.

After any period of two years during which there is no injection the Permittee shall plug and abandon the well in accordance with Part II Section E Paragraph 2 of this Permit unless the Permittee:

- (a) Provides written notice to the Director;
- (b) Describes the actions or procedures the Permittee will take to ensure that the well will not endanger USDWs during the period of inactivity. These actions and procedures shall include compliance with mechanical integrity demonstration, Financial Responsibility and all other permit requirements designed to protect USDWs; and
- (c) Receives written notice by the Director temporarily waiving plugging and abandonment requirements.

PART III. CONDITIONS APPLICABLE TO ALL PERMITS

Section A. EFFECT OF PERMIT

The Permittee is allowed to engage in underground injection in accordance with the conditions of this Permit. The Permittee shall not construct, operate, maintain, convert, plug, abandon, or conduct any other activity in a manner that allows the movement of fluid containing any contaminant into underground sources of drinking water, if the presence of that contaminant may cause a violation of any primary drinking water regulation under 40 CFR 142 or may otherwise adversely affect the health of persons. Any underground injection activity not authorized by this Permit or by rule is prohibited. Issuance of this Permit does not convey property rights of any sort or any exclusive privilege; nor does it authorize any injury to persons or property, any invasion of other private rights, or any infringement of any other Federal, State or local law or regulations. Compliance with the terms of this Permit does not constitute a defense to any enforcement action brought under the provisions of Section 1431 of the Safe Drinking Water Act (SDWA) or any other law governing protection of public health or the environment, for any imminent and substantial endangerment to human health or the environment, nor does it serve as a shield to the Permittee's independent obligation to comply with all UIC regulations. Nothing in this Permit relieves the Permittee of any duties under applicable regulations.

Section B. CHANGES TO PERMIT CONDITIONS

1. Modification, Reissuance, or Termination.

The Director may, for cause or upon a request from the Permittee, modify, revoke and reissue, or terminate this Permit in accordance with 40 CFR 124.5, 144.12, 144.39, and 144.40. Also, this Permit is subject to minor modification for causes as specified in 40 CFR 144.41. The filing of a request for modification, revocation and reissuance, termination, or the notification of planned changes or anticipated noncompliance on the part of the Permittee does not stay the applicability or enforceability of any condition of this Permit.

2. Conversions.

The Director may, for cause or upon a written request from the Permittee, allow conversion of the well from a Class II injection well to a non-Class II well. Conversion may not proceed until the Permittee receives written approval from the Director. Conditions of such conversion may include but are not limited to, approval of the proposed well rework, follow up demonstration of mechanical integrity, well-specific monitoring and reporting following the conversion, and demonstration of practical use of the converted configuration.

3. Transfer of Permit.

Under 40 CFR 144.38, this Permit is transferable provided the current Permittee notifies the Director at least thirty (30) days in advance of the proposed transfer date (EPA Form 7520-7) and provides a written agreement between the existing and new Permittees containing a specific date for transfer of Permit responsibility, coverage and liability between them. The notice shall adequately demonstrate that the financial responsibility requirements of 40 CFR 144.52(a)(7) will be met by the new Permittee. The Director may require modification or revocation and reissuance of the Permit to change the name of the Permittee and incorporate such other requirements as may be necessary under the Safe Drinking Water Act; in some cases, modification or revocation and reissuance is mandatory.

4. Permittee Change of Address.

Upon the Permittee's change of address, or whenever the operator changes the address where monitoring records are kept, the Permittee must provide written notice to the Director within 30 days.

5. Construction Changes, Workovers, Logging and Testing Data

The Permittee shall give advance notice to the Director, and shall obtain the Director's written approval prior to any physical alterations or additions to the permitted facility. Alterations or workovers shall meet all conditions as set forth in this permit. The Permittee shall record any changes to the well construction on a Well Rework Record (EPA Form 7520-12), and shall provide this and any other record of well workovers, logging, or test data to EPA within sixty (60) days of completion of the activity.

Following the completion of any well workovers or alterations which affect the casing, tubing, or packer, a successful demonstration of mechanical integrity (Part III, Section F of this permit) shall be made, and written authorization from the Director received, prior to resuming injection activities.

Section C. SEVERABILITY

The Provisions of this Permit are severable, and if any provision of this Permit or the application of any provision of this Permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this Permit shall not be affected thereby.

Section D. CONFIDENTIALITY

In accordance with 40 CFR Part 2 and 40 CFR 144.5, information submitted to EPA pursuant to this Permit may be claimed as confidential by the submitter. Any such claim must be asserted at the time of submission by stamping the words "confidential business information" on each page containing such information. If no claim is made at the time of submission, EPA may make the information available to the public without further notice. If a claim is asserted, the validity of the claim will be assessed in accordance with the procedures in 40 CFR Part 2 (Public Information). Claims of confidentiality for the following information will be denied:

- The name and address of the Permittee, and
- information which deals with the existence, absence or level of contaminants in drinking water.

Section E. GENERAL PERMIT REQUIREMENTS

1. Duty to Comply.

The Permittee must comply with all conditions of this Permit. Any noncompliance constitutes a violation of the Safe Drinking Water Act (SDWA) and is grounds for enforcement action; for Permit termination, revocation and reissuance, or modification; or for denial of a permit renewal application; except that the Permittee need not comply with the provisions of this Permit to the extent and for the duration such noncompliance is authorized in an emergency permit under 40 CFR 144.34. All violations of the SDWA may subject the Permittee to penalties and/or criminal prosecution as specified in Section 1423 of the SDWA.

2. Duty to Reapply.

If the Permittee wishes to continue an activity regulated by this Permit after the expiration date of this Permit, under 40 CFR 144.37 the Permittee must apply for a new permit prior to the expiration date.

3. Need to Halt or Reduce Activity Not a Defense.

It shall not be a defense for a Permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this Permit.

4. Duty to Mitigate.

The Permittee shall take all reasonable steps to minimize or correct any adverse impact on the environment resulting from noncompliance with this Permit.

5. Proper Operation and Maintenance.

The Permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the Permittee to achieve compliance with the conditions of this Permit. Proper operation and maintenance includes effective performance, adequate funding, adequate operator staffing and training, and adequate laboratory and process controls, including appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems only when necessary to achieve compliance with the conditions of this Permit.

6. Permit Actions.

This Permit may be modified, revoked and reissued or terminated for cause. The filing of a request by the Permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance, does not stay any permit condition.

7. Property Rights.

This Permit does not convey any property rights of any sort, or any exclusive privilege.

8. Duty to Provide Information.

The Permittee shall furnish to the Director, within a time specified, any information which the Director may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with this permit. The Permittee shall also furnish to the Director, upon request, copies of records required to be kept by this Permit. The Permittee is required to submit any information required by this Permit or by the Director to the mailing address designated in writing by the Director.

9. Inspection and Entry.

The Permittee shall allow the Director, or an authorized representative, upon the presentation of credentials and other documents as may be required by law, to:

- (a) Enter upon the Permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this Permit;

- (b) Have access to and copy, at reasonable times, any records that must be kept under the conditions of this Permit;
- (c) Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this Permit; and,
- (d) Sample or monitor at reasonable times, for the purpose of assuring permit compliance or as otherwise authorized by the SDWA, any substances or parameters at any location.

10. Signatory Requirements.

All applications, reports or other information submitted to the Director shall be signed and certified according to 40 CFR 144.32. This section explains the requirements for persons duly authorized to sign documents, and provides wording for required certification.

11. Reporting Requirements.

- (a) **Planned changes.** The Permittee shall give notice to the Director as soon as possible of any planned changes, physical alterations or additions to the permitted facility, and prior to commencing such changes.
- (b) **Anticipated noncompliance.** The Permittee shall give advance notice to the Director of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements.
- (c) **Monitoring Reports.** Monitoring results shall be reported at the intervals specified in this Permit.
- (d) **Compliance schedules.** Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this Permit shall be submitted no later than 30 days following each schedule date.
- (e) **Twenty-four hour reporting.** The Permittee shall report to the Director any noncompliance which may endanger human health or the environment, including:
 - (i) Any monitoring or other information which indicates that any contaminant may cause endangerment to a USDW; or
 - (ii) Any noncompliance with a permit condition or malfunction of the injection system which may cause fluid migration into or between USDWs.

Information shall be provided, either directly or by leaving a message, within twenty-four (24) hours from the time the permittee becomes aware of the circumstances by telephoning (800) 227-8917 and requesting EPA Region VIII UIC Program Compliance and Technical Enforcement Director, or by contacting the EPA Region VIII Emergency Operations Center at (303) 293-1788.

In addition, a follow up written report shall be provided to the Director within five (5) days of the time the Permittee becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause, the period of noncompliance including exact dates and times, and if the noncompliance has not been corrected the anticipated time it is expected to continue; and the steps taken or planned to reduce, eliminate, and prevent recurrence of the noncompliance.

- (f) Oil Spill and Chemical Release Reporting: The Permittee shall comply with all reporting requirements related to the occurrence of oil spills and chemical releases by contacting the National Response Center (NRC) at (800) 424-8802, (202) 267-2675, or through the NRC website <http://www.nrc.uscg.mil/index.htm>.
- (g) Other Noncompliance. The Permittee shall report all instances of noncompliance not reported under paragraphs Part III, Section E Paragraph 11(b) or Section E, Paragraph 11(e) at the time the monitoring reports are submitted. The reports shall contain the information listed in Paragraph 11(e) of this Section.
- (h) Other information. Where the Permittee becomes aware that it failed to submit any relevant facts in the permit application, or submitted incorrect information in a permit application or in any report to the Director, the Permittee shall promptly submit such facts or information to the Director.

Section F. FINANCIAL RESPONSIBILITY

1. Method of Providing Financial Responsibility.

The Permittee shall maintain continuous compliance with the requirement to maintain financial responsibility and resources to close, plug, and abandon the underground injection well(s). No substitution of a demonstration of financial responsibility shall become effective until the Permittee receives written notification from the Director that the alternative demonstration of financial responsibility is acceptable. The Director may, on a periodic basis, require the holder of a permit to revise the estimate of the resources needed to plug and abandon the well to reflect changes in such costs and may require the Permittee to provide a revised demonstration of financial responsibility.

2. Insolvency.

In the event of:

- (a) the bankruptcy of the trustee or issuing institution of the financial mechanism; or
- (b) suspension or revocation of the authority of the trustee institution to act as trustee; or

- (c) the institution issuing the financial mechanism losing its authority to issue such an instrument

the Permittee must notify the Director in writing, within ten (10) business days, and the Permittee must establish other financial assurance or liability coverage acceptable to the Director within sixty (60) days after any event specified in (a), (b), or (c) above.

The Permittee must also notify the Director by certified mail of the commencement of voluntary or involuntary proceedings under Title 11 (Bankruptcy), U.S. Code naming the owner or operator as debtor, within ten (10) business days after the commencement of the proceeding. A guarantor, if named as debtor of a corporate guarantee, must make such a notification as required under the terms of the guarantee.

APPENDIX A

WELL CONSTRUCTION REQUIREMENTS

See diagram.

The Greater Boundary Federal No. 15-34-8-17 was drilled to a total depth of 6076 (KB) feet in the Basal Carbonate Member of the Green River Formation.

Surface casing (8-5/8 inch) was set at a depth of 315 feet in a 12-1/4 inch hole using 160 sacks of Class "G" cement which was circulated to the surface.

Production casing (5-1/2 inch) was set at a depth of 6066 feet (KB) in a 7-7/8 inch hole with 350 sacks of Premium Lite II and 450 sacks of 50/50 poz mix. This well construction is considered adequate to protect USDW's.

The EPA calculates the top of cement as 1201 feet from the surface.

The schematic diagram shows enhanced recovery injection perforations in the Garden Gulch and Douglas Creek Members of the Green River Formation. Additional perforations may be added at a later time between the depths of 3784 feet and the top of the Wasatch Formation (Estimated to be 6115 feet) provided the operator first notifies the Director and later submits an updated well completion report (EPA Form 7520-12) and schematic diagram.

The packer will be required to be set no higher than 100 feet above the top perforation.

Greater Boundary Federal 15-34-8-17

Spud Date: 6-03-05
Put on Production: 10-03-05

GL: 5052' KB: 5064'

Proposed Injection Wellbore Diagram

Initial Production: 66 BOPD, 6 MCFD, 49 BWPD

SURFACE CASING

CSG SIZE: 8-5/8"
GRADE: J-55 *B2se 450W*
WEIGHT: 24#
LENGTH: 7 jts (304.51')
DEPTH LANDED: 314.51' KB
HOLE SIZE: 12-1/4"
CEMENT DATA: 160 sxs Class "G" cmt, est 5 bbls cmt to surf.

PRODUCTION CASING

CSG SIZE: 5-1/2" *Tonal/Bick Nest 2690'*
GRADE: J-55
WEIGHT: 15.5# *Mahogany Bench 3000' 520'*
LENGTH: 138 jts (6068.08')
DEPTH LANDED: 6066.08' KB
HOLE SIZE: 7-7/8"
CEMENT DATA: 350 sxs Prem. Lite II mixed & 450 sxs 50/50 POZ.
CEMENT TOP AT: 70'

TUBING

SIZE/GRADE/WT.: 2-7/8" / J-55 / 6.5#
NO. OF JOINTS: 180 jts (5596.35')
TUBING ANCHOR: 5606.35' KB
NO. OF JOINTS: 1 jts (31.31')
SEATING NIPPLE: 2-7/8" (1.10')
SN LANDED AT: 5640.46' KB
NO. OF JOINTS: 2 jts (62.13')
TOTAL STRING LENGTH: EOT @ 5704.14' KB


FRAC JOB

09-21-05 5616-5629' **Frac CP1 sands as follows:**
85434# 20/40 sand in 642 bbls Lightning 17 frac fluid. Treated @ avg press of 1258 psi w/avg rate of 25.2 BPM. ISIP 1680 psi. Calc flush: 5614 gal. Actual flush: 5628 gal.

09-21-05 4953-5042' **Frac B.5, & C sands as follows:**
75177# 20/40 sand in 572 bbls Lightning 17 frac fluid. Treated @ avg press of 2413 psi w/avg rate of 27.4 BPM. ISIP 3300 psi. Calc flush: 4951 gal. Actual flush: 4956 gal.

09-21-05 4345-4351' **Frac GB6 sands as follows:**
19307# 20/40 sand in 258 bbls Lightning 17 frac fluid. Treated @ avg press of 2135 psi w/avg rate of 25 BPM. ISIP 2110 psi. Calc flush: 4343 gal. Actual flush: 4368 gal.

09-21-05 4200-4206' **Frac BG2 sands as follows:**
24346# 20/40 sand in 258 bbls Lightning 17 frac fluid. Treated @ avg press of 2168 w/ avg rate of 25 BPM. ISIP 3020 psi. Calc flush: 4198 gal. Actual flush: 4116 gal.

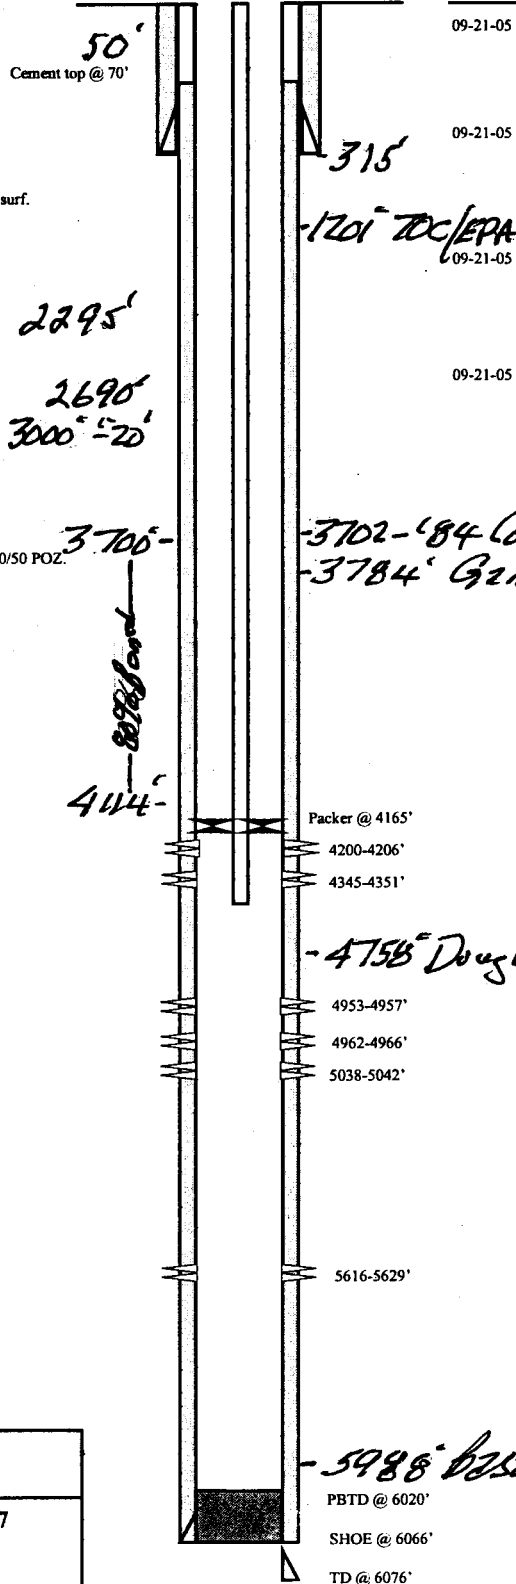

PERFORATION RECORD

Date	Depth Range	Tool Joint	Holes
09-13-05	5616-5629'	4 JSPF	52 holes
09-21-05	5038-5042'	4 JSPF	16 holes
09-21-05	4962-4966'	4 JSPF	16 holes
09-21-05	4953-4957'	4 JSPF	16 holes
09-21-05	4345-4351'	4 JSPF	24 holes
09-21-05	4200-4206'	4 JSPF	24 holes

NEWFIELD

Greater Boundary Federal 15-34-8-17

473' FSL & 2043' FEL

SW/SE Section 34-T8S-R17E

Duchesne Co, Utah

API #43-013-32628; Lease #UTU-79017

APPENDIX B

LOGGING AND TESTING REQUIREMENTS

Logs.

Logs will be conducted according to current UIC guidance. It is the responsibility of the permittee to obtain and use guidance prior to conducting any well logging required as a condition of this permit.

NO LOGGING REQUIREMENTS

Tests.

Tests will be conducted according to current UIC guidance. It is the responsibility of the permittee to obtain and use guidance prior to conducting any well test required as a condition of this permit.

WELL NAME: Greater Boundary Federal 15-34-8-17	
TYPE OF TEST	DATE DUE
Standard Annulus Pressure	Prior to authorization to inject and at least once every five (5) years thereafter.
Pore Pressure	Prior to authorization to inject.

APPENDIX C

OPERATING REQUIREMENTS

MAXIMUM ALLOWABLE INJECTION PRESSURE:

Maximum Allowable Injection Pressure (MAIP) as measured at the surface shall not exceed the pressure(s) listed below.

WELL NAME	MAXIMUM ALLOWED INJECTION PRESSURE (psi)
	ZONE 1 (Upper)
Greater Boundary Federal 15-34-8-17	1,220

INJECTION INTERVAL(S):

Injection is permitted only within the approved injection interval listed below. Injection perforations may be altered provided they remain within the approved injection interval and the Permittee provides notice to the Director in accordance with Part II, Section A, Paragraph 6. Specific injection perforations can be found in Appendix A.

WELL NAME: Greater Boundary Federal 15-34-8-17			
FORMATION NAME	APPROVED INJECTION INTERVAL (KB, ft)		FRACTURE GRADIENT (psi/ft)
	TOP	BOTTOM	
Green River	3,784.00 - 6,115.00		0.730

ANNULUS PRESSURE:

The annulus pressure shall be maintained at zero (0) psi as measured at the wellhead. If this pressure cannot be maintained, the Permittee shall follow the procedures listed under Part II, Section C. 6. of this permit.

MAXIMUM INJECTION VOLUME:

There is no limitation on the number of barrels per day (bbls/day) of water that shall be injected into this well, provided further that in no case shall injection pressure exceed that limit shown in Appendix C.

APPENDIX D

MONITORING AND REPORTING PARAMETERS

This is a listing of the parameters required to be observed, recorded, and reported. Refer to the permit Part II, Section D, for detailed requirements for observing, recording, and reporting these parameters.

OBSERVE MONTHLY AND RECORD AT LEAST ONCE EVERY THIRTY DAYS	
OBSERVE AND RECORD	Injection pressure (psig)
	Annulus pressure(s) (psig)
	Injection rate (bbl/day)
	Fluid volume injected since the well began injecting (bbls)

ANNUALLY	
ANALYZE	Injected fluid total dissolved solids (mg/l)
	Injected fluid specific gravity
	Injected fluid specific conductivity
	Injected fluid pH

ANNUALLY	
REPORT	Each month's maximum and averaged injection pressures (psig)
	Each month's maximum and averaged annulus pressure(s) (psig)
	Each month's averaged injection rate (bbl/day)
	Fluid volume injected since the well began injecting (bbl)
	Written results of annual injected fluid analysis
	Sources of all fluids injected during the year

Records of all monitoring activities must be retained and made available for inspection at the following location:

Newfield Production Company
1401 Seventeenth Street - Suite 1000
Denver, CO 80202

APPENDIX E

PLUGGING AND ABANDONMENT REQUIREMENTS

See diagram.

PLUG NO. 1: Remove downhole apparatus from the well and perform necessary clean out; displace well fluid with plugging gel. Set cast iron bridge plug (CIBP) no more than 100 feet above the top perforation (4200) with a minimum 20-foot cement plug on top.

PLUG NO. 2: Set a balanced cement plug 2640 feet to 3070 feet, i.e., approximately fifty (50) feet above the top of the Trona/Birds Nest and fifty (50) feet below the base of the Mahogany Bench.

PLUG NO. 3: Set a minimum 100-foot balanced cement plug across the contact between the Uinta Formation and the Green River Formation, i.e., 2250 feet to 2350 feet.

PLUG NO. 4: Circulate Class "G" cement down the 5-1/2 inch casing to 365 feet and up the 5-1/2 inch X 8-5/8 inch casings annulus to the surface.

Greater Boundary Federal 15-34-8-17

Spud Date: 6-03-05
Put on Production: 10-03-05
GL: 5052' KB: 5064'

Initial Production: 66 BOPD, 6
MCFD, 49 BWPD

Proposed P & A Wellbore Diagram

SURFACE CASING

CSG SIZE: 8-5/8"
GRADE: J-55 *Base 450W.*
WEIGHT: 24#
LENGTH: 7 js (304.51')
DEPTH LANDED: 314.51' KB
HOLE SIZE: 12-1/4"
CEMENT DATA: 160 sxs Class "G" cmt, est 5 bbls cmt to surf.

50'
Cement top @ 70'

Pump 42 sx Class G Cement down 5 - 1/2" casing to 365'

Casing Shoe @ 315'

1201' TOC/EPA

PRODUCTION CASING

CSG SIZE: 5-1/2" *Cement Plug 2250'-2350'*
GRADE: J-55
WEIGHT: 15.5#
LENGTH: 138 js. (6068.08')
DEPTH LANDED: 6066.08' KB
HOLE SIZE: 7-7/8"
CEMENT DATA: 350 sxs Prem. Lite II mixed & 450 sxs 50/50 POZ.
CEMENT TOP AT: 70' *Cement Plug 2640'-3070'*

2295' Green River

2690' Tranzl/Birds Nest
3000'-3020' Mahogany Bench
3702-3784' Confining Zone
3784' Garden Gulch

80% Bond 3700'-4114'

100' (12 sx) Class G Cement plug on top of CIBP

CIBP @ 4105'

4200-4206'

4345-4351'

4758' Douglas Creek

4953-4957'

4962-4966'

5038-5042'

5616-5629'

5988' Basel Carbonate
PBTD @ 6020'

SHOE @ 6066'

TD @ 6076'

Est. Water 6015'

<p>NEWFIELD</p> <p>Greater Boundary Federal 15-34-8-17</p> <p>473' FSL & 2043' FEL</p> <p>SW/SE Section 34-T8S-R17E</p> <p>Duchesne Co, Utah</p> <p>API #43-013-32628; Lease #UTU-79017</p>

APPENDIX F

CORRECTIVE ACTION REQUIREMENTS

No corrective action is deemed necessary for this project.

STATEMENT OF BASIS

**NEWFIELD PRODUCTION COMPANY
GREATER BOUNDARY FEDERAL 15-34-8-17
DUCHESNE COUNTY, UT**

EPA PERMIT NO. UT21067-07196

CONTACT: Emmett Schmitz
U. S. Environmental Protection Agency
Ground Water Program, 8P-W-GW
1595 Wynkoop Street
Denver, Colorado 80202-1129
Telephone: 1-800-227-8917 ext. 6174

RECEIVED
MAY 15 2007
DIV. OF OIL

This STATEMENT OF BASIS gives the derivation of site-specific UIC Permit conditions and reasons for them. Referenced sections and conditions correspond to sections and conditions in the Permit.

EPA UIC permits regulate the injection of fluids into underground injection wells so that the injection does not endanger underground sources of drinking water. EPA UIC permit conditions are based upon the authorities set forth in regulatory provisions at 40 CFR Parts 144 and 146, and address potential impacts to underground sources of drinking water. Under 40 CFR 144.35 Issuance of this permit does not convey any property rights of any sort or any exclusive privilege, nor authorize injury to persons or property or invasion of other private rights, or any infringement of other Federal, State or local laws or regulations. Under 40 CFR 144 Subpart D, certain conditions apply to all UIC Permits and may be incorporated either expressly or by reference. General Permit conditions for which the content is mandatory and not subject to site-specific differences (40 CFR Parts 144, 146 and 147) are not discussed in this document.

Upon the Effective Date when issued, the Permit authorizes the construction and operation of injection wells so that the injection does not endanger underground sources of drinking water, governed by the conditions specified in the Permit. The Permit is issued for the operating life of the injection well or project unless terminated for reasonable cause under 40 CFR 144.39, 144.40 and 144.41. The Permit is subject to EPA review at least once every five (5) years to determine if action is required under 40 CFR 144.36(a).

PART I. General Information and Description of Facility

Newfield Production Company
1401 Seventeenth Street
Suite 1000
Denver, CO 80202

on

May 18, 2006

submitted an application for an Underground Injection Control (UIC) Program Permit or Permit Modification for the following injection well or wells:

Greater Boundary Federal 15-34-8-17
473' FSL & 2043' FEL, SWSE S34, T8S, R17E
Duchesne County, UT

Regulations specific to Uintah-Ouray Indian Reservation injection wells are found at 40 CFR 147 Subpart TT.

The application, including the required information and data necessary to issue or modify a UIC Permit in accordance with 40 CFR Parts 144, 146 and 147, was reviewed and determined by EPA to be complete.

The Permit will expire upon delegation of primary enforcement responsibility (primacy) for applicable portions of the UIC Program to the Ute Indian Tribe or the State of Utah unless the delegated agency has the authority and chooses to adopt and enforce this Permit as a Tribal or State Permit.

TABLE 1.1 shows the status of the well or wells as "New", "Existing", or "Conversion" and for Existing shows the original date of injection operation. Well authorization "by rule" under 40 CFR Part 144 Subpart C expires automatically on the Effective Date of an issued UIC Permit.

The Greater Boundary Federal 15-34-8-17 is currently a Garden Gulch-Douglas Creek Members of the Green River Formation oil well. The applicant intends to convert this oil well to a Class II enhanced recovery injection well.

TABLE 1.1
WELL STATUS / DATE OF OPERATION

NEW WELLS		
Well Name	Well Status	Date of Operation
Greater Boundary Federal 15-34-8-17	New	N/A

PART II. Permit Considerations (40 CFR 146.24)

The proposed injection well is located in the Newfield Production Company Greater Monument Butte area near the center of the broad, gently northward dipping south flank of the Uinta Basin. The beds dip at about 200'/mile, and there are no known surface folds or faults in the field. The lower 600' to 800' of the Uinta Formation, generally consisting of 5' to 20' thick brown lenticular fluvial sandstone and interbedded varicolored shales, outcrops at the surface in this area. The Uinta is underlain by the Green River Formation which consists of lake (lacustrine) margin sandstones, limestone and shale beds that were deposited along the edges and on the broad level floor of Lake Uinta as it expanded and contracted through time. Underlying the Green River Formation is the Wasatch Formation, which is approximately 2400' thick in this area and consists of red alluvial shales and siltstone with scattered lenticular sandstones usually 10' to 50' thick. Below the Wasatch Formation is the Mesaverde Formation; a series of interbedded continental deposits of shale, sandstone, and coal. Water samples from Mesaverde sands in the nearby Natural Buttes Unit yield highly saline water.

The Uinta Basin is a topographic and structural trough encompassing an area of more than 9300 square mi (14,900 km) in northeast Utah. The basin is sharply asymmetrical, with a steep north flank bounded by the east-west-trending Uinta Mountains, and a gently dipping south flank. The Uinta Basin formed in Paleocene to Eocene time, creating a large area of internal drainage which was filled by ancestral Lake Uinta. Deposition in and around Lake Uinta consisted of open- to marginal-lacustrine sediments that make up the Green River Formation. Alluvial red-bed deposits that are laterally equivalent to and intertongue with the Green River make up the Colton Formation (Wasatch). More than 450 million barrels of oil (63 MT) have been produced from the Green River and Wasatch Formations in the Uinta Basin. The southern shore of Lake Uinta was very broad and flat, which allowed large transgressive and regressive shifts in the shoreline in response to climatic and tectonic-induced rise and fall of the lake. The cyclic nature of Green River deposition in the southern shore area resulted in numerous stacked deltaic deposits. Distributary-mouth bars, distributary channels, and near-shore bars are the primary producing sandstone reservoirs in the area (Ref: "Reservoir Characterization of the Lower Green River Formation, Southwest Uinta Basin, Utah Biannual Technical Progress Report 4/1/99 - 9/30/99", by C. D. Morgan, Program Manager, November 1999, Contract DE-AC26-98BC15103). The Tertiary Duchesne River Formation alluvium generally is present at the surface in this area.

Throughout the current Newfield Production Company area of enhanced recovery injection activity, i.e., T8-9S - R15-19E, Green River Formation water analyses generally exhibit total dissolved (TDS) content well in excess of 10,000 mg/l. A few recent applications for well conversion to enhanced recovery injection contain Green River water analyses with TDS approximating 10,000 mg/l. The State of Utah-Natural Resources ascribes low TDS values to several possibilities involving dilution of Green River water with high TDS values, e.g., recharge of the Green River Formation via Green River Formation outcrop on the Book Cliffs/Roan Cliffs; injection of very low TDS Johnson Water District Reservoir source water; and percolation of surface water via deep-seated Gilsonite veins penetrating lower Green River Members.

Geologic Setting (TABLE 2.1)

TABLE 2.1
GEOLOGIC SETTING
Greater Boundary Federal 15-34-8-17

Formation Name	Top (ft)	Base (ft)	TDS (mg/l)	Lithology
Uinta	0	2,295	< 10,000	Predominantly terrestrial/fluvial sand and shale with some lacustrine sand-shale-carbonate.
Green River	2,295	6,115	33,421	Lacustrine sand-shale-carbonate interbedded with terrestrial/fluvial sand and shale.

Proposed Injection Zone(s) (TABLE 2.2)

An injection zone is a geological formation, group of formations, or part of a formation that receives fluids through a well. The proposed injection zones are listed in TABLE 2.2.

Injection will occur into an injection zone that is separated from USDWs by a confining zone which is free of known open faults or fractures within the Area of Review.

The approved interval for enhanced recovery injection is located between the top of the Garden Gulch Member (3784 feet) and the top of the Wasatch Formation, which is estimated to be 6115 feet.

TABLE 2.2
INJECTION ZONES
Greater Boundary Federal 15-34-8-17

Formation Name	Top (ft)	Base (ft)	TDS (mg/l)	Fracture Gradient (psi/ft)	Porosity	Exempted?*
Green River	3,784	6,115	33,421	0.730		N/A

* C - Currently Exempted
E - Previously Exempted
P - Proposed Exemption
N/A - Not Applicable

Confining Zone(s) (TABLE 2.3)

A confining zone is a geological formation, part of a formation, or a group of formations that limits fluid movement above the injection zone. The confining zone or zones are listed in TABLE 2.3.

The 82-foot (3702 feet - 3784 feet) Confining Interval is composed of impermeable silty shale and shale.

TABLE 2.3
CONFINING ZONES
Greater Boundary Federal 15-34-8-17

Formation Name	Formation Lithology	Top (ft)	Base (ft)
Green River	Silty shale interbedded with shale.	3,702	3,784

Underground Sources of Drinking Water (USDWs) (TABLE 2.4)

Aquifers or the portions thereof which contain less than 10,000 mg/l total dissolved solids (TDS) and are being or could in the future be used as a source of drinking water are considered to be USDWs. The USDWs in the area of this facility are identified in TABLE 2.4.

The State of Utah "Water Wells and Springs", <http://NRWRT1.STATE.UT.US>, identifies no public water supply wells within the one-quarter (1/4) mile Area-of-Review (AOR) around the Greater Boundary Federal No. 15-34-8-17.

Technical Publication No. 92: State of Utah, Department of Natural Resources, cites the base of Underground Sources of Drinking Water (USDW) in the Uinta Formation, approximately 50 feet from the surface.

TABLE 2.4
UNDERGROUND SOURCES OF DRINKING WATER (USDW)
Greater Boundary Federal 15-34-8-17

Formation Name	Formation Lithology	Top (ft)	Base (ft)	TDS (mg/l)
Uinta	Fluvial sand and shale.	0	52	< 10,000

PART III. Well Construction (40 CFR 146.22)

The Greater Boundary Federal No. 15-34-8-17 was drilled to a total depth of 6076 (KB) feet in the Basal Carbonate Member of the Green River Formation.

Surface casing (8-5/8 inch) was set at a depth of 315 feet in a 12-1/4 inch hole using 160 sacks of Class "G" cement which was circulated to the surface.

Production casing (5-1/2 inch) was set at a depth of 6066 feet (KB) in a 7-7/8 inch hole with 350 sacks of Premium Lite II and 450 sacks of 50/50 poz mix. This well construction is considered adequate to protect USDW's.

The EPA calculates the top of cement as 1201 feet from the surface.

The schematic diagram shows enhanced recovery injection perforations in the Garden Gulch and Douglas Creek Members of the Green River Formation. Additional perforations may be added at a later time between the depths of 3784 feet and the top of the Wasatch Formation (Estimated to be 6115 feet) provided the operator first notifies the Director and later submits an updated well completion report (EPA Form 7520-12) and schematic diagram.

The packer will be required to be set no higher than 100 feet above the top perforation.

TABLE 3.1
WELL CONSTRUCTION REQUIREMENTS
Greater Boundary Federal 15-34-8-17

Casing Type	Hole Size (in)	Casing Size (in)	Cased Interval (ft)	Cemented Interval (ft)
Production	7.88	5.50	0 - 6,066	1,201 - 6,076
Surface	12.25	8.63	0 - 315	0 - 315

The approved well completion plan will be incorporated into the Permit as APPENDIX A and will be binding on the Permittee. Modification of the approved plan is allowed under 40 CFR 144.52(a)(1) provided written approval is obtained from the Director prior to actual modification.

Casing and Cementing (TABLE 3.1)

The well construction plan was evaluated and determined to be in conformance with standard practices and guidelines that ensure well injection does not result in the movement of fluids into USDWs. Well construction details for this "new" injection well is shown in TABLE 3.1.

Remedial cementing may be required if the casing cement is shown to be inadequate by cement bond log or other demonstration of Part II (External) mechanical integrity.

Tubing and Packer

Injection tubing is required to be installed from a packer up to the surface inside the well casing. The packer will be set above the uppermost perforation. The tubing and packer are designed to prevent injection fluid from coming into contact with the outermost casing.

Tubing-Casing Annulus (TCA)

The TCA allows the casing, tubing and packer to be pressure-tested periodically for mechanical integrity, and will allow for detection of leaks. The TCA will be filled with fresh water treated with a corrosion inhibitor or other fluid approved by the Director.

The tubing/casing annulus must be kept closed at all times so that it can be monitored as required under conditions of the Permit.

Monitoring Devices

The permittee will be required to install and maintain wellhead equipment that allows for monitoring pressures and providing access for sampling the injected fluid. Required equipment may include but is not limited to: 1) shut-off valves located at the wellhead on the injection tubing and on the TCA; 2) a flow meter that measures the cumulative volume of injected fluid; 3) fittings or pressure gauges attached to the injection tubing and the TCA for monitoring the injection and TCA pressure; and 4) a tap on the injection line, isolated by shut-off valves, for sampling the injected fluid.

All sampling and measurement taken for monitoring must be representative of the monitored activity.

PART IV. Area of Review, Corrective Action Plan (40 CFR 144.55)

**TABLE 4.1
AOR AND CORRECTIVE ACTION**

Well Name	Type	Status (Abandoned Y/N)	Total Depth (ft)	TOC Depth (ft)	CAP Required (Y/N)
Greater Boundary Fed. 15-34-8-17	Producer	No	6,121	950	No
Harbourtown Federal 44-34	Producer	No	5,880	2,490	No

TABLE 4.1 lists the wells in the Area of Review ("AOR") and shows the well type, operating status, depth, top of casing cement ("TOC") and whether a Corrective Action Plan ("CAP") is required for the well.

Area Of Review

Applicants for Class I, II (other than "existing" wells) or III injection well Permits are required to identify the location of all known wells within the injection well's Area of Review (AOR) which penetrate the injection zone, or in the case of Class II wells operating over the fracture pressure of the formation, all known wells within the area of review that penetrate formations which may be affected by increased pressure. Under 40 CFR 146.6 the AOR may be a fixed radius of not less than one quarter (1/4) mile or a calculated zone of endangering influence. For Area Permits, a fixed width of not less than one quarter (1/4) mile for the circumscribing area may be used.

Corrective Action Plan

For wells in the AOR which are improperly sealed, completed, or abandoned, the applicant shall develop a Corrective Action Plan (CAP) consisting of the steps or modifications that are necessary

to prevent movement of fluid into USDWs.

The CAP will be incorporated into the Permit as APPENDIX F and become binding on the permittee.

PART V. Well Operation Requirements (40 CFR 146.23)

TABLE 5.1
INJECTION ZONE PRESSURES
Greater Boundary Federal 15-34-8-17

Formation Name	Depth Used to Calculate MAIP (ft)	Fracture Gradient (psi/ft)	Initial MAIP (psi)
Green River	4,200	0.730	1,220

Approved Injection Fluid

The approved injection fluid is limited to Class II injection well fluids pursuant to 40 CFR § 144.6(b). For disposal wells injecting water brought to the surface in connection with natural gas storage operations, or conventional oil or natural gas production, the fluid may be commingled and the well used to inject other Class II wastes such as drilling fluids and spent well completion, treatment and stimulation fluid. Injection of non-exempt wastes, including unused fracturing fluids or acids, gas plant cooling tower cleaning wastes, service wastes, and vacuum truck and drum rinsate from trucks and drums transporting or containing non-exempt waste, is prohibited.

The approved injectate shall be a blend of source water from the Johnson Water District Reservoir and Green River Formation produced water from field oil wells.

Injection Pressure Limitation

Injection pressure, measured at the wellhead, shall not exceed a maximum calculated to assure that the pressure used during injection does not initiate new fractures or propagate existing fractures in the confining zones adjacent to the USDWs.

The applicant submitted injection fluid density and injection zone data which was used to calculate a formation fracture pressure and to determine the maximum allowable injection pressure (MAIP), as measured at the surface, for this Permit,

TABLE 5.1 lists the fracture gradient for the injection zone and the approved MAIP, determined according to the following formula:

$$FP = [fg - (0.433 * sg)] * d$$

- FP = formation fracture pressure (measured at surface)
fg = fracture gradient (from submitted data or tests)
sg = specific gravity (of injected fluid)
d = depth to top of injection zone (or top perforation)

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL: OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER		5. LEASE DESIGNATION AND SERIAL NUMBER: USA UTU-79017
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: Route 3 Box 3630 CITY Myton STATE UT ZIP 84052		7. UNIT or CA AGREEMENT NAME: GREATER BOUNDARY II
4. LOCATION OF WELL: FOOTAGES AT SURFACE: 473 FSL 2043 FEL		8. WELL NAME and NUMBER: GRTR BNDRY FED 15-34-8-17
OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: SWSE, 34, T8S, R17E		9. API NUMBER: 4301332628
		10. FIELD AND POOL, OR WILDCAT: MONUMENT BUTTE
		COUNTY: DUCHESNE
		STATE: UT

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input checked="" type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input checked="" type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION (START/STOP) <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLAIR <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUT-OFF <input checked="" type="checkbox"/> OTHER: - Injection Conversion
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 12/04/2008			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

On 12/3/08 Margo Smith with the EPA was contacted concerning the initial MIT on the above listed well. Permission was given at that time to perform the test on 12/8/08. On 12/8/08 the csg was pressured up to 1580 psig and charted for 30 minutes with no pressure loss. The well was not injecting during the test. The tbg pressure was 220 psig during the test. There was not an EPA representative available to witness the test.

EPA# UT21067-07196

API# 43-013-32628

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

NAME (PLEASE PRINT) Callie Duncan	TITLE Production Clerk
SIGNATURE <i>Callie Rott</i>	DATE 12/23/2008

(This space for State use only)

RECEIVED
DEC 24 2008
DIV. OF OIL, GAS & MINING

RECEIVED

DEC 24 2008

Mechanical Integrity Test

Casing or Annulus Pressure Mechanical Integrity Test

DIV. OF OIL, GAS & MINING

U.S. Environmental Protection Agency
Underground Injection Control Program
999 18th Street, Suite 500 Denver, CO 80202-2466

EPA Witness: _____ Date: 12 / 08 / 08
Test conducted by: Dale Giles
Others present: _____

Well Name: <u>Greater Boundary 15-34-8-17</u>	Type: ER SWD	Status: AC TA UC
Field: <u>Greater Boundary Unit</u>		
Location: _____	Sec: <u>34</u> T <u>8</u> N <u>10</u> R <u>17</u> (E) W	County: <u>Duchesne</u> State: <u>UT</u>
Operator: <u>Newfield production co.</u>		
Last MIT: _____	Maximum Allowable Pressure: _____	PSIG

Is this a regularly scheduled test? ☐ Yes ☐ No
Initial test for permit? ☒ Yes ☐ No
Test after well rework? ☐ Yes ☐ No
Well injecting during test? ☐ Yes ☒ No If Yes, rate: _____ bpd

Pre-test casing/tubing annulus pressure: 0 psig


MIT DATA TABLE	Test #1	Test #2	Test #3
TUBING	PRESSURE		
Initial Pressure	<u>220</u> psig	psig	psig
End of test pressure	<u>220</u> psig	psig	psig
CASING / TUBING	ANNULUS	PRESSURE	
0 minutes	<u>1580</u> psig	psig	psig
5 minutes	<u>1580</u> psig	psig	psig
10 minutes	<u>1580</u> psig	psig	psig
15 minutes	<u>1580</u> psig	psig	psig
20 minutes	<u>1580</u> psig	psig	psig
25 minutes	<u>1580</u> psig	psig	psig
30 minutes	<u>1580</u> psig	psig	psig
_____ minutes	psig	psig	psig
_____ minutes	psig	psig	psig
RESULT	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	<input type="checkbox"/> Pass <input type="checkbox"/> Fail	<input type="checkbox"/> Pass <input type="checkbox"/> Fail

Does the annulus pressure build back up after the test? ☐ Yes ☒ No

MECHANICAL INTEGRITY PRESSURE TEST

Additional comments for mechanical integrity pressure test, such as volume of fluid added to annulus and bled back at end of test, reason for failing test (casing head leak, tubing leak, other), etc.:

Signature of MAI: _____

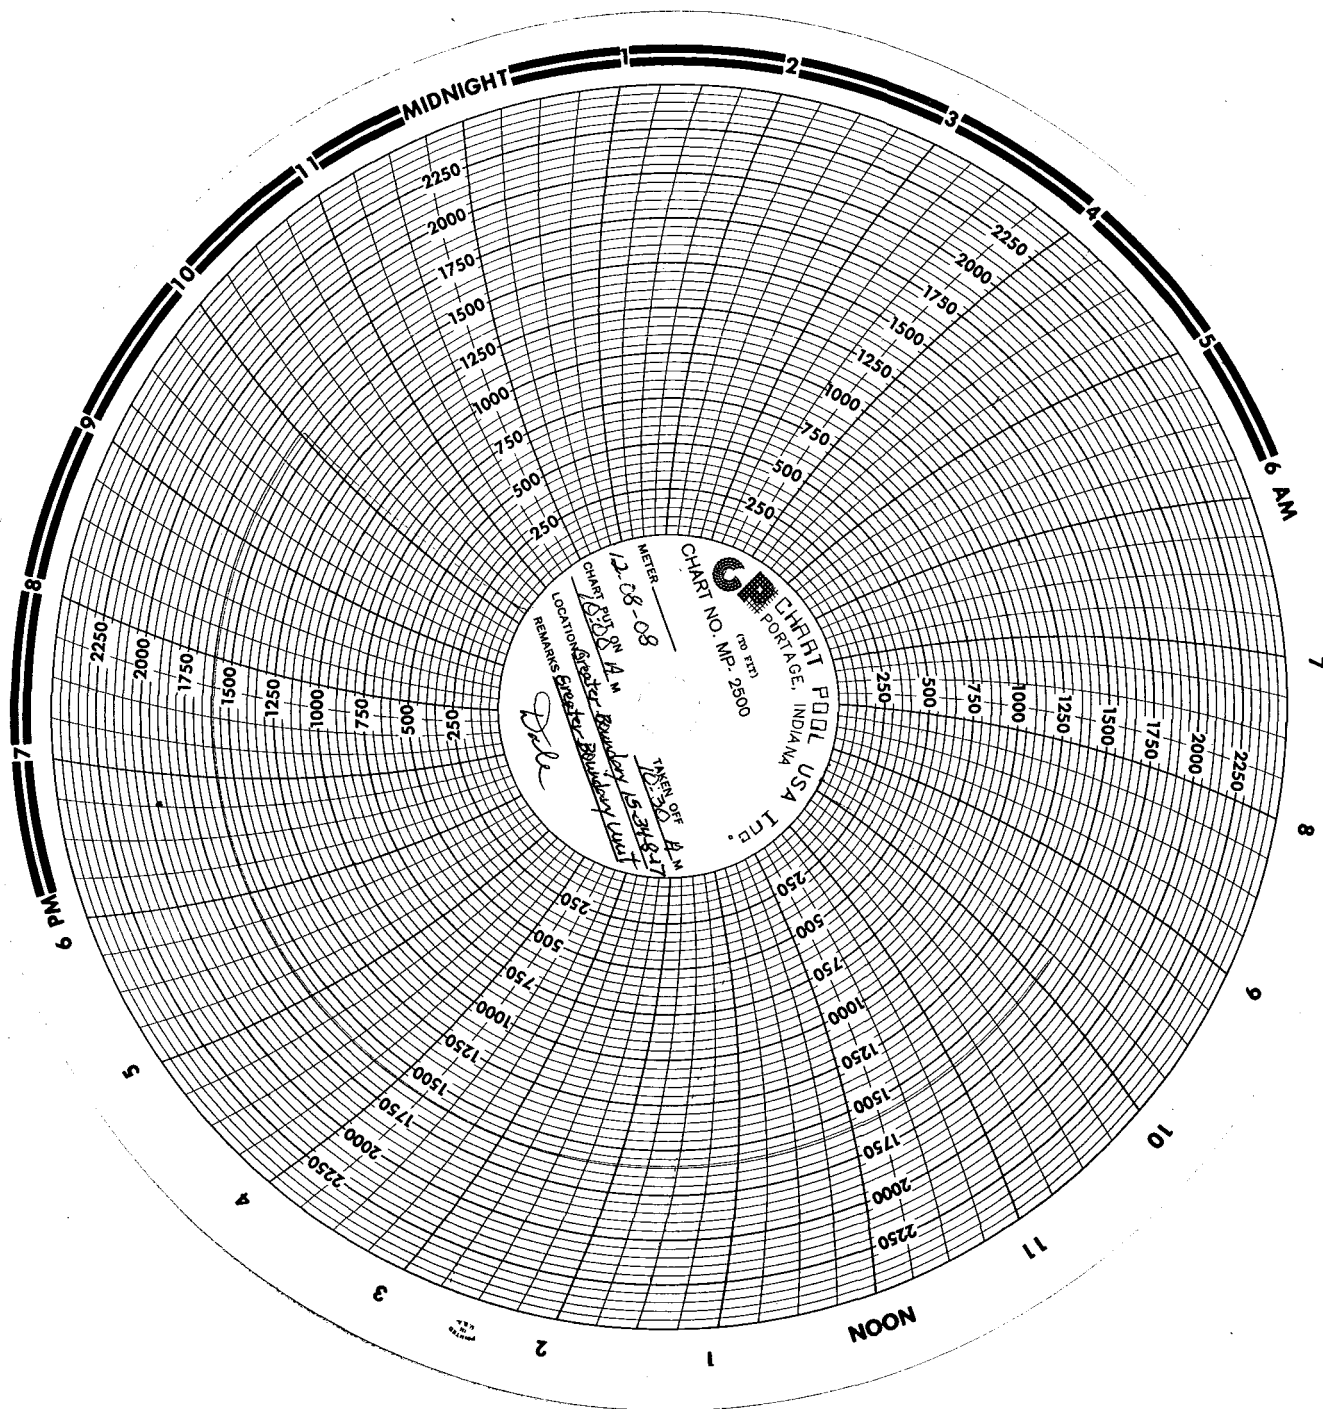

RECEIVED

DEC 24 2008

DIV. OF OIL, GAS & MINING

GRTR BNDRY II 15-34-8-17**11/1/2008 To 1/31/2009****12/4/2008 Day: 1****Conversion**

Western #4 on 12/3/2008 - MIRU Western #4. RU HO trk to annulus & pump 70 BW @ 250°F. RD pumping unit & unseat rod pump. Flush tbg & rods W/ 40 BW @ 250°F. Re-seat pump, soft joint rod string & strip off flow-T. Fill tbg W/ 5 BW & pressure test tbg to 3000 psi. Retrieve rod string & unseat pump. TOH and LD rod string & pump. Re-flushed rods W/ 30 add'l BW on TOH. ND wellhead & release TA @ 5606'. NU BOP. TOH & talley production tbg. Broke each connection, clean & inspect pins and apply Liquid O-ring to pins. Out W/ 100 jts tbg. SIFN.

Daily Cost: \$18,378**Cumulative Cost: \$26,710****12/5/2008 Day: 2****Conversion**

Western #4 on 12/4/2008 - Con't TOH & talley production tbg. Broke each connection, clean & inspect pins and apply Liquid O-ring to pins. LD btm 50 jts tbg and BHA. MU & TIH W/ injection string as follows: new Weatherford 5 1/2" Arrowset 1-X pkr (W/ W.L. re-entry guide & hardened steel slips), new 2 7/8 SN & 133 jts 2 7/8 8rd 6.5# J-55 tbg. RU HO trk & pump 15 bl pad. Drop standing valve & pump to SN. Pressure test tbg to 3000 psi. Held solid for 30 minutes. RIH W/ overshot on sdline. Latch onto & pull standing valve. ND BOP & land tbg on flange. Mix 15 gals Multi-Chem C-6031 & 5 gals B-8625 in 70 bbls fresh wtr. RU HO trk & pump dn annulus @ 90°F. PU on tbg & set pkr W/ SN @ 4145', CE @ 4149' & EOT @ 4153'. Land tbg W/ 15,000# tension. NU wellhead. Pressure test casing & pkr to 1400 psi. Holds solid for 1 hour. Leave pressure on well. RDMOSU. Well ready for MIT.

Daily Cost: \$8,032**Cumulative Cost: \$26,710****12/10/2008 Day: 3****Conversion**

Rigless on 12/9/2008 - On 12/3/08 Margo Smith with the EPA was contacted concerning the initial MIT on the above listed well (Greater Boundary 15-34-8-17). Permission was given at that time to perform the test on 12/8/08. On 12/8/08 the csg was pressured up to 1580 psig and charted for 30 minutes with no pressure loss. The well was not injecting during the test. The tbg pressure was 220 psig during the test. There was not an EPA representative available to witness the test.

EPA# UT21067-07196 API# 43-013-32628**Daily Cost: \$300****Cumulative Cost: \$26,710****RECEIVED****DEC 24 2008****DIV. OF OIL, GAS & MINING**



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
REGION 8

1595 Wynkoop Street
DENVER, CO 80202-1129
Phone 800-227-8917
<http://www.epa.gov/region08>

JAN 08 2009

Ref: 8P-W-GW

CERTIFIED MAIL
RETURN RECEIPT REQUESTED

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

Michael Guinn
District Manager
Newfield Production Company
Route 3 - Box 3630
Myton, UT 84052

RE: **Authority to Commence Injection**
EPA UIC Permit UT21067-07196
Well: Greater Boundary Federal 15-34-8-17
SW/SE Section 34 T8S R17E
Duchesne County, Utah
API #: 43-013-32628

Dear Mr. Guinn:

Newfield Production Company (Newfield) has satisfactorily completed Environmental Protection Agency (EPA) **Prior to Commencing Injection** requirements for Final Permit UT21067-07196, effective May 9, 2007. The Part I (Internal) Mechanical Integrity Test (MIT), Well Rework Record (EPA Form No. 7520-12), schematic diagram, and pore pressure, were reviewed and approved by EPA on January 7, 2009.

As of the date of this letter, Newfield is authorized to commence injection into Greater Boundary Federal 15-34-8-17 at a maximum allowable injection pressure (MAIP) of **1220 psig**. Until such time as the Permittee demonstrates through a Step Rate Test (SRT) that the Fracture Gradient (FG) is other than 0.73 psi/ft, Greater Boundary Federal 15-34-8-17 shall be operated at a MAIP no greater than **1220 psig**.

As of this approval, responsibility for permit compliance and enforcement is transferred to Region 8 UIC Technical Enforcement Program office. Therefore, please direct all monitoring and compliance correspondence to the following address; referencing your well name and UIC Permit number on all correspondence regarding this well to:

RECEIVED
JAN 13 2009
DIV. OF OIL, GAS & MINING


Mr. Nathan Wiser
Technical Enforcement Program – UIC
U.S. EPA Region 8: Mail Code 8ENF-UFO
1595 Wynkoop Street
Denver, CO 80202-1129

Or, you may reach Mr. Wiser by telephone at 303-312-6211, or 1 800-227-8927, ext. 312-6211.

Please remember that it is your responsibility to be aware of and to comply with all conditions of injection well Permit UT21067-07196.

If you have questions regarding the above action, please call Sarah Bahrman at 303-312-6243 or 1-800-227-8917, ext. 312-312-6243.

Sincerely,



for Eddie A. Sierra
Acting Assistant Regional Administrator
Office of Partnerships and Regulatory Assistance

Cc:

Uintah & Ouray Business Committee
Curtis Cesspooch, Chairman
Ronald Groves, Councilman
Irene Cuch, Vice-Chairwoman
Steven Cesspooch, Councilman
Phillip Chimburas, Councilman
Frances Poowegup, Councilwoman

Daniel Picard, Superintendent
BIA - Uintah & Ouray Indian Agency

Michelle Sabori, Acting Environmental Director
GAP-106
Ute Indian Tribe

Larry Love, Director of Energy & Minerals Dept.
Ute Indian Tribe

Elaine Willie
GAP Coordinator

Ute Indian Tribe

Gil Hunt, Associate Director
Utah Division of Oil, Gas, and Mining

Fluid Minerals Engineering Office
BLM - Vernal Office

Eric Sundberg, Regulatory Analyst
Newfield Production Company



STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL:		5. LEASE DESIGNATION AND SERIAL NUMBER:	
OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <u>WI</u>		USA UTU-79017	
2. NAME OF OPERATOR:		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
NEWFIELD PRODUCTION COMPANY		7. UNIT or CA AGREEMENT NAME:	
3. ADDRESS OF OPERATOR:		GRATER BOUNDARY II	
Route 3 Box 3630 CITY Myton STATE UT ZIP 84052		8. WELL NAME and NUMBER:	
4. LOCATION OF WELL:		GRTR BNDRY FED 15-34-8-17	
FOOTAGES AT SURFACE: 473 FSL 2043 FEL		9. API NUMBER:	
OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: SWSE, 34, T8S, R17E		4301332628	
		10. FIELD AND POOL, OR WILDCAT:	
		MONUMENT BUTTE	
		COUNTY: DUCHESNE	
		STATE: UT	


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will 	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARITLY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 01/14/2009	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: - Change status put well on injection
	<input checked="" type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The above reference well was put on injection at 10:30AM on 1-14-09.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

NAME (PLEASE PRINT) Kathy Chapman	TITLE Office Manager
SIGNATURE 	DATE 01/15/2009

(This space for State use only)

RECEIVED

JAN 20 2009

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL: OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <u>WT</u>		5. LEASE DESIGNATION AND SERIAL NUMBER: USA UTU-79017
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: Route 3 Box 3630 CITY Myton STATE UT ZIP 84052		7. UNIT or CA AGREEMENT NAME: GMBU
4. LOCATION OF WELL: FOOTAGES AT SURFACE: 473 FSL 2043 FEL		8. WELL NAME and NUMBER: GRTR BNDRY FED 15-34-8-17
5. PHONE NUMBER: 435.646.3721		9. API NUMBER: 4301332628
6. OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: SWSE, 34, T8S, R17E		10. FIELD AND POOL, OR WILDCAT: GREATER MB UNIT
7. COUNTY: DUCHESNE		8. STATE: UT

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON	
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR	
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: <u>06/22/2011</u>	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: - Step Rate Test	
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION		

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.


A step rate test was conducted on the subject well on June 22, 2011. Results from the test indicate that the fracture gradient is 0.816 psi/ft. Therefore, Newfield is requesting that the maximum allowable injection pressure (MAIP) be changed from 1220 psi to 1580 psi.

EPA: UT21067-07196

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

RECEIVED
JUN 30 2011
DIV. OF OIL, GAS & MINING

NAME (PLEASE PRINT) <u>Lucy Chavez-Naupoto</u>	TITLE <u>Water Services Technician</u>
SIGNATURE <u></u>	DATE <u>06/27/2011</u>

(This space for State use only)

Step Rate Test (SRT) Analysis

Date: 06/22/2011

Operator:

Newfield Production Company

Well:

Greater Boundary Federal 15-34-8-17

Permit #:

UT21067-07196

Enter the following data :

Specific Gravity (sg) of injectate = 1.015 g/cc
Depth to top perforation (D) = 4200 feet
Top of permitted injection zone depth (blank=use top perforation to calculate fg) = feet
Estimated Formation Parting Pressure (Pfp) from SRT chart = 1580 psi
Instantaneous Shut In Pressure (ISIP) from SRT = 1600 psi
Bottom Hole Parting Pressure (Pbhp) from downhole pressure recorder = psi

Part One - Calculation of Fracture Gradient (fg)

Calculated Fracture Gradient = 0.816 psi/ft.

where: $fg = Pbhp / D$ (Note: this formula uses the downhole recorded bottom hole parting pressure if available) = 1600

D = depth used = 4200

Pbhp used = 3426

Calculated Bottom Hole Parting Pressure (Pbhp) = 3426 psi

to calculate Bottom Hole Parting Pressure (Pbhp) = Formation Fracture Pressure (ISIP or Pfp) + (0.433 * SG * D)

(Uses lesser of ISIP or Pfp) Value used = 1580

3425.879

Part Two - Calculation of Maximum Allowable Injection Pressure (MAIP)


Maximum Allowable Injection Pressure (MAIP) = 1580 psig

D = depth used = 4200

MAIP = $[fg \cdot (0.433 \cdot SG)] \cdot D = 1581.321$

(rounded down to nearest 5 psig)

Greater Boundary Federal 15-34-8-17
Greater Monument Butte Unit
Step Rate Test
June 22, 2011

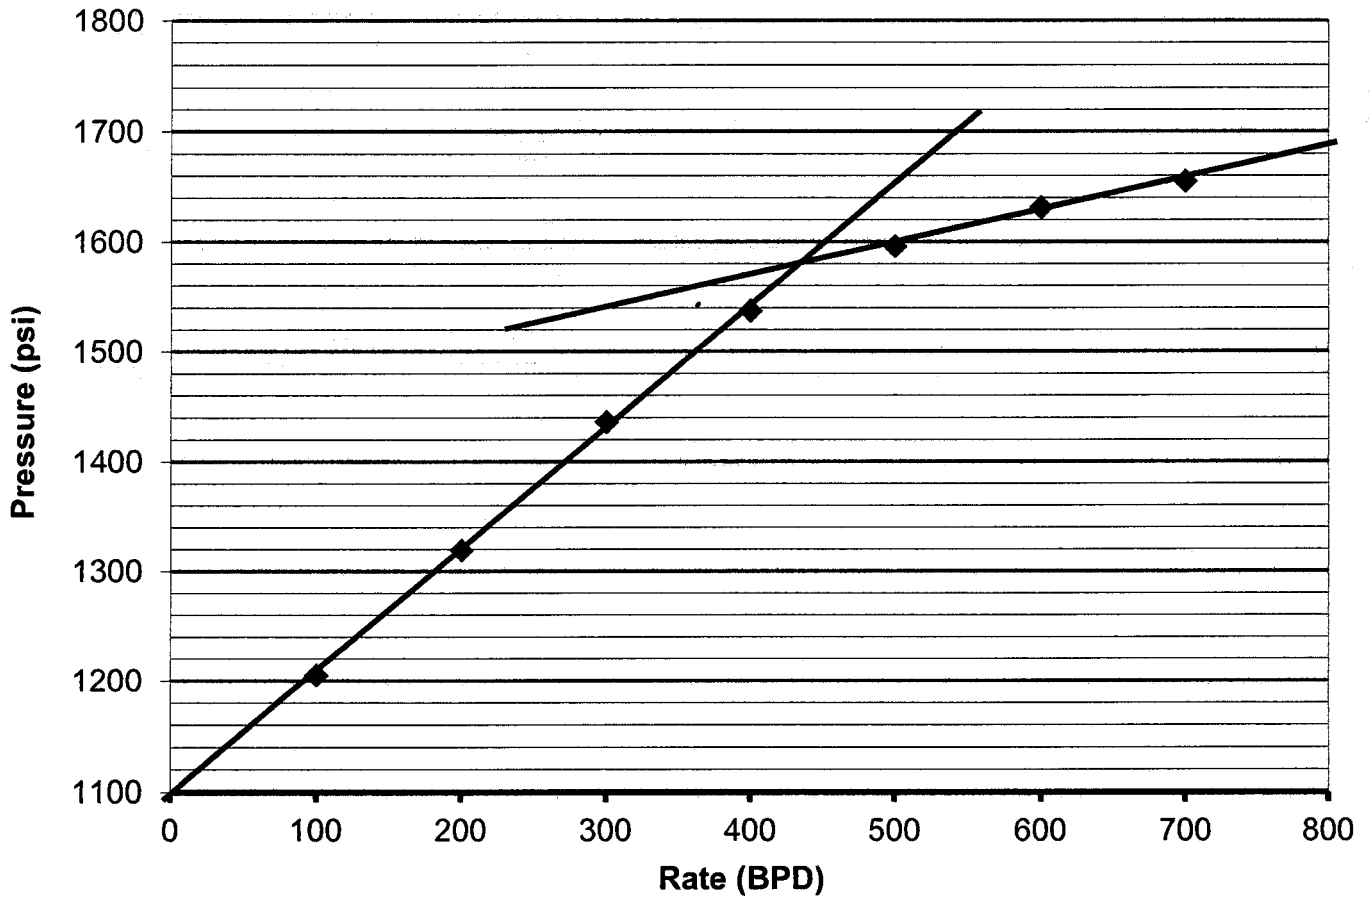

Start Pressure: 1100 psi
Instantaneous Shut In Pressure (ISIP): 1600 psi
Top Perforation: 4200 feet
Fracture pressure (P_{fp}): 1580 psi
FG: 0.816 psi/ft

Step	Rate(bpd)	Pressure(psi)
1	100	1205
2	200	1319
3	300	1436
4	400	1537
5	500	1596
6	600	1631
7	700	1655


PSIA

Absolute Pressure

Greater Boundary Federal 15-34-8-17
SRT (6-22-2011)

Device - PrTemp1000
Serial Number - M75866
Device ID - PrTemp

PSIA

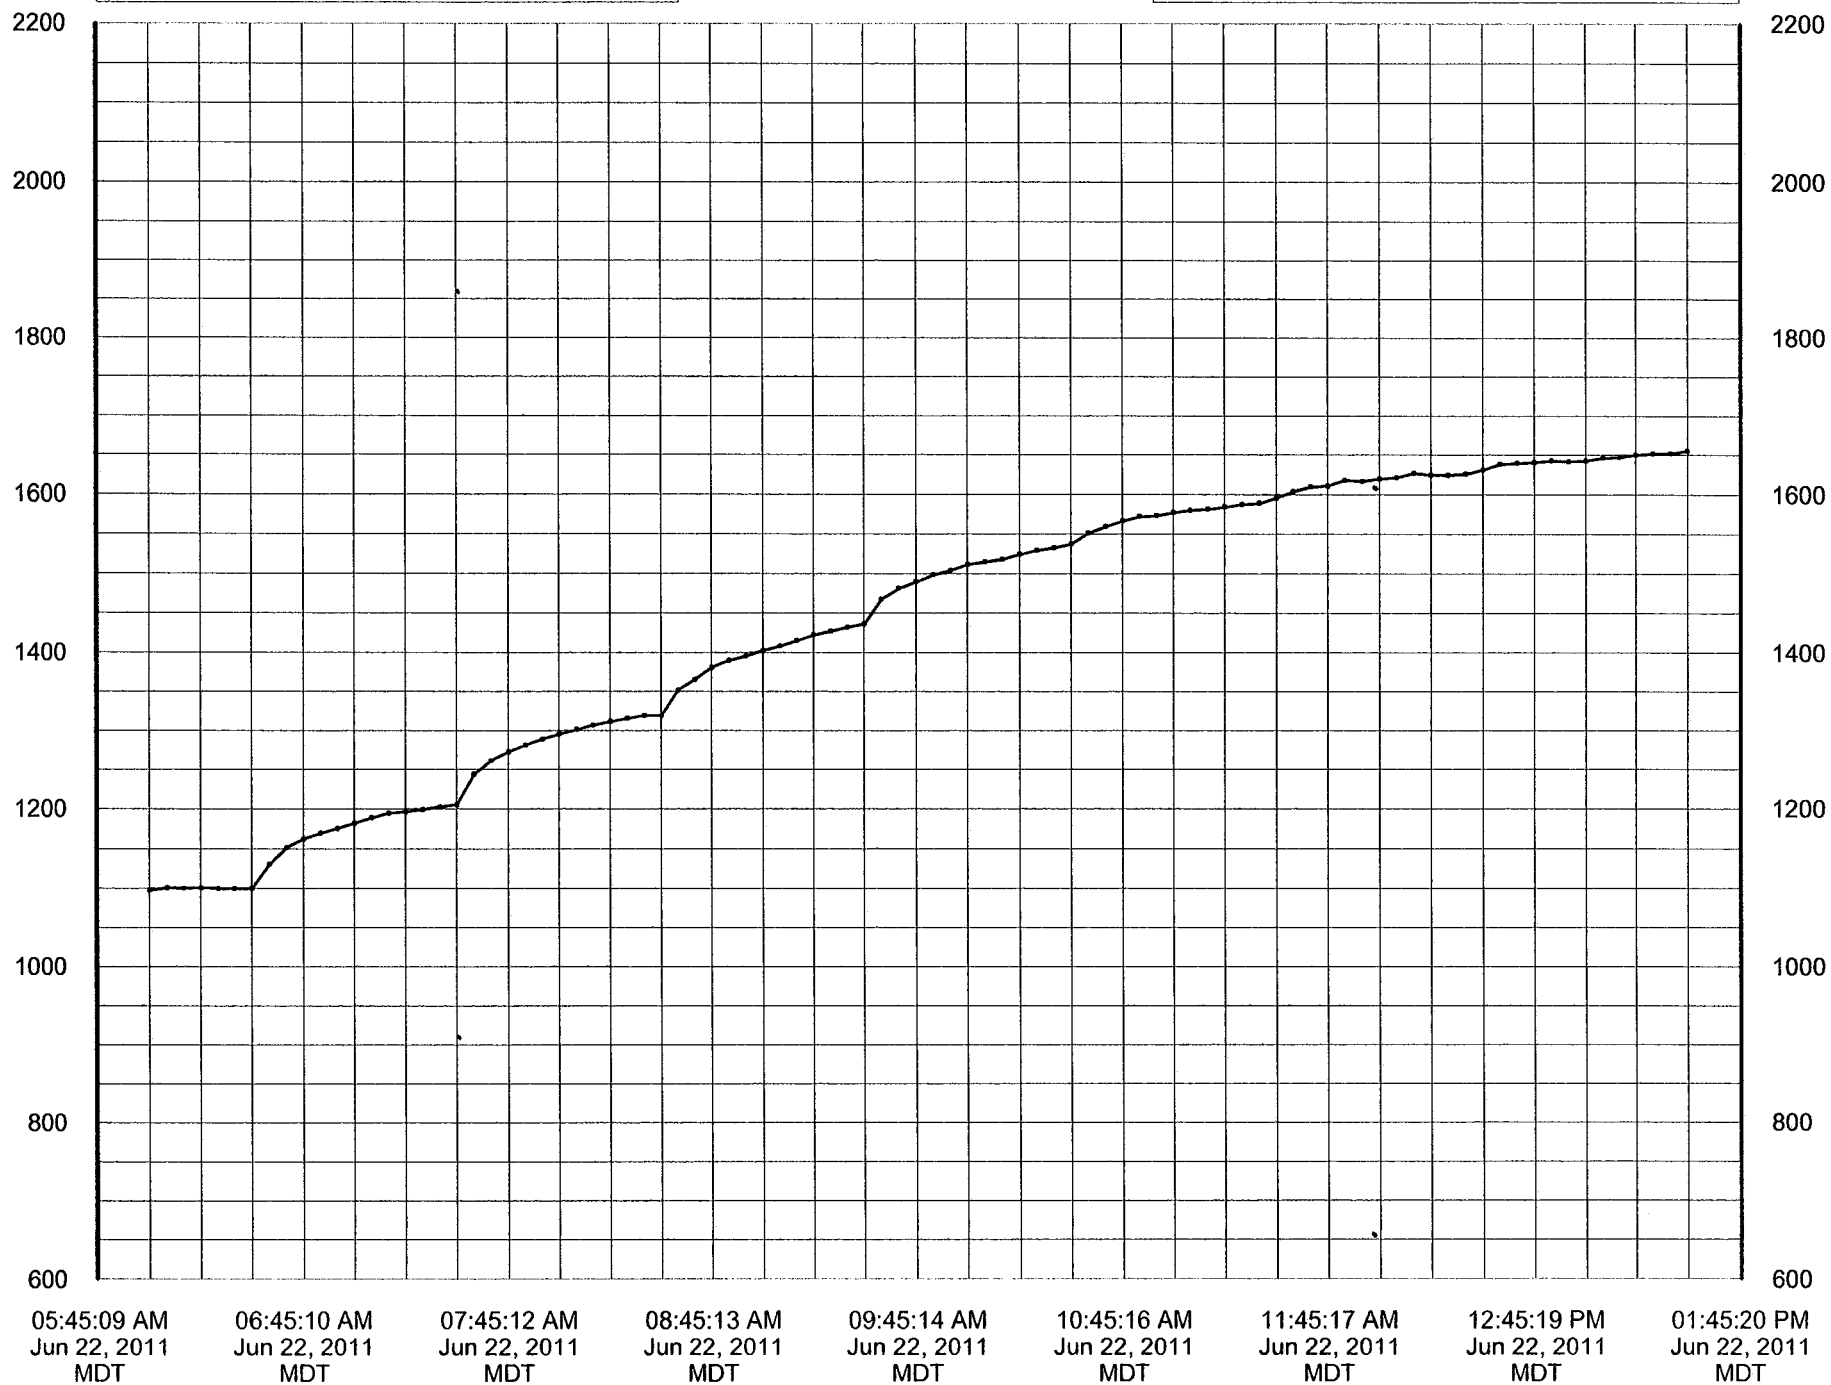

Report Name: PrTemp1000 Data Table
 Report Date: Jun 22, 2011 03:41:11 PM MDT
 File Name: C:\Program Files\PTC® Instruments 2.00\Greater Boundary 15-34-8-17 SRT (6-22-2011).csv
 Title: Greater Boundary Federal 15-34-8-17 SRT (6-22-2011)
 Device: PrTemp1000 - Temperature and Pressure Recorder
 Hardware Revision: REV2C (64K)
 Serial Number: M75866
 Device ID: PrTemp
 Data Start Date: Jun 22, 2011 06:00:15 AM MDT
 Data End Date: Jun 22, 2011 01:30:15 PM MDT
 Reading Rate: 2 Seconds
 Readings: 1 to 91 of 91
 Last Calibration Date: Apr 12, 2011
 Next Calibration Date: Apr 12, 2012

<u>Reading</u>	<u>Date and Time (MDT)</u>	<u>Absolute Pressure</u>	<u>Annotation</u>
1	Jun 22, 2011 06:00:15 AM	1097.400	PSIA
2	Jun 22, 2011 06:05:15 AM	1100.400	PSIA
3	Jun 22, 2011 06:10:14 AM	1099.800	PSIA
4	Jun 22, 2011 06:15:15 AM	1100.400	PSIA
5	Jun 22, 2011 06:20:15 AM	1099.600	PSIA
6	Jun 22, 2011 06:25:15 AM	1099.400	PSIA
7	Jun 22, 2011 06:30:16 AM	1100.000	PSIA
8	Jun 22, 2011 06:35:15 AM	1130.600	PSIA
9	Jun 22, 2011 06:40:15 AM	1151.400	PSIA
10	Jun 22, 2011 06:45:14 AM	1161.600	PSIA
11	Jun 22, 2011 06:50:15 AM	1169.200	PSIA
12	Jun 22, 2011 06:55:15 AM	1175.200	PSIA
13	Jun 22, 2011 07:00:15 AM	1181.800	PSIA
14	Jun 22, 2011 07:05:14 AM	1188.600	PSIA
15	Jun 22, 2011 07:10:15 AM	1194.400	PSIA
16	Jun 22, 2011 07:15:16 AM	1196.000	PSIA
17	Jun 22, 2011 07:20:15 AM	1199.000	PSIA
18	Jun 22, 2011 07:25:16 AM	1202.200	PSIA
19	Jun 22, 2011 07:30:15 AM	1205.000	PSIA
20	Jun 22, 2011 07:35:15 AM	1243.600	PSIA
21	Jun 22, 2011 07:40:15 AM	1261.000	PSIA
22	Jun 22, 2011 07:45:15 AM	1272.400	PSIA
23	Jun 22, 2011 07:50:14 AM	1281.000	PSIA
24	Jun 22, 2011 07:55:15 AM	1288.800	PSIA
25	Jun 22, 2011 08:00:16 AM	1295.400	PSIA
26	Jun 22, 2011 08:05:15 AM	1301.200	PSIA
27	Jun 22, 2011 08:10:16 AM	1306.800	PSIA
28	Jun 22, 2011 08:15:15 AM	1311.400	PSIA
29	Jun 22, 2011 08:20:15 AM	1315.400	PSIA
30	Jun 22, 2011 08:25:15 AM	1319.400	PSIA
31	Jun 22, 2011 08:30:15 AM	1319.000	PSIA
32	Jun 22, 2011 08:35:14 AM	1352.000	PSIA
33	Jun 22, 2011 08:40:15 AM	1365.400	PSIA
34	Jun 22, 2011 08:45:16 AM	1381.000	PSIA
35	Jun 22, 2011 08:50:15 AM	1390.000	PSIA
36	Jun 22, 2011 08:55:16 AM	1395.600	PSIA
37	Jun 22, 2011 09:00:15 AM	1402.800	PSIA
38	Jun 22, 2011 09:05:15 AM	1408.000	PSIA
39	Jun 22, 2011 09:10:15 AM	1415.200	PSIA
40	Jun 22, 2011 09:15:15 AM	1422.400	PSIA
41	Jun 22, 2011 09:20:15 AM	1427.000	PSIA
42	Jun 22, 2011 09:25:15 AM	1432.000	PSIA
43	Jun 22, 2011 09:30:15 AM	1436.400	PSIA
44	Jun 22, 2011 09:35:15 AM	1467.600	PSIA
45	Jun 22, 2011 09:40:15 AM	1481.200	PSIA
46	Jun 22, 2011 09:45:14 AM	1489.800	PSIA
47	Jun 22, 2011 09:50:15 AM	1498.600	PSIA
48	Jun 22, 2011 09:55:15 AM	1504.000	PSIA
49	Jun 22, 2011 10:00:15 AM	1511.600	PSIA
50	Jun 22, 2011 10:05:15 AM	1515.000	PSIA
51	Jun 22, 2011 10:10:14 AM	1518.000	PSIA
52	Jun 22, 2011 10:15:15 AM	1524.600	PSIA
53	Jun 22, 2011 10:20:15 AM	1529.600	PSIA
54	Jun 22, 2011 10:25:16 AM	1532.800	PSIA
55	Jun 22, 2011 10:30:15 AM	1537.400	PSIA
56	Jun 22, 2011 10:35:15 AM	1551.400	PSIA
57	Jun 22, 2011 10:40:15 AM	1559.400	PSIA
58	Jun 22, 2011 10:45:15 AM	1566.600	PSIA
59	Jun 22, 2011 10:50:15 AM	1572.400	PSIA

60	Jun 22, 2011 10:55:15 AM	1573.400	PSIA
61	Jun 22, 2011 11:00:15 AM	1577.000	PSIA
62	Jun 22, 2011 11:05:15 AM	1580.200	PSIA
63	Jun 22, 2011 11:10:16 AM	1581.600	PSIA
64	Jun 22, 2011 11:15:15 AM	1584.600	PSIA
65	Jun 22, 2011 11:20:15 AM	1587.400	PSIA
66	Jun 22, 2011 11:25:15 AM	1589.000	PSIA
67	Jun 22, 2011 11:30:15 AM	1595.600	PSIA
68	Jun 22, 2011 11:35:15 AM	1604.000	PSIA
69	Jun 22, 2011 11:40:15 AM	1609.400	PSIA
70	Jun 22, 2011 11:45:16 AM	1610.400	PSIA
71	Jun 22, 2011 11:50:15 AM	1617.800	PSIA
72	Jun 22, 2011 11:55:16 AM	1616.200	PSIA
73	Jun 22, 2011 12:00:15 PM	1619.400	PSIA
74	Jun 22, 2011 12:05:15 PM	1621.200	PSIA
75	Jun 22, 2011 12:10:15 PM	1626.800	PSIA
76	Jun 22, 2011 12:15:15 PM	1624.200	PSIA
77	Jun 22, 2011 12:20:15 PM	1624.200	PSIA
78	Jun 22, 2011 12:25:15 PM	1625.800	PSIA
79	Jun 22, 2011 12:30:16 PM	1630.800	PSIA
80	Jun 22, 2011 12:35:15 PM	1638.000	PSIA
81	Jun 22, 2011 12:40:16 PM	1639.200	PSIA
82	Jun 22, 2011 12:45:14 PM	1640.200	PSIA
83	Jun 22, 2011 12:50:15 PM	1642.400	PSIA
84	Jun 22, 2011 12:55:15 PM	1641.400	PSIA
85	Jun 22, 2011 01:00:15 PM	1642.200	PSIA
86	Jun 22, 2011 01:05:15 PM	1646.200	PSIA
87	Jun 22, 2011 01:10:15 PM	1646.800	PSIA
88	Jun 22, 2011 01:15:16 PM	1650.000	PSIA
89	Jun 22, 2011 01:20:15 PM	1651.400	PSIA
90	Jun 22, 2011 01:25:16 PM	1652.000	PSIA
91	Jun 22, 2011 01:30:15 PM	1655.400	PSIA


PSIA

Absolute Pressure

Greater Boundary Federal 15-34-8-17
ISIP (6-22-2011)

Device - PrTemp1000
Serial Number - M75866
Device ID - PrTemp

PSIA

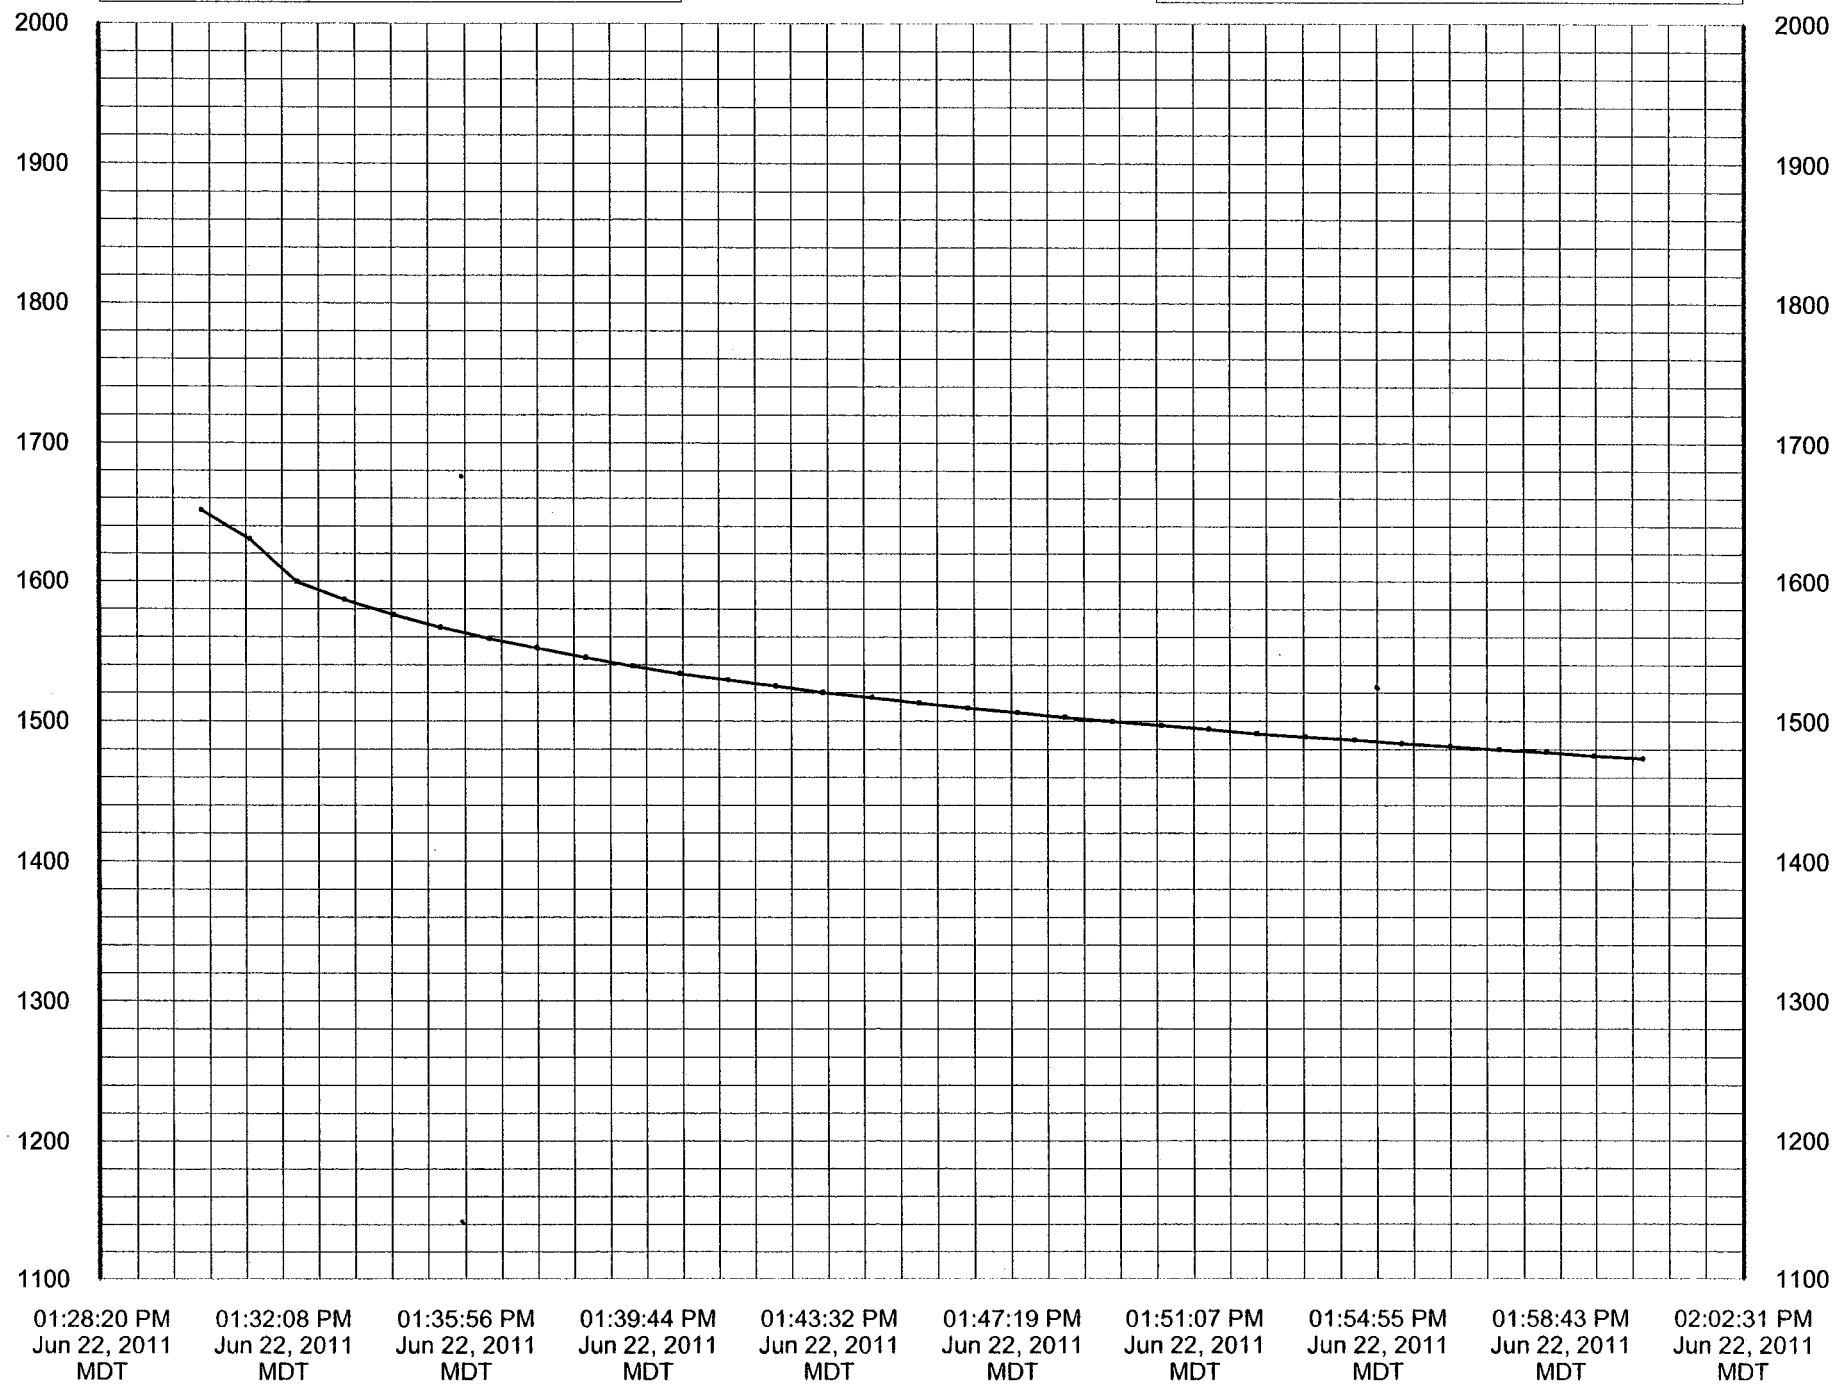

Report Name: PrTemp1000 Data Table
 Report Date: Jun 22, 2011 03:41:05 PM MDT
 File Name: C:\Program Files\PTC® Instruments 2.00\Greater Boundary 15-34-8-17 ISIP (6-22-2011).csv
 Title: Greater Boundary Federal 15-34-8-17 ISIP (6-22-2011)
 Device: PrTemp1000 - Temperature and Pressure Recorder
 Hardware Revision: REV2C (64K)
 Serial Number: M75866
 Device ID: PrTemp
 Data Start Date: Jun 22, 2011 01:30:26 PM MDT
 Data End Date: Jun 22, 2011 02:00:27 PM MDT
 Reading Rate: 2 Seconds
 Readings: 1 to 31 of 31
 Last Calibration Date: Apr 12, 2011
 Next Calibration Date: Apr 12, 2012

<u>Reading</u>	<u>Date and Time (MDT)</u>	<u>Absolute Pressure</u>	<u>Annotation</u>
1	Jun 22, 2011 01:30:26 PM	1651.400	PSIA
2	Jun 22, 2011 01:31:27 PM	1630.400	PSIA
3	Jun 22, 2011 01:32:26 PM	1599.600	PSIA
4	Jun 22, 2011 01:33:26 PM	1686.600	PSIA
5	Jun 22, 2011 01:34:27 PM	1575.800	PSIA
6	Jun 22, 2011 01:35:26 PM	1566.800	PSIA
7	Jun 22, 2011 01:36:26 PM	1558.800	PSIA
8	Jun 22, 2011 01:37:26 PM	1552.000	PSIA
9	Jun 22, 2011 01:38:27 PM	1545.200	PSIA
10	Jun 22, 2011 01:39:26 PM	1539.200	PSIA
11	Jun 22, 2011 01:40:25 PM	1533.600	PSIA
12	Jun 22, 2011 01:41:26 PM	1529.200	PSIA
13	Jun 22, 2011 01:42:26 PM	1524.800	PSIA
14	Jun 22, 2011 01:43:25 PM	1520.200	PSIA
15	Jun 22, 2011 01:44:27 PM	1516.600	PSIA
16	Jun 22, 2011 01:45:26 PM	1512.800	PSIA
17	Jun 22, 2011 01:46:25 PM	1509.200	PSIA
18	Jun 22, 2011 01:47:27 PM	1506.000	PSIA
19	Jun 22, 2011 01:48:26 PM	1502.600	PSIA
20	Jun 22, 2011 01:49:26 PM	1499.800	PSIA
21	Jun 22, 2011 01:50:27 PM	1497.000	PSIA
22	Jun 22, 2011 01:51:26 PM	1494.400	PSIA
23	Jun 22, 2011 01:52:26 PM	1491.200	PSIA
24	Jun 22, 2011 01:53:26 PM	1488.800	PSIA
25	Jun 22, 2011 01:54:27 PM	1486.800	PSIA
26	Jun 22, 2011 01:55:26 PM	1484.200	PSIA
27	Jun 22, 2011 01:56:26 PM	1482.200	PSIA
28	Jun 22, 2011 01:57:27 PM	1480.000	PSIA
29	Jun 22, 2011 01:58:26 PM	1478.000	PSIA
30	Jun 22, 2011 01:59:26 PM	1475.600	PSIA
31	Jun 22, 2011 02:00:27 PM	1473.600	PSIA

Greater Boundary Federal 15-34-8-17 Rate Sheet (6-22-2011)

Step # 1	Time:	6:35	6:40	6:45	6:50	6:55	7:00
	Rate:	100.5	100.5	100.5	100.5	100.4	100.4
	Time:	7:05	7:10	7:15	7:20	7:25	7:30
	Rate:	100.4	100.4	100.4	100.3	100.3	100.3
Step # 2	Time:	7:35	7:40	7:45	7:50	7:55	8:00
	Rate:	200.3	200.3	200.3	200.2	200.2	200.2
	Time:	8:05	8:10	8:15	8:20	8:25	8:30
	Rate:	200.2	200.1	200.1	200.1	200	200
Step # 3	Time:	8:35	8:40	8:45	8:50	8:55	9:00
	Rate:	300.6	300.6	300.5	300.5	300.5	300.5
	Time:	9:05	9:10	9:15	9:20	9:25	9:30
	Rate:	300.4	300.4	300.4	300.4	300.4	300.3
Step # 4	Time:	9:35	9:40	9:45	9:50	9:55	10:00
	Rate:	400.5	400.5	400.5	400.5	400.4	400.4
	Time:	10:05	10:10	10:15	10:20	10:25	10:30
	Rate:	400.4	400.4	400.3	400.3	400.3	400.3
Step # 5	Time:	10:35	10:40	10:45	10:50	10:55	11:00
	Rate:	500.6	500.6	500.5	500.5	500.4	500.4
	Time:	11:05	11:10	11:15	11:20	11:25	11:30
	Rate:	500.4	500.3	500.3	500.3	500.2	500.2
Step # 6	Time:	11:35	11:40	11:45	11:50	11:55	12:00
	Rate:	600.4	600.3	600.3	600.3	600.3	600.3
	Time:	12:05	12:10	12:15	12:20	12:25	12:30
	Rate:	600.2	600.2	600.2	600.1	600.1	600.1
Step # 7	Time:	12:35	12:40	12:45	12:50	12:55	1:00
	Rate:	700.5	700.5	700.5	700.5	700.4	700.4
	Time:	1:05	1:10	1:15	1:20	1:25	1:30
	Rate:	700.4	700.4	700.3	700.3	700.3	700.3
	Time:						
	Rate:						
	Time:						
	Rate:						

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-79017
1. TYPE OF WELL Water Injection Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052		8. WELL NAME and NUMBER: GREATER BOUNDARY FED 15-34-8-17
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0473 FSL 2043 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSE Section: 34 Township: 08.0S Range: 17.0E Meridian: S		9. API NUMBER: 43013326280000
PHONE NUMBER: 435 646-4825 Ext		9. FIELD and POOL or WILDCAT: MONUMENT BUTTE
COUNTY: DUCHESNE		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 11/5/2013	<input type="checkbox"/> ALTER CASING	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR	
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	
	<input type="checkbox"/> CHANGE WELL STATUS	
	<input type="checkbox"/> CHANGE WELL NAME	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	
	<input type="checkbox"/> CONVERT WELL TYPE	
	<input type="checkbox"/> DEEPEN	
	<input type="checkbox"/> FRACTURE TREAT	
	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	
	<input type="checkbox"/> PLUG AND ABANDON	
	<input type="checkbox"/> PLUG BACK	
	<input type="checkbox"/> PRODUCTION START OR RESUME	
	<input type="checkbox"/> RECLAMATION OF WELL SITE	
	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> VENT OR FLARE	
	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	
	<input type="checkbox"/> SI TA STATUS EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input checked="" type="checkbox"/> OTHER	
	OTHER: 5 YR MIT	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. 5 YR MIT performed on the above listed well. On 11/05/2013 the casing was pressured up to 1485 psig and charted for 30 minutes with no pressure loss. The well was not injecting during the test. The tbq pressure was 1038 psig during the test. There was not an EPA representative available to witness the test. EPA #UT22197-07196		
NAME (PLEASE PRINT) Lucy Chavez-Naupoto		PHONE NUMBER 435 646-4874
SIGNATURE N/A		TITLE Water Services Technician
DATE 11/6/2013		Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY November 18, 2013

Mechanical Integrity Test

Casing or Annulus Pressure Mechanical Integrity Test

U.S. Environmental Protection Agency
Underground Injection Control Program
999 18th Street, Suite 500 Denver, CO 80202-2466

EPA Witness: _____ Date: 11/15/13
Test conducted by: Chris Walters
Others present: Mike Jensen

-07196

Well Name: <u>15-34-8-17 Greater Boundary</u>		Type: <u>ER SWD</u>	Status: <u>AC TA UC</u>
Field: <u>Mon Butte</u>			
Location: <u>SW/SE</u> Sec: <u>34</u> T: <u>8</u> N: <u>15</u> R: <u>17</u> E: <u>W</u>		County: <u>Duchesne</u> State: <u>UT</u>	
Operator: <u>Newfield</u>			
Last MIT: <u>1</u>		Maximum Allowable Pressure: <u>1145</u>	PSIG

Is this a regularly scheduled test? ☒ Yes ☐ No
Initial test for permit? ☐ Yes ☒ No
Test after well rework? ☐ Yes ☒ No
Well injecting during test? ☐ Yes ☒ No If Yes, rate: _____ bpd

Pre-test casing/tubing annulus pressure: 1488 psig


MIT DATA TABLE	Test #1	Test #2	Test #3
TUBING	PRESSURE		
Initial Pressure	<u>1038</u> psig	psig	psig
End of test pressure	<u>1038</u> psig	psig	psig
CASING / TUBING	ANNULUS PRESSURE		
0 minutes	<u>1488</u> psig	psig	psig
5 minutes	<u>1487</u> psig	psig	psig
10 minutes	<u>1486</u> psig	psig	psig
15 minutes	<u>1486</u> psig	psig	psig
20 minutes	<u>1485</u> psig	psig	psig
25 minutes	<u>1485</u> psig	psig	psig
30 minutes	<u>1485</u> psig	psig	psig
_____ minutes	psig	psig	psig
_____ minutes	psig	psig	psig
RESULT	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	<input type="checkbox"/> Pass <input type="checkbox"/> Fail	<input type="checkbox"/> Pass <input type="checkbox"/> Fail

Does the annulus pressure build back up after the test? ☐ Yes ☐ No

MECHANICAL INTEGRITY PRESSURE TEST

Additional comments for mechanical integrity pressure test, such as volume of fluid added to annulus and bled back at end of test, reason for failing test (casing head leak, tubing leak, other), etc.:

Signature of Witness: _____

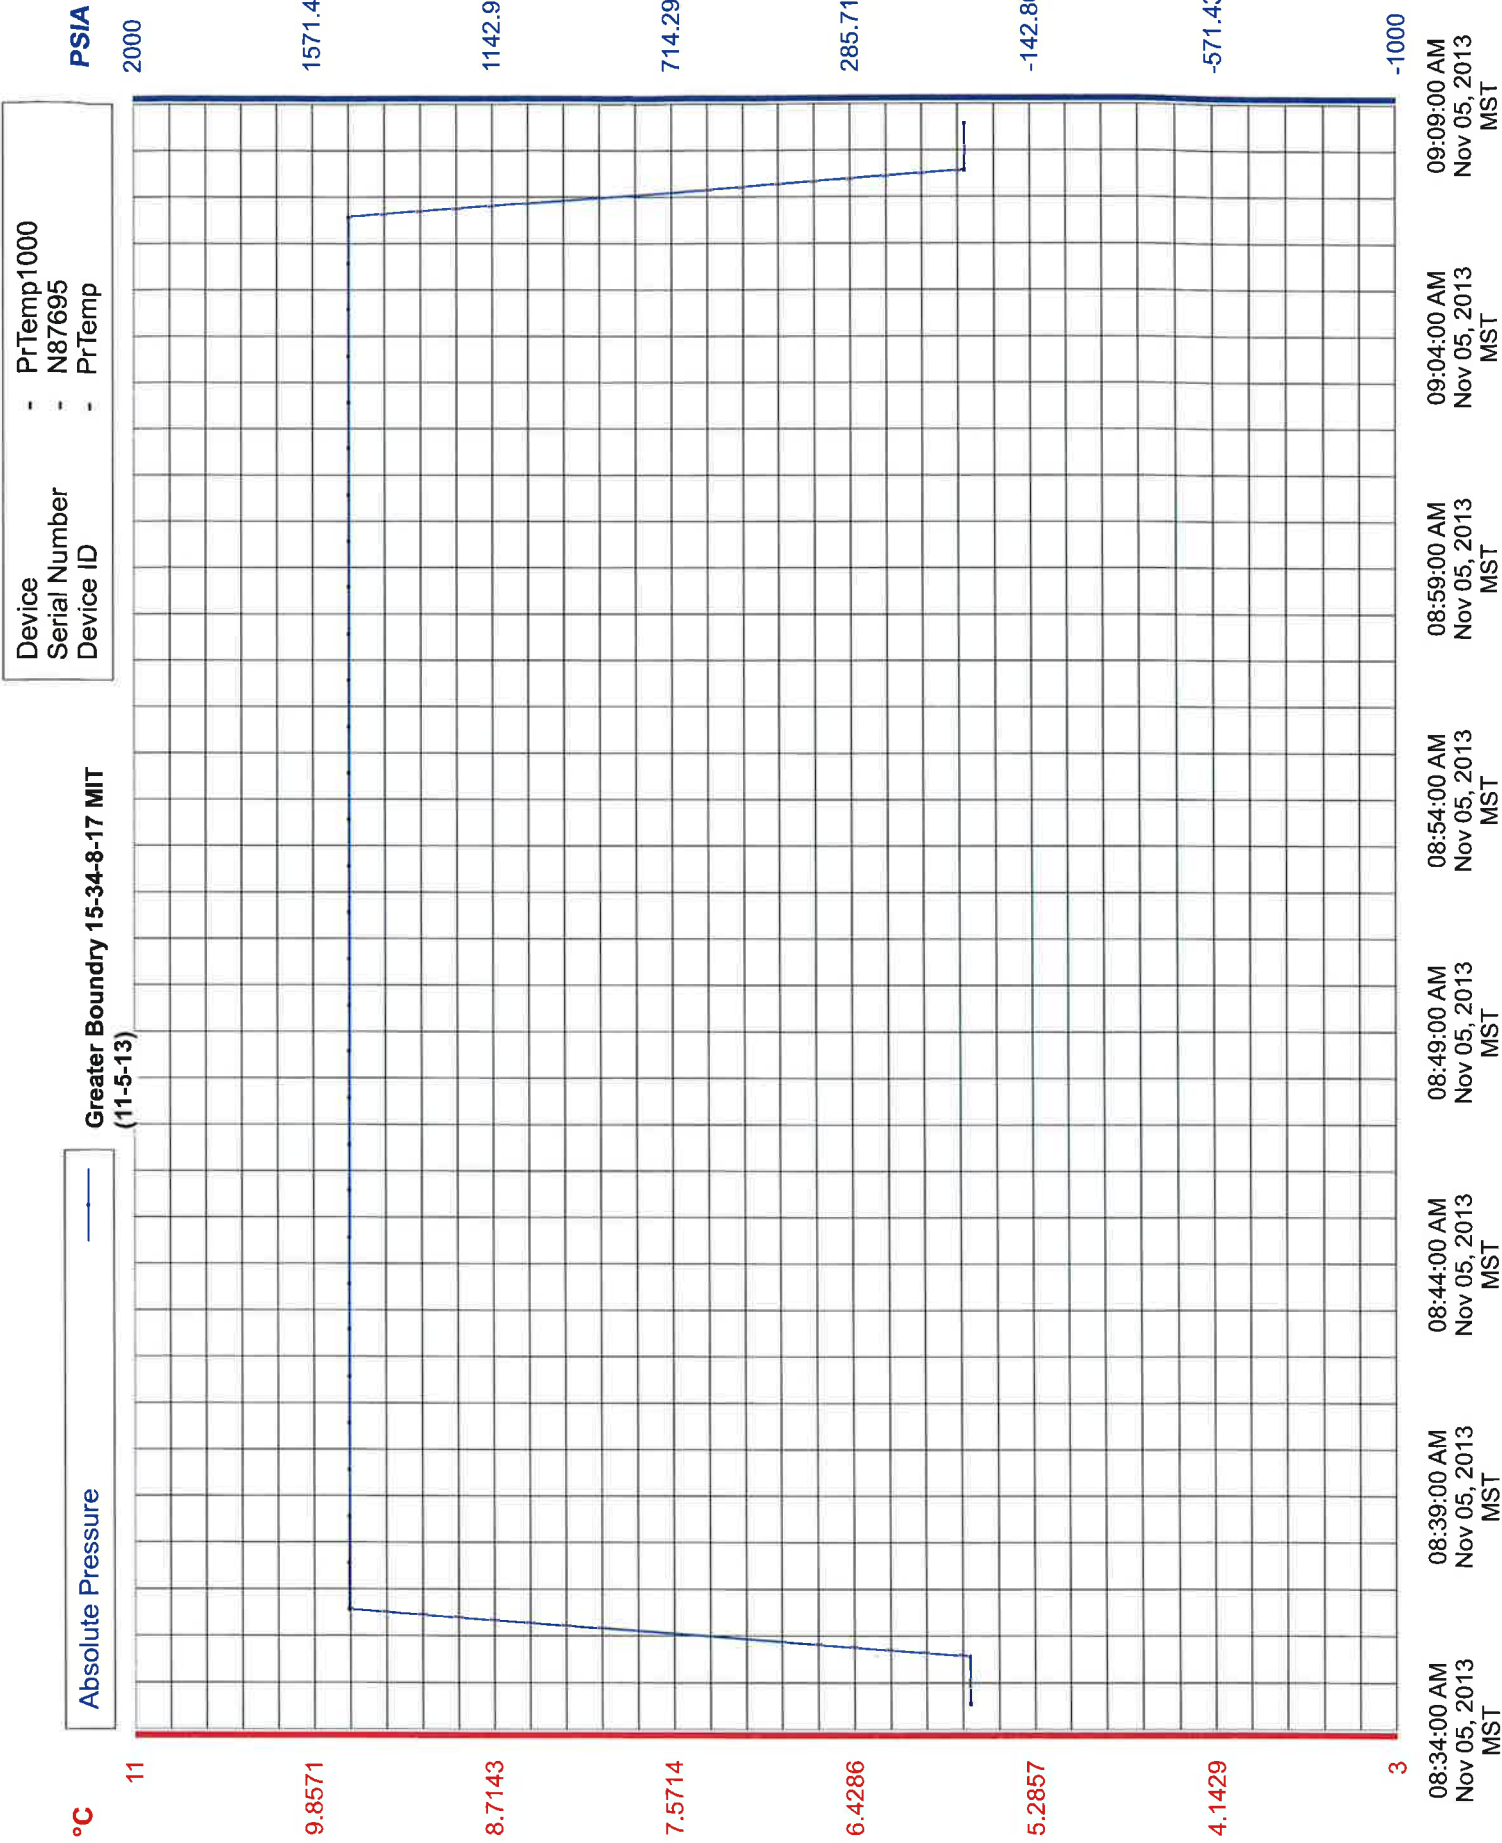

Greater Boundary Federal 15-34-8-17

Spud Date: 6-03-05
Put on Production: 10-03-05
GL: 5052' KB: 5064'

Initial Production: 66 BOPD, 6
MCFD, 49 BWPD

SURFACE CASING

CSG SIZE: 8-5/8"
GRADE: J-55
WEIGHT: 24#
LENGTH: 7 jts (304.51')
DEPTH LANDED: 314.51' KB
HOLE SIZE: 12-1/4"
CEMENT DATA: 160 sxs Class "G" cmt, est 5 bbls cmt to surf.


PRODUCTION CASING

CSG SIZE: 5-1/2"
GRADE: J-55
WEIGHT: 15.5#
LENGTH: 138 jts (6068.08')
DEPTH LANDED: 6066.08' KB
HOLE SIZE: 7-7/8"
CEMENT DATA: 350 sxs Prem. Lite II mixed & 450 sxs 50/50 POZ.
CEMENT TOP AT: 70'

TUBING

SIZE/GRADE/WT.: 2-7/8" / J-55 / 6.5#
NO. OF JOINTS: 133 jts (4134.65')
SEATING NIPPLE: 2-7/8" (1.10')
SN LANDED AT: 4144.65' KB
TOTAL STRING LENGTH: EOT @ 4153.15' KB

Injection Wellbore Diagram

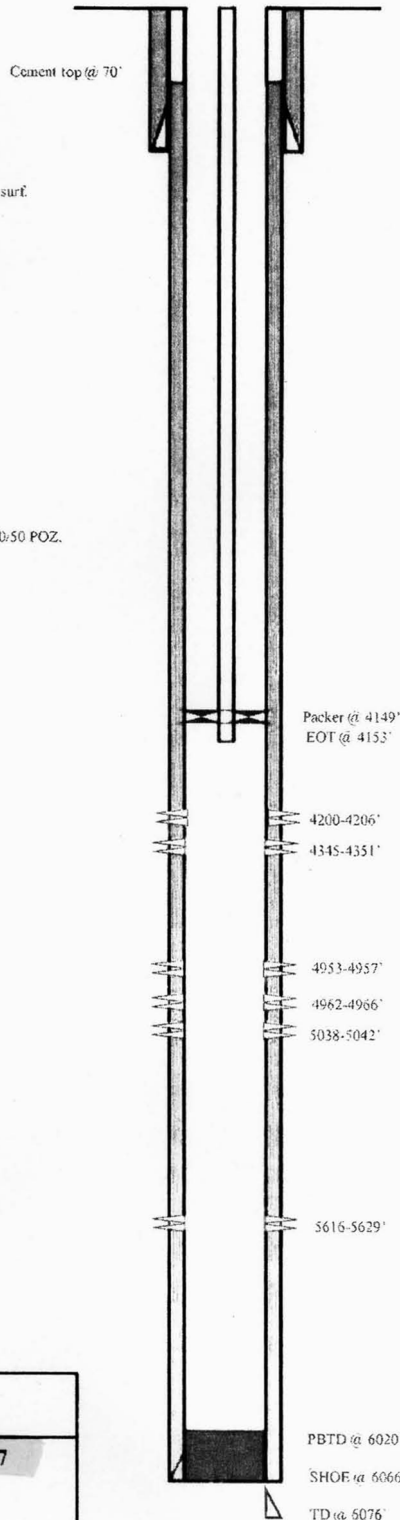

FRAC JOB

09-21-05 5616-5629' **Frac CP1 sands as follows:**
85434# 20/40 sand in 642 bbls Lightning 17
frac fluid. Treated @ avg press of 1258 psi
w/avg rate of 25.2 BPM. ISIP 1630 psi. Calc
flush: 5614 gal. Actual flush: 5628 gal.

09-21-05 4953-5042' **Frac B, S, & C sands as follows:**
75177# 20/40 sand in 572 bbls Lightning 17
frac fluid. Treated @ avg press of 2413 psi
w/avg rate of 27.4 BPM. ISIP 3300 psi. Calc
flush: 4951 gal. Actual flush: 4956 gal.

09-21-05 4345-4351' **Frac GB6 sands as follows:**
19307# 20/40 sand in 258 bbls Lightning 17
frac fluid. Treated @ avg press of 2135 psi
w/avg rate of 25 BPM. ISIP 2110 psi. Calc
flush: 4343 gal. Actual flush: 4368 gal.

09-21-05 4200-4206' **Frac BG2 sands as follows:**
24346# 20/40 sand in 258 bbls Lightning 17
frac fluid. Treated @ avg press of 2168 psi
w/avg rate of 25 BPM. ISIP 3020 psi. Calc
flush: 4198 gal. Actual flush: 4116 gal.

12/4/08
12/23/08
**Well converted to an Injection well.
MUI completed and submitted.**

PERFORATION RECORD

Date	Interval	Tool	Holes
09-13-05	5616-5629'	4 JSPF	52 holes
09-21-05	5038-5042'	4 JSPF	16 holes
09-21-05	4962-4966'	4 JSPF	16 holes
09-21-05	4953-4957'	4 JSPF	16 holes
09-21-05	4345-4351'	4 JSPF	24 holes
09-21-05	4200-4206'	4 JSPF	24 holes

NEWFIELD
Greater Boundary Federal 15-34-8-17
473' FSL & 2043' FEL
SW/SE Section 34-T8S-R17E
Duchesne Co. Utah
API #43-013-32628. Lease #UTU-79017